

ITEM

Technical Manual

DESCRIPTION

SECTION

| Concealed Overhead Transom Closers TC-8800 Series TC-9600 Series TC-9900 Series TC-8800/9600/9900 Series | Versatile Closer Technical Information1:01Assembly Details1:02 - 1:09Extended Spindle Closer Technical Information1:10Universal Closer Technical Information1:11 - 1:12Technical Support1:13 - 1:15 | | | | |
|---|---|---|--|--|--|
| Floor Springs FS-4000 Series FS-6000 Series FS-8500 Series FS-9500 Series FS- Series | Versatile Floor Spring Technical Information Assembly Details Narrow Body Floor Spring Technical Information Assembly Details Compact Body Floor Spring Technical Information Assembly Details Installation and Adjustment Technical Support | 2:01 2:02 - 2:07 2:08 2:09 - 2:11 2:12 2:13 2:14 - 2:15 2:16 | | | |
| Surface Closers FC-1000 Series FC-1500 Series FC-3000 Series | Universal Closer Technical Information Assembly Details Multi-Strength Closer Technical Information Assembly Details Budget / Contract Closer Technical Information Assembly Details | 3:01 3:02 - 3:06 3:07 3:08 - 3:17 3:18 3:19 - 3:22 | | | |
| Panic Exit Device PR-7085 SeriesPR-7085P SeriesPR-7095 SeriesPR-7095P SeriesPR-7100 SeriesPR-7200 SeriesPR-7300 Series | Concealed Rod Crash Bar Technical Information Assembly Details Concealed Rod Paddle Technical Information Assembly Details Rim Mounted Crash Bar Technical Information Assembly Details Rim Mounted Paddle Technical Information Assembly Details Concealed Rod Soft Touch Bar Technical Information Assembly Details Concealed Rod Full Width Soft Touch Bar Technical Information Assembly Details Rim Mounted Soft Touch Bar Technical Information Assembly Details Rim Mounted Soft Touch Bar Technical Information Assembly Details | 4:01 4:02 - 4:08 4:09 4:10 - 4:14 4:15 4:16 - 4:20 4:21 4:22 - 4:25 4:26 4:27 - 4:35 4:36 4:37 - 4:39 4:40 4:41 - 4:45 | | | |
| PR-7000 Series | Assembly Details Technical Support | 4:41 - 4:45 4:46 - 4.47 | | | |



ITEM

Technical Manual

DESCRIPTION

SECTION

| Flush Bolt FB-6200 Series FB-6300 Series FB-6400 Series FB-6500 Series | Flush Bolt 23mm Wide Technical Information Flush Bolt 25mm Wide Technical Information Flush Bolt 20mm Wide Technical Information Flush Bolt Cylinder Operated Technical Information | 5:01 - 5:02 5:03 5:04 5:05 - 5:06 |
|---|--|--|
| Handles HD-80 Series HD-90 Series HD-92 Series HD-91 Series HD-48 Series HD-Series WH-Series WH-Series DH-Series | Aluminium Tube Technical Information Aluminium Pad Technical Information Aluminium Pad Technical Information Stainless Steel Pull Technical Information Stainless Steel Flush Pull Technical Information Stainless Steel Handle Maintenance Information Window Handles Technical Information Window Handles Product Codes Door Handles Technical Information & Product Codes | 6:01 - 6:02 6:05 6:06 6:07 - 6:14 6:15 6:16 6:17 6:18 6:19 |
| Locks, Latches, Paddle and Lever Handles LK-1800 Series LK-2100 Series ES-2200 Series PH-2100 Series LK-2100-75/76 | Hook Lock Technical Information Dead Latch Technical Information Electric Strike Technical Information Paddle Handle Technical Information Rim Cylinder and Thumb Turn | 7:01 - 7:06 7:07 - 7:15 7:16 - 7:18 7:19 - 7-20 7:21 |
| Letter Plates LP-500 Series | Letter Plates Technical Information | 8:01 - 8:03 |



TITLE VERSATILE CONCEALED OVERHEAD TC-8800 SERIES TRANSOM CLOSER

SUB TITLE TECHNICAL INFORMATION

| DOOR LEAF | CLOSER SIZE | CLOSING FORCE | NO HOLD | HOLD OPEN 90° | HOLD OPEN 105° | | | | |
|---------------|-------------|---------------|--------------|---------------|----------------|--|--|--|--|
| WIDTH | | in Nm (kpm) | PRODUCT CODE | | | | | | |
| Up to 750mm | 1 | 20 (2.0) | 8801-00 | 8801-90 | | | | | |
| 751 to 950mm | 2 | 27 (2.7) | 8802-00 | 8802-90 | 8802-105 | | | | |
| 951 to 1150mm | 3 | 33 (3.3) | 8803-00 | 8803-90 | | | | | |

SHIPPING WEIGHT 4:46KG

PRODUCT CODE

TC-8800

SELECT SIZE SMALLER FOR INTERNAL DOORS.

SELECT SIZE LARGER FOR DOORS IN SEVERE CONDITIONS.

SPINDLE SIZES:

Standard size = 14mm O/A


Extended sizes = 5mm (19mm O/A), 10mm (24mm O/A), and 15mm (29mm O/A)

APPLICATIONS Double or single action. Centre hung offset pivot with special arm. Side load and end fittings. 65mm pivot point & 70mm pivot point.

BODY UNIT AND

FIXINGS

DUMMY BODY UNIT

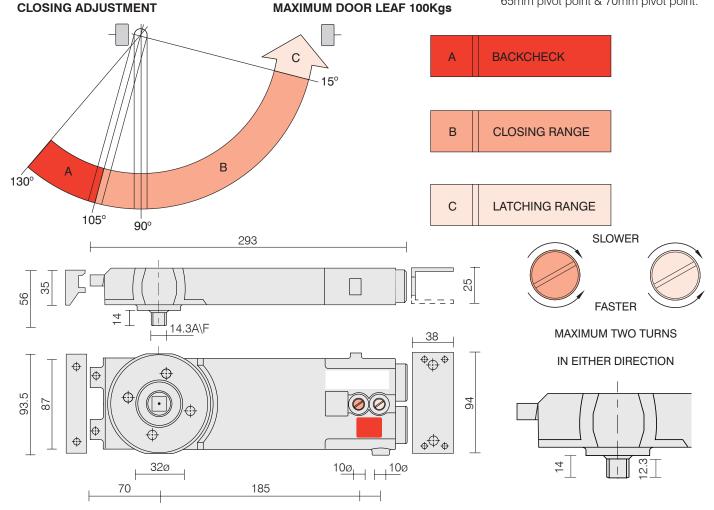

GUARANTEE

AXIM TRANSOM CLOSERS AND ACCESSORIES ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE.




SCALENTS @A4DATESEPTEMBER 2023



TITLE VERSATILE CONCEALED OVERHEAD TC-8800 SERIES TRANSOM CLOSER

SHEET No. 1:02

SUB TITLE ASSEMBLY DETAILS

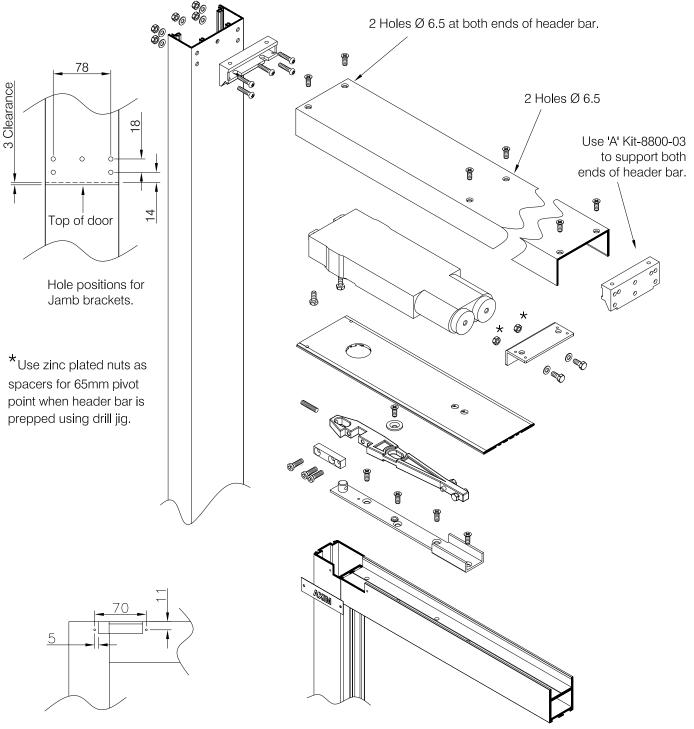

Hole positions for bolt access cover.




The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2017 |

| $(\Delta \Lambda \geq \zeta $ |
|--|
| |
| ARCHITECTURAL HARDWARE |
| ANOTHEOTOTIAL HANDWARE |

| TITLE | VERSATILE CONCEALED OVERHEAD TC-8800 SERIES TRANSOM CLOSER | SHEET No. 1:03 |
|-----------|---|--------------------------|
| SUB TITLE | BOTTOM PIVOT ASSEMBLY TC-8800-02 | |

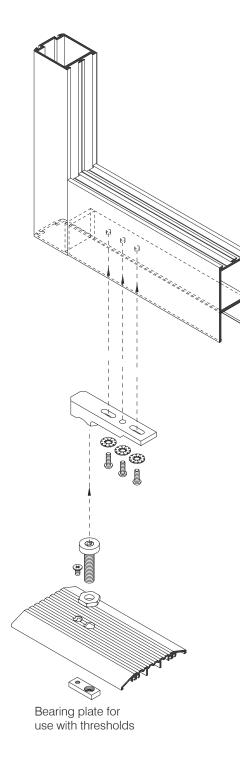

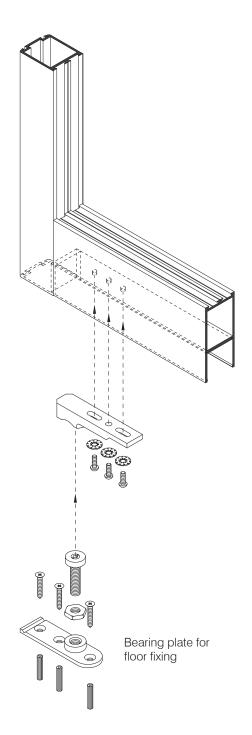

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



TITLE **VERSATILE CONCEALED OVERHEAD TC-8800 SERIES TRANSOM CLOSER**

SHEET No. 1:04


00 00 mm


Ť

Ĩ

0

SUB TITLE **TOP ARM & CHANNEL ASSEMBLIES**

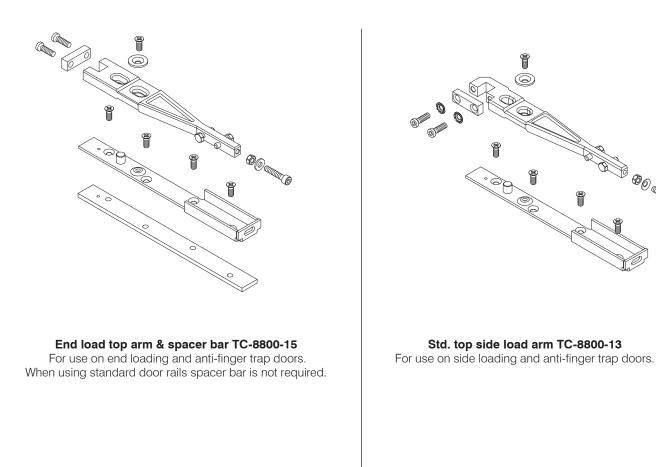

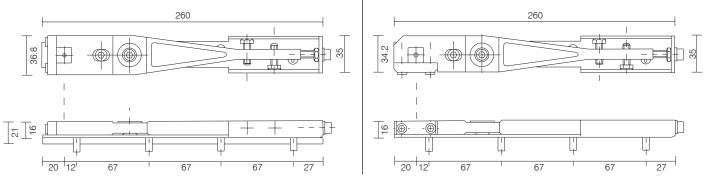






TITLE VERSATILE CONCEALED OVERHEAD TC-8800 SERIES TRANSOM CLOSER

SHEET No. 1:05

SUB TITLE TOP ARM & CHANNEL ASSEMBLIES

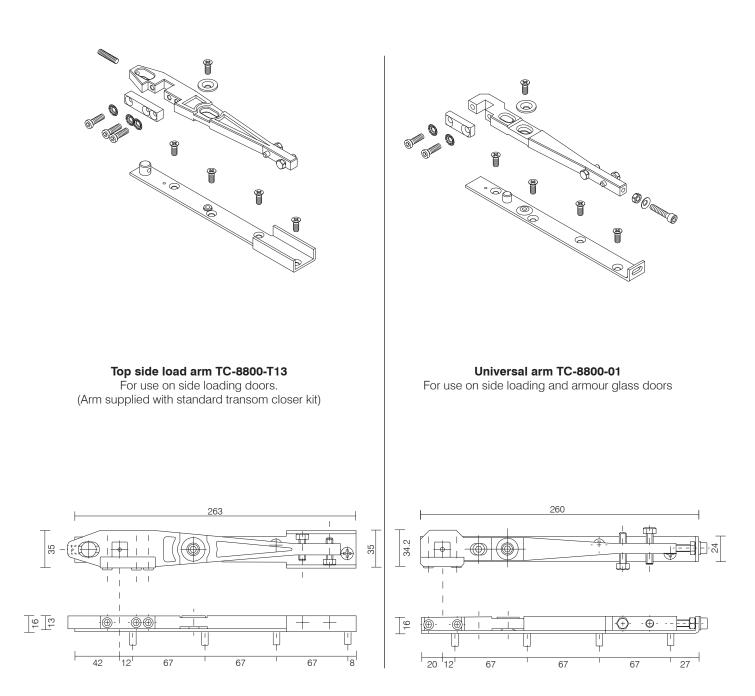




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2017 |




SUB TITLE BOTTOM PIVOT ASSEMBLIES



Std bottom pivot assembly **TC-8800-02**



Heavy duty bottom pivot assembly **TC-9500-17.** Used with anti finger-trap doors



End load bottom pivot assembly **TC-8800-14**



Alternative bottom bearing plate for use with thresholds supplied as standard with all bottom pivot assemblies



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



TITLE VERSATILE CONCEALED OVERHEAD TC-8800-20 SERIES TRANSOM CLOSER SHEET No. 1:07

SUB TITLE INTENTIONALLY BLANK

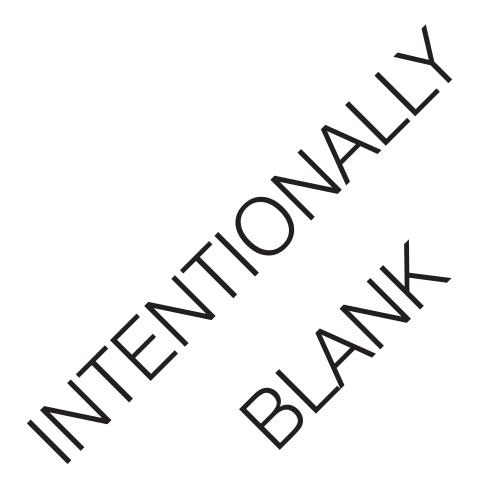




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk
 SCALE
 NTS @A4

 DATE
 NOVEMBER 2019

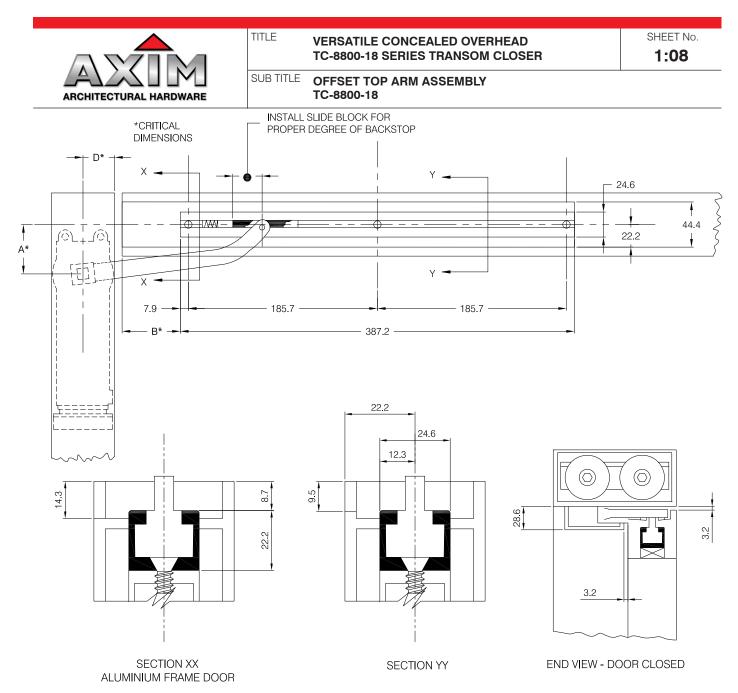

DETERMINE HOW DOOR IS HUNG AND DEGREE OF CLOSER BACKSTOP AND USE APPLICABLE CHART

HEADER PREPARATION:

- 1. DIMENSION 'A', face of jamb to centre line of spindle must be maintained.
- 2. DIMENSION 'D', pivot of hinge side of header to centre line of spindle must be maintained regardless of header width.
- 3. All spacers and/or anchors other than standard 'F' clip package by others.

DOOR PREPARATION:

- 1. Rout out top rail as shown, for side channel spacers as required by manufacturer.
- 2. Rout inside face of top rail as shown for arm.
- 3. Offset pivots or butts by others.


| STAND MINII | | JTT HIN)1.6mm | | | 19.1mm MINI | FLUS | ET PIVO 6H DOOI 01.6mm | 7 | | 15.9 mm OFFSET PIVOTED DOOR 3.2mm RECESSED DOOR MINIMUM 114.3mm HEADER | | | | |
|----------------|-----------|--------------------------|-----------|-----------|----------------|-----------|------------------------------|-----------|-----------|--|-----------|-----------|-----------|-----------|
| Backstop | A (mm) | B (mm) | C (mm) | D (mm) | Backstop | A (mm) | B (mm) | C (mm) | D (mm) | Backstop | A (mm) | B (mm) | C (mm) | D (mm) |
| 105° | 95.25 | 98.4 | 66.7 | 50.8 | 105° | 114.3 | 119.1 | 85.7 | 50.8 | 105° | 114.3 | 119.1 | 85.7 | 54.0 |
| 90° | 73 | 103.2 | 44.5 | 50.8 | 90° | 95.25 | 125.4 | 60.3 | 50.8 | 90° | 95.25 | 125.4 | 60.3 | 54.0 |



The Parkside Group Ltd

| The Willow Centre |
|--|
| 17 Willow Lane, Mitcham, Surrey, CR4 4NX |
| Tel: 020-8685 9685 Fax: 020-8646 5096 |
| Email: axim@parksidegroup.co.uk |
| Web Site: www.axim.co.uk |
| |

SCALENTS @A4DATEAUGUST 2017

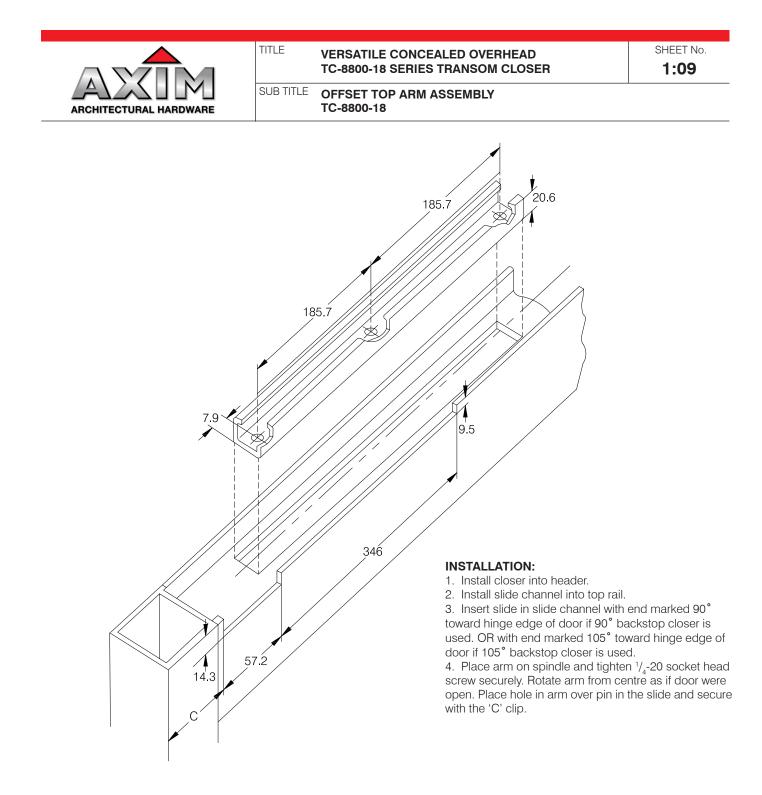



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALENTS @A4DATEAUGUST 2017



EXTENDED SPINDLE CONCEALED OVERHEAD **TC-9600 SERIES TRANSOM CLOSER**


SHEET No.

1:10

SUB TITLE TECHNICAL INFORMATION

TITLE

| DOOR LEAF WIDTH | CLOSER SIZE | CLOSING FORCE in Nm (kpm) | NO HO | | HO ICT CODE | LD OPEN 90° |
|--|-------------------|----------------------------------|-------------------------------|---------------------------|---|---|
| Jp to 750mm 751 to 950mm 951 to 1150mm | 1 2 3 | 20 (2.0) 27 (2.7) 33 (3.3) | 9601-00 9602-00 9603-00 |)-E)-E | | 9601-90-E 9602-90-E 9603-90-E PING WEIGHT 4:46KC |
| | | | | BODY UN FIXIN | | PRODUCT CODE |
| | | | | DUMMY BOI | DY UNIT | TC-9600-E |
| SELECT SIZE LARG | ER FOR DOORS IN S | EVERE CONDITIONS. | | Double | CATIONS e or single ac | tion. |
| | | | | Centre Side lo | or single ac | pivot with special arn |
| SELECT SIZE LARG | | | DR LEAF 100Kgs | Centre Side lo | e or single ac hung offset ad and end f | pivot with special arm |
| | | | | Centre Side lo 70mm | e or single ac hung offset ad and end f | pivot with special arn fittings. |

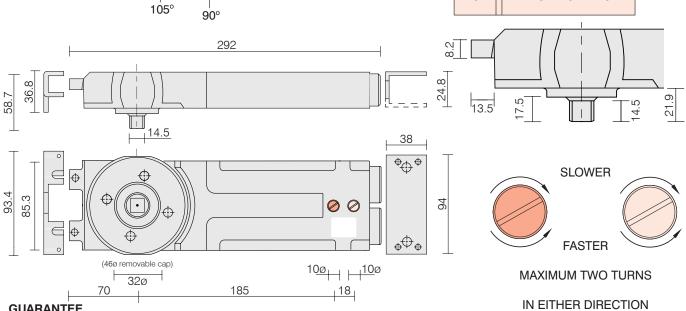

С

LATCHING RANGE

GUARANTEE

AXIM TRANSOM CLOSERS AND ACCESSORIES ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT INFORMATION WITHOUT PRIOR NOTICE





UNIVERSAL CONCEALED OVERHEAD TC-9900 SERIES TRANSOM CLOSER

SUB TITLE **TECHNICAL INFORMATION**

TITLE

The Axim 9900 series door closer has been developed to provide the market with a truly universal door closer. This closer will offer the answer for new installations and for door maintenance where other leading transom closers have failed and a replacement closer is necessary.

MODEL SELECTION TABLE

| DOOR LEAF | CLOSER SIZE | CLOSING FORCE | NO HOLD | HOLD OPEN 90° |
|---------------|-------------|---------------|---------|-------------------------|
| WIDTH | | in Nm | PRODUC | CT CODE |
| Up to 750mm | 1 | 20 | 9901-00 | 9901-90 |
| 751 to 950mm | 2 | 27 | 9902-00 | 9902-90 |
| 951 to 1150mm | 3 | 33 | 9903-00 | 9903-90 |
| | | | | SHIPPING WEIGHT 4.5 kgs |

CLOSING ADJUSTMENT

105°

14.5

С

70

(46ø removable cap)

32ø

0

 \cap

9⁰°

130

C

00

c

85.

В

SELECT A SIZE SMALLER FOR INTERNAL DOORS SELECT SIZE LARGER FOR DOORS IN SEVERE CONDITIONS

APPLICATIONS

Double or single action. Centre hung or offset pivot with special arm. Side load and end load fittings. 70mm pivot point

REPLACEMENTS

Will replace Axim 8800 series, Dorma, Peters Jackson, Newman, Tonks, Ryobi and other leading transom closers without costly modifications to door or frame. Universal fittings included.

TECHNICAL INFORMATION

Independent, fully adjustable closing and latching speed controls with captivated screws preventing accidental removal.

3 power sizes, suitable for doors up to 1150mm wide and 100 Kgs. in weight.


Mechanical backcheck protects doors and closer when opening past 105°.

Fitting instructions are supplied with each body unit with a separate sheet covering replacement procedures.

GUARANTEE

AXIM TRANSOM CLOSERS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE THIS PRODUCT INFORMA-TION WITHOUT PRIOR NOTICE



The Parkside Group Ltd

 \in 0

0 \subseteq

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

BODY UNIT AND PRODUCT CODE FIXINGS DUMMY BODY UNIT TC-9900 Independent valve screws permit closing speed adjustment from fully open to 15° and 15° to closed. BACKCHECK CLOSING RANGE В LATCHING RANGE С SLOWER FASTER MAXIMUM TWO TURNS IN EITHER DIRECTION 292 38 ⊕⊕

> SEPTEMBER 2023 For scaled technical or CAD drawings,

NTS @A4

🚫 🚫

18

___10ø

6

⊕⊕⊕

please contact AXIM.

10ø_

186

SCALE

DATE



UNIVERSAL CONCEALED OVERHEAD TC-9900 SERIES ADJUSTABLE TRANSOM CLOSER

SUB TITLE **TECHNICAL INFORMATION**

The Axim 9900 series door closer has been developed to provide the market with a truly universal door closer. This closer will offer the answer for new installations and for door maintenance where other leading transom closers have failed and a replacement closer is necessary.

MODEL SELECTION TABLE

| DOOR LEAF | CLOSER SIZE | CLOSING FORCE | NO HOLD | HOLD OPEN 90° |
|----------------|-------------|---------------|-------------|-------------------------|
| WIDTH | | in Nm | PRODUC | TCODE |
| 750mm - 1150mm | 1-4 | 9-37 | 9900-ADJ-00 | 9900-ADJ-90 |
| | | | | SHIPPING WEIGHT 4.5 kgs |

SELECT A SIZE SMALLER FOR INTERNAL DOORS SELECT SIZE LARGER FOR DOORS IN SEVERE CONDITIONS

TITLE

APPLICATIONS Double action. Centre hung. 70mm pivot point.

REPLACEMENTS

Will replace Axim 8800 series, Dorma, Peters Jackson, Newman, Tonks, Ryobi and other leading transom closers without costly modifications to door or frame. Universal fittings included.

TECHNICAL INFORMATION

Independent, fully adjustable closing and latching speed controls with captivated screws preventing accidental removal.

4 power sizes, suitable for doors up to 1150mm wide and 100 Kgs. in weight.

Fitting instructions are supplied with each body unit with a separate sheet covering replacement procedures.

Independent valve screws permit closing speed adjustment from fully open to 15° and 15° to closed.

FASTER

MAXIMUM TWO TURNS IN EITHER DIRECTION

3

 $+5 \sim +7$

4


+8

PRODUCT CODE

TC-9900

TC-9900-03

TC-9900-23

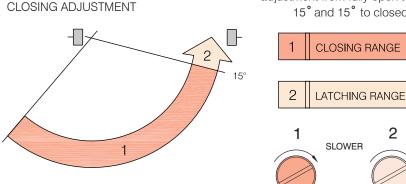

BODY UNIT AND

FIXINGS

CLOSER BRACKET SET

DUMMY BODY UNIT

SAPCER BAR

 $\circ \bigcirc$ 93.5 50.8 <u>80</u> Ð 30 185 18 58.3 63.5 22 292 56.5 44.3 38

Ø Ø

CLOSER SIZE

2

 $+2 \sim +4$

1

+0

NUMBER

OF TURNS

GUARANTEE

AXIM TRANSOM CLOSERS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE THIS PRODUCT INFORMATION WITHOUT PRIOR NOTICE



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

NOTE: Use 4mm Allen key supplied by others

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |




SUB TITLE TECHNICAL SUPPORT

Introduction

Axim door closers and accessories are guaranteed for a period of 30 months from the date of manufacture against defect in material and workmanship. The guarantee is void if the product has been incorrectly installed or damaged in use. The following notes on maintenance should ensure the closer will operate trouble free for many years.

TITLE

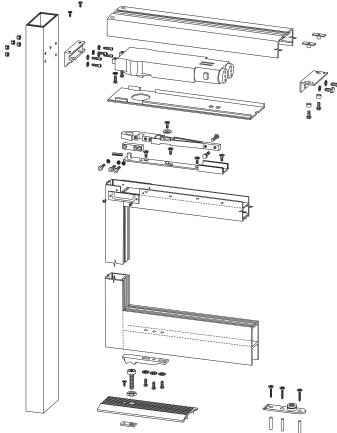

Identification

Stamping on the end of the spindle should read N.H.O or H.O.90 referring to the retention option. A number on the circular cover cap relates to spring power size & type:

| 25 = SIZE 1 NO HOLD | TC8801-00; TC9601-00E; TC9901-00 |
|-----------------------|-----------------------------------|
| 26 = SIZE 1 HOLD OPEN | TC-8801-90; TC9601-90E; TC9901-90 |
| 35 = SIZE 2 NO HOLD | TC-8802-00; TC9602-00E; TC9902-00 |
| 36 = SIZE 2 HOLD OPEN | TC-8802-90, TC9602-90E, TC9902-90 |
| 45 = SIZE 3 NO HOLD | TC-8803-00; TC9603-00E; TC9903-90 |
| 46 = SIZE 3 HOLD OPEN | TC-8803-90, TC9603-90E; TC9903-90 |

Date Stamp

A date stamp on the closer body, for example: 35-18 = Week 35, 2018 this will determine if the closer is within the warranty period. If the closer is faulty and still under guarantee please contact your supplier before undertaking any further work.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

The set of door controls comprises three main items. Firstly, a sealed unit 'the closer body' which is fitted inside the transom bar above the door and concealed with a removable cover plate. Secondly, a steel drive arm with a steel fixing channel fitted inside the top rail of the door 'the drive arm' which may be side or end loading. Finally the door is supported by a 'bottom pivot assembly'. This consists of a shoe fitted to the underside of the door and a pivot bolt, either fitted to a floor-fixed plate or directly fixed to an aluminium threshold.

Closer body

Broadly speaking there are six different closer options with the same external appearance. Closers are fitted with different size internal springs to give light, medium or heavy closing forces. Depending on varying factors such as weather conditions and width and height of the door the correct strength closer should be selected. Closers are also specified 'retention' or 'non-retention'. The former, sometimes referred to as hold-open, hold the door open at 90 degrees whilst the latter, sometimes named no hold-open, will return the door to a closed position regardless of the angle at which it is released. It is important not to wedge the door open as the wedge or stop will oppose the door closer and in time will twist the door.

It is important to realise closers can not be altered in the field and if necessary the closer would require exchanging for an alternative option.

Doors using this type of door closer are generally centre hung and double acting, i.e the door will open in and out unless prevented from doing so by an applied stop. Door closers will open to 130°. Door stops should be fitted to prevent the door striking the jamb or opening past this angle, as damage could occur to the door, frame, and/or closer.

Removing the door

Should it be necessary to change the door closer, this is not a difficult job and should take no more than an hour. Tools required:-Small and medium sized pozi head screwdrivers, 4mm and 5mm allen keys and a 10mm open-ended spanner.

Remove the name plate from the internal face of the door to expose the clamp block and fixings. Using an allen key remove the socket head bolts and special lock washers and put to one side. With someone to steady the door from outside, push the door away from the closer spindle, the door may require tapping gently with a soft faced mallet. Once the door is released from the spindle the door can be lifted off the bottom pivot.

Stack the door in a safe place. Remove the M4 screws from the cover plate and prise the cover plate free. The closer body is now visible and reference marks should be noted.

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



Changing the closer unit

With a screwdriver loosen the two round head pozi screws connecting the closer to the jamb bracket.

Support the closer and remove the two hexagon head bolts and washers. The closer can now be lowered and removed. Take care not to drop it, the closer weighs 4 Kgs. (8.8lbs.)

TITLE

Whilst the closer is removed check the fixings in the jamb bracket and tighten securely if loose. Check the steel angle bracket is secure within the header bar. Examine the pivot bearing in the threshold or floor plate, the bearing should be able to rotate freely and the 1/2" bolt should be secure.

To replace the closer reverse the removal procedure and ensure the clamp block screws and lock washers are very tight. If door adjustment is required refer to the section ALIGNMENT.

Fault diagnosis

The following notes should enable a competent maintenance manager to rectify any problems that might occur. If in any doubt please contact the manufacturer as the wrong action could invalidate the warranty.

The door does not centre firmly but swings freely perhaps screw and check other fixings. for a centimetre either side of the closer position. This is usually due to the clamp block not being fully tightened. The door moves loosely of the clamp block not being fully tightened.

Remove the small aluminium name plate from the door to expose the clamp block and screws. With an allen key wind in the two or three screws, depending on the arm type, very tightly. Refit the name plate.

2) The door does not centre firmly as in item 1) and has even more free play.

It is possible the clamp block has been too loose for too long and the closer spindle has worn if this is the case carry out the remedy as in item 1). If the problem persists the closer and/or top drive arm in the door will need replacing. Note this is not a fault of the closer or accessories but is due to indifferent installation.

3) The door comes to rest firmly but is up to 25mm off centre.

Procure a step ladder, or other means, enabling you to look down on to the top rail of the door. Loosen the hold-down, countersunk screw, securing the top arm, with an allen key. Adjust the hexagon bolts against the sides of the steel channel until the door centres in the correct position. Tighten the holddown screw and check other fixings.

4) The door drags on the floor/threshold or rubs on the underside of the transom.

Procure a step ladder, or other means, enabling you to look down on to the top rail of the door. Loosen the hold-down, countersunk screw, securing the top arm, with an allen key and loosen off the hexagon bolts slightly.

a) Standard top arm type:

With the door open use a flat bladed screwdriver to turn the screw clockwise, lifting the door or anticlockwise lowering the door.

b) End load arm or special side loading:

Loosen the locknut against the upstand of the channel and turn the socket head screw with an allen key, clockwise, lifting the door or anticlockwise lowering the door. Tighten the hold-down screw and check other fixings.

5) The door moves loosely off centre apparently out of control.

The closer has been forced and strained for some reason and the internal parts have been damaged. The closer will need replacing.

6) Oil leaking.

Before despatch each closer is subjected to stringent tests to ensure against leaking. If oil appears to be leaking from the closer try to pin point the source. If leaking from around the spindle the seal may be damaged. If leaking from around one of the valve screws the same could apply. Providing the closer is within the warranty period and has not been subjected to misuse it will be replaced.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



Six monthly maintenance

Detach the door as previously described, remove the coverplate and expose the closer. Tighten all fixing screws and bolts. Inspect the floor bearing and wipe away any debris, check the bearing rotates freely and the bolt is secured firmly in the plate or threshold. Lubricate with grease if necessary. Tighten all fixings, including the three screws to the bottom rail of the door securing the pivot shoe. Replace the coverplate and remount the door. Tighten all the top arm fixings, particularly the clamp block screws and centre locking screw. Replace the name plate and clean down the door as per finishers recommendations.

TITLE

Closing speed adjustment

Providing the closing and final latching speeds of the door closer have been correctly set on installation it should not be necessary to readjust at a later date. However, after the door closer has completed a short settling in period, minor adjustments may be required. It should be noted that inexperienced tampering with the valve screws would cause irreparable damage. The following notes will enable the operator to make simple adjustments – if in any doubt please seek advise from the manufacturer.

It is important to realise that the two valve screws will adjust the closing and latching speeds of the door closer, they will not adjust the closing or opening forces in any way. It is very likely the door closer will require only very minor adjustment, perhaps only one half turn of the valve screw. After any adjustment the door closing speed should be checked twice, by opening the door fully and allowing it to close, before proceeding.

Care must be taken not to unscrew the valve head beyond the level of the closer body when increasing the closing speed. Turning the valve past this limit will allow oil to escape and the closer will need to be replaced. On the other hand if the valve is turned clockwise, decreasing the closing speed, adjustment must cease when resistance is felt as will be damaged along with the oil seal if excessive force is used.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALENTS @A4DATEMARCH 2014



TITLE VERSATILE FLOOR SPRING FS-4000 SERIES

TECHNICAL INFORMATION

SUB TITLE

UNIVERSAL APPLICATION

Suitable for left hand, right hand, single and double action doors. No hold and 90° hold open options. 105° hold open available on special order. Medium strength spring for 100kg doors up to 1200mm wide. Light spring for 100kg doors up to 914mm wide.

DOOR CONTROL

Two separate valve screws control the closing and latching speeds independently. The closing action starts with the door fully open and ends at 15° from the closed position. At this point the latching valve takes over, thus allowing the door to close at the desired speed.

BACKCHECK

 130° backcheck prevents damage to doors in windy conditions or where the door swing is limited to 90° .

FULLY ADJUSTABLE

The FS4000 floor spring is positionally adjustable for height, width, length and diagonally within the zinc plated cement box.

SPINDLES

* Please specify the type of spindle required. 4000-NS model available without fitted spindle and will accept our range of spindle inserts.

Extended spindles available for varying height requirements.

Spindles stocked to suit a wide range of fittings from other manufacturers.

ACCESSORIES

Double action door straps, forged steel and zinc plated, for square or flat rectangular spindles.

Retractable top centre, die cast aluminium. Door part with adjustable bronze bearing complete with fixings. Two finishes available: Silver, Product Code FS-4000-0114. Bronze, Product Code FS-4000-0214.


ADDITIONAL CEMENT BOX Product Code FS-4000-15.


SPECIAL ORDER OPTIONS


Hold open 85°, 105°, and 120°. Light spring 15Nm (for narrow width and light doors).

COVER PLATES

160mm x 328mm cover plates in three finishes. Stainless steel, Product code FS-4000-01.

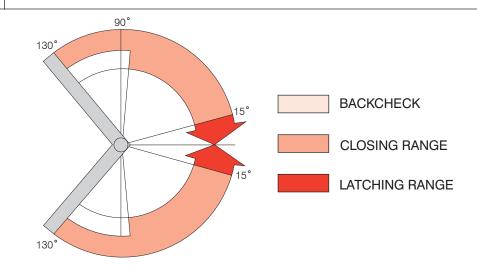






| DOOR WIDTH SPRING | | CLOSING | NO HOLD OPEN | HOLD OPEN 90° |
|-------------------|----------|----------------------|--------------|---------------|
| in mm | STRENGTH | FORCE in Nm (Kpm) | PRODUC | T CODES |
| 915-1200 | Medium | 28 (2.8) | 4002-00-NS | 4002-90-NS |
| Up to 914 | Light | 18 (1.8) | 4001-00-NS | 4001-90-NS |

RETRACTABLE TOP CENTRE FS-4000-0114 SVR



GUARANTEE

AXIM FLOOR SPRINGS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2023 |



| TITLE | VERSATILE FLOOR SPRING |
|-------|------------------------|
| | FS-4000 SERIES |


SHEET No. 2:02

SUB TITLE **ASSEMBLY DETAILS**

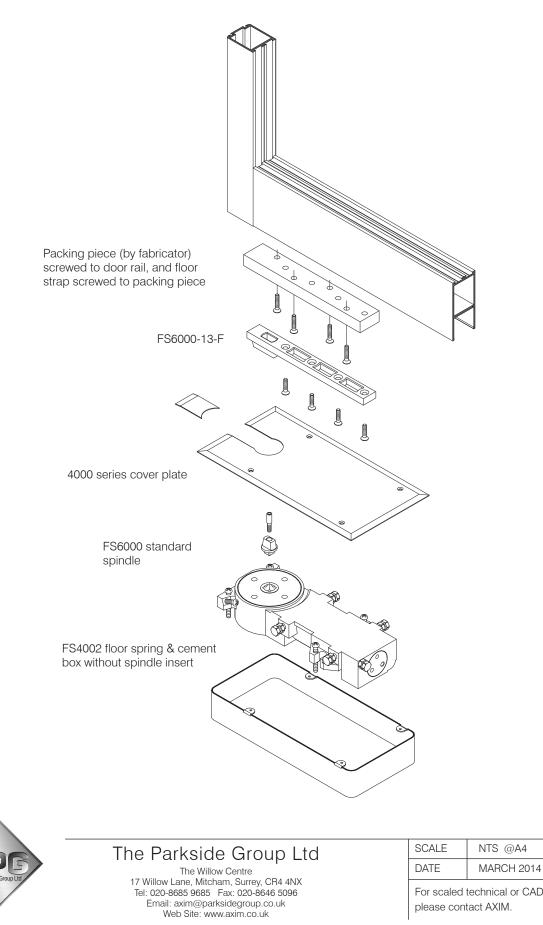




SUB TITLE FLOOR SPRING DIMENSIONS

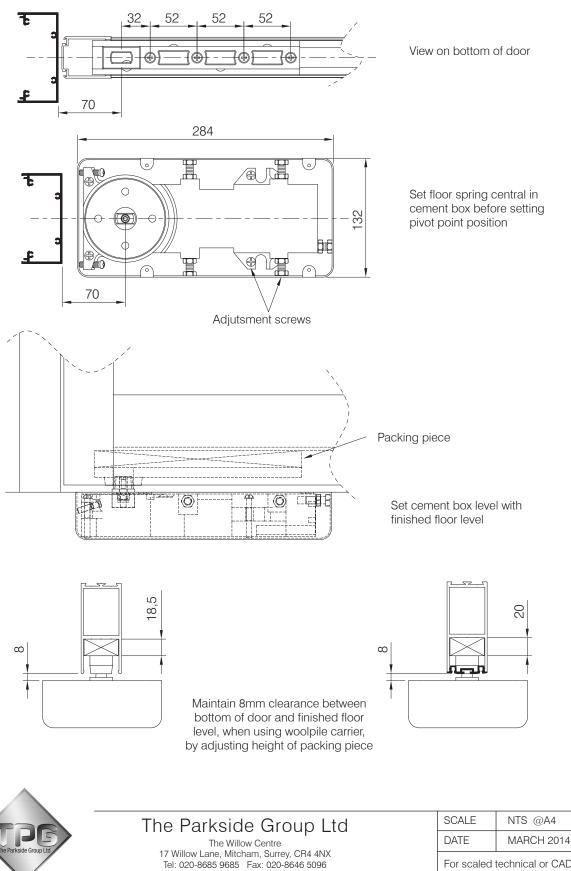

Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk



| TITLE | VERSATILE FLOOR SPRING FS-SERIES | SHEET No. 2:04 |
|-----------|---|--------------------------|
| SUB TITLE | RETRACTABLE TOP CENTRE PIVOT DETAILS FS-6000 - 0114 & FS-6000 - 0115 | |

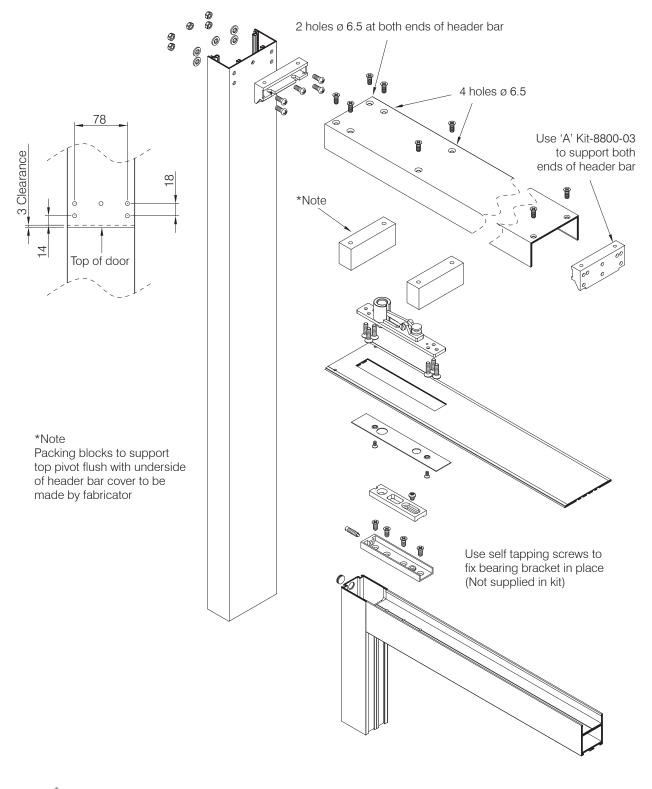





The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | FEB 2022 |

| | TITLE | VERSATILE FLOOR SPRING FS-SERIES | SHEET No. 2:05 |
|------------------------|-----------|---|--------------------------|
| ARCHITECTURAL HARDWARE | SUB TITLE | RETRACTABLE TOP CENTRE PIVOT DETAIL FS-6000 - 0114 | <u> </u> |

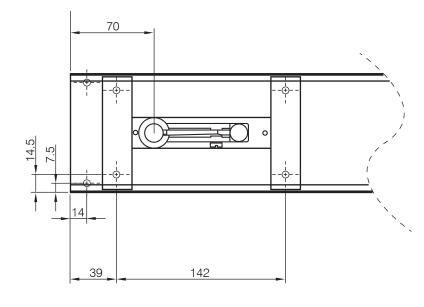

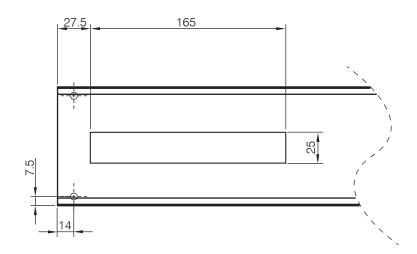

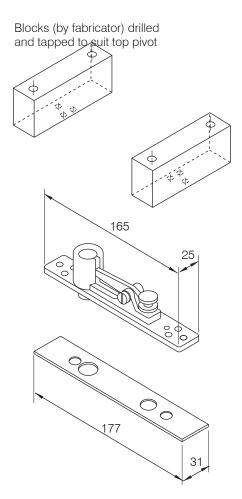









Note:

For anti finger trap doors with auto closers use AXIM TC8800 dummy transom closer with standard bottom pivot




AXIM FS-6000-0115



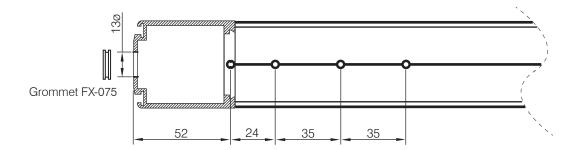

122

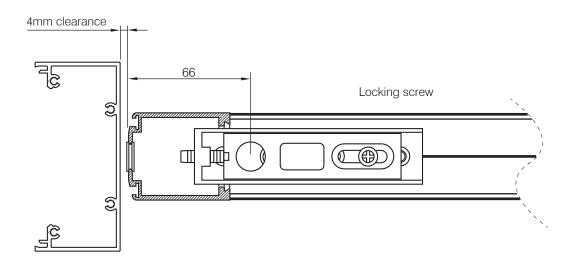




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

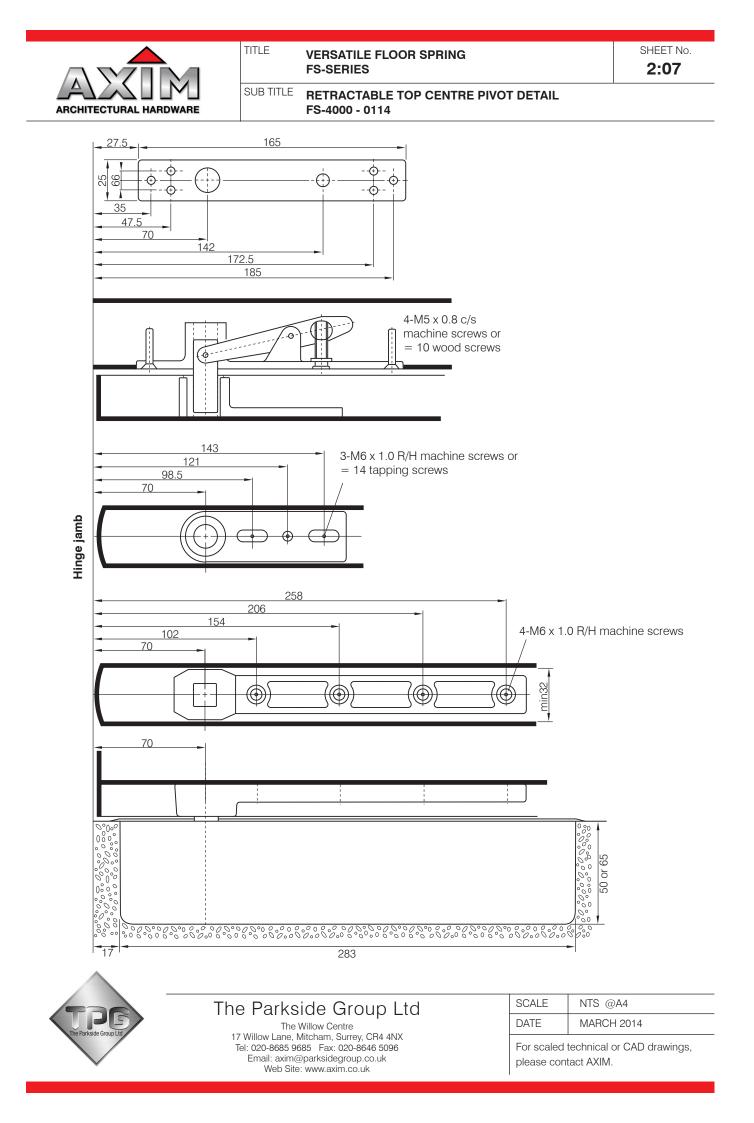



TITLE NARROW BODY FLOOR SPRING FS-6000 SERIES

SUB TITLE **TECHNICAL INFORMATION**

UNIVERSAL APPLICATION

Left hand, right hand, single and double action doors. Closing force 28 Nm for doors 150kg and up to 1200mm wide. No hold and 90° hold open options.

FULLY HYDRAULIC CONTROL

Provided by two valve screws Back check range 180°-70° Closing Range 70°-15° Latching Range 15°-0°

BACKCHECK ZONE

Prevents damage to outward opening doors or where door swing is limited to 90°.

ADJUSTMENT

With zinc plated cement box length 6mm, width 6mm, height 4mm.

SPINDLE INSERT EXTENSIONS

Up to 50mm, suitable for all types of doors.

SPECIAL ORDER OPTIONS


Hold open 85°, 105° and 120° Light spring 15 Nm (for narrow width and light doors).

SIZE SELECTION CHART


| DOOR WIDTH | SPRING | CLOSING | NO HOLD OPEN | HOLD OPEN 90° |
|-------------|----------|----------------------|--------------|---------------|
| in mm | STRENGTH | FORCE in Nm (Kpm) | PRODUCT CODE | |
| 800 to 1200 | Medium | 28 (2.8) | 6002-00 | 6002-90 |

Select medium spring for standard doors up to 1200mm wide up to 150kg. Light spring for light or narrow internal doors.

ADJUSTMENT



- = Mounting screws (back end) А
- B C
- Height adjustment screws (back end)
 Regulating valve for closing speed from 180° to 70°
 Regulating valve for closing speed from 70° to 0° D
- = Height adjustment screws (front end)
- E F = Mounting screws (front end)
 G = Back-spindle dimension.

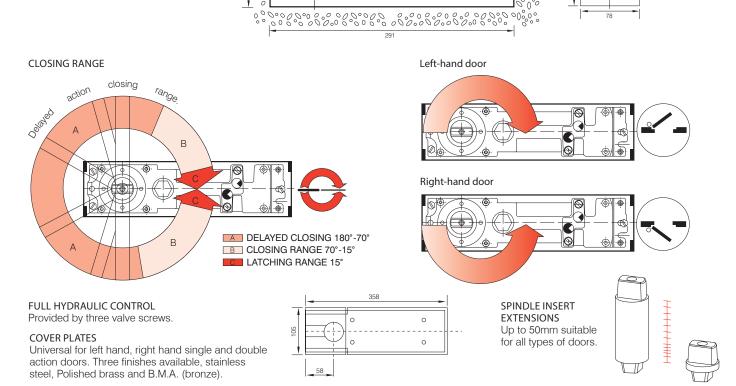

GUARANTEE

AXIM FLOOR SPRINGS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE







TITLE NARROW BODY FLOOR SPRING FS-6000 SERIES



SUB TITLE INSTALLATION INSTRUCTION



- A = Mounting screws (back end)
- B = Height adjustment screws (back end)
- C = Regulating valve for closing speed from 180° to 70°
- D = Regulating valve for closing speed from 70° to 0°
- E = Height adjustment screws (front end)
- F = Mounting screws (front end)
- G = Back-spindle dimension.

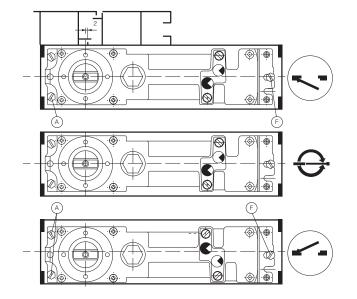

Left-hand door

Loosen mounting screws (A) and (E) Move closer in cement case as shown.

Double action door

Floor spring should be adjusted to centre of cement case.

Right-hand door


Loosen mounting screws (A) and (E)Move closer in cement case as shown.

Installation

The back-spindle dimension \bigcirc is 51mm and must be taken into consideration in regard to un-finished, or face concrete walls. After installation dimension \bigcirc can be reduced to 35mm by means of tiles, stucco or other wall finishings.

Removal

Loosen height adjustment screws B and remove mounting screws E. Now remove closer. Re-mounting: re-adjust closer. Tighten mounting screws E and height adjustment screw B.



8

-@

 \odot

Closing speed

The FS6000 has two closing speeds which are independently adjustable. Regulating valve \bigcirc controls the closing speed from $180^{\circ} \sim 70^{\circ}$. Regulating valve $\bigcirc D = 70^{\circ} \sim 0^{\circ}$ closed.



51mn

G


6


Accessories Installation drawings showing various accessories are available for all known aluminum-, stainless steel, toughened glass-, wood-, plastic- and steel doors.

The Parkside Group Ltd The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2017 |

| TITLE | NARROW BODY FLOOR SPRING FS-SERIES | SHEET No. 2:10 |
|-----------|---|-------------------|
| SUB TITLE | RETRACTABLE TOP CENTRE PIVOT DETAIL FS-6000-0114 | |

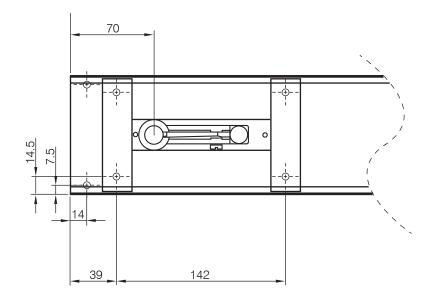

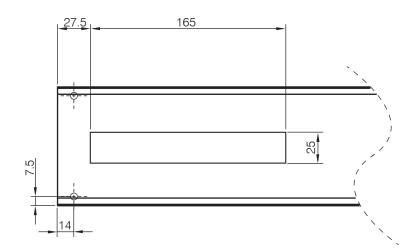

Blocks (by fabricator) drilled and tapped to suit top pivot







| TITLE | NARROW BODY FLOOR SPRING FS-SERIES | SHEET No. 2:11 |
|-----------|---|--------------------------|
| SUB TITLE | RETRACTABLE TOP CENTRE PIVOT DETAIL FS-6000-0115 | |





For anti finger trap doors with auto closers use AXIM TC8800 dummy transom closer with standard bottom pivot



AXIM FS-6000-0115



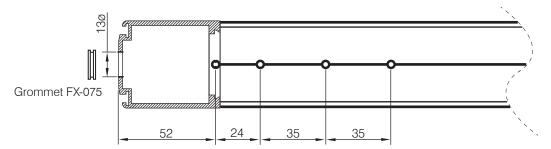

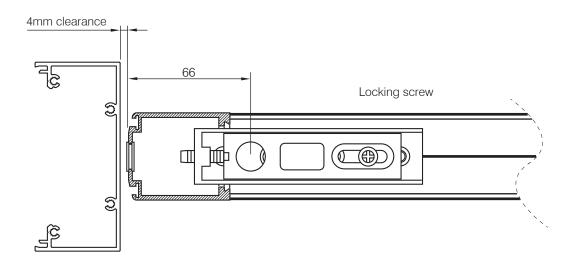



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



TITLE COMPACT BODY FLOOR SPRING FS-8500 SERIES

TECHNICAL INFORMATION

2:12

UNIVERSAL APPLICATION

Left hand, right hand, single and double action doors.

Closing force 28 Nm for doors 120kg and up to 1150mm wide. No hold and 90° hold open options.

105° hold open are available at request.

FULLY HYDRAULIC CONTROL

Provided by two valve screws Back check range 85°-130° Closing Range 130°-15° Latching Range 15°-0°

BACKCHECK ZONE

Prevents damage to outward opening doors or where door swing is limited to 90°.

FULLY ADJUSTABLE


The 8500 series floor spring is postionally adjustable for height 4mm, width 10mm and length 6mm.


SIZE SELECTION CHART

| DOOR WIDTH | SPRING | CLOSING | NO HOLD OPEN | HOLD OPEN 90° | |
|------------|----------|----------------------|--------------|---------------|--|
| in mm | STRENGTH | FORCE in Nm (Kpm) | PRODUCT CODE | | |
| Up to 1150 | Medium | 25 (2.5) | 8502-00 | 8502-90 | |
| Up to 800 | Light | 16 (1.6) | - | 8501-90 | |

Select medium spring for standard doors up to 1150mm wide up to 120kg. Light spring for light or narrow internal doors.

ADJUSTMENT

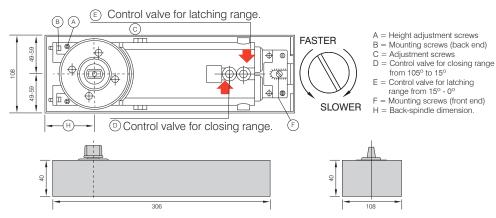

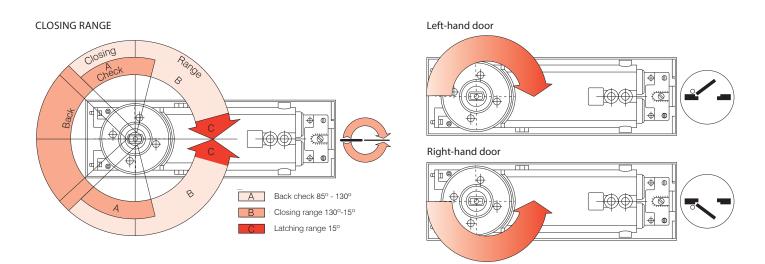

GUARANTEE

AXIM FLOOR SPRINGS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.






TITLE COMPACT BODY FLOOR SPRING FS-8500 SERIES

SUB TITLE

INSTALLATION AND ADJUSTMENT

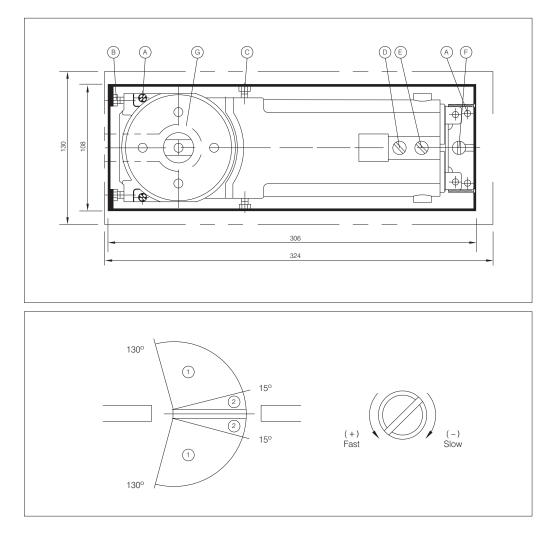

Installation & Adjustment

- (1) Prepare frame and door rails as detailed and install door strap and pivot set.
- (2) Cut out recess in floor large enough for cement case and fit floor spring in position. Ensure spindle aligns with pivot pin in frame. Take dust plate O fram equarplate pack and place over apindle before banging dear
- Take dust plate (G) from coverplate pack and place over spindle before hanging door.
- (3) Lift door onto floor spring and open door enough to reveal pivot pin retracting screw.
- (4) Turn screw counter-clockwise until pin fully engages with pivot in door.
- (5) To adjust the clearance between hinge jamb and door stile, loosen screws (F), (C) and adjust with screws (B).
- (6) To adjust door height, loosen screws (F), (C), (B) and adjust with screws (A).
- (7) To centre door, loosen screws (B), (F), and adjust with screws (C).
- (8) To adjust the speed from $105^{\circ} \sim 15^{\circ}$ turn value screw D counter-clockwise for faster and clockwise for slower.
- (9) For the last 15° of latching turn valve screw (E) counter-clockwise for faster and clockwise for slower.
- (10) Fit coverplate with 3 screws.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE NTS @A4 DATE MARCH 2014





SUB TITLE INSTALLATION AND ADJUSTMENT

950

- One model, four optional spring strengths for every \bigcirc application
- Ο Multiple functions as standard for reduced inventory
- Ο Non-handed, for single or double action door
- Ο Changeable spindle inserts available to suit field conditions
- Max. door weight up to 300kgs 0
- Hold-open angle available for 90° HO or NHO 0
- Mechanical Backcheck Ο
- Closing speed variable by adjustable valve Ο
- \bigcirc Max. door opening angle 180°

Technical Data

1 Closing speed adjustable

between 15°~0° angle

| _ | Spring | size | 3 | 4 | 5 |
|---|------------------|------|-----------|----------|-----------|
| | Closing Force | Nm | 15 | 34 | 44 |
| | Door V (mn | | Up to 800 | 800~1200 | 1200~1400 |

Cement box : 341x78x60 mm

(forward or backward total) : 6 mm

3 3

Hold Open

Hold-open: Available for 90°, 105° or no hold open, Without hold open, the max door opening can be 180°.

Backcheck

51


ø

0

B

36-42,36-42

The backcheck helps to prevent damage of the door and wall when a door is opened with excessive force by people or the wind.

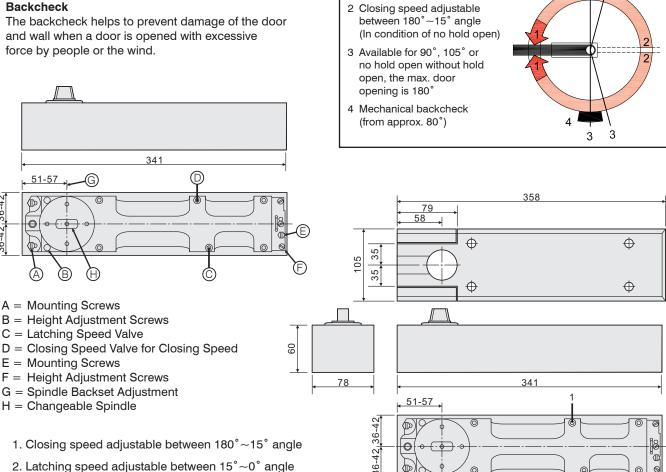

0

- 1. Closing speed adjustable between 180°~15° angle
- 2. Latching speed adjustable between 15°~0° angle

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE NTS @A4 DATE JULY 2017

ď

6 ര

For scaled technical or CAD drawings, please contact AXIM.


Universal Application, Multi-Function Floor Hinge.




TITLE COMPACT BODY FLOOR SPRING FS-9500 SERIES

SHEET No. 2:15

SUB TITLE INSTALLATION AND ADJUSTMENT

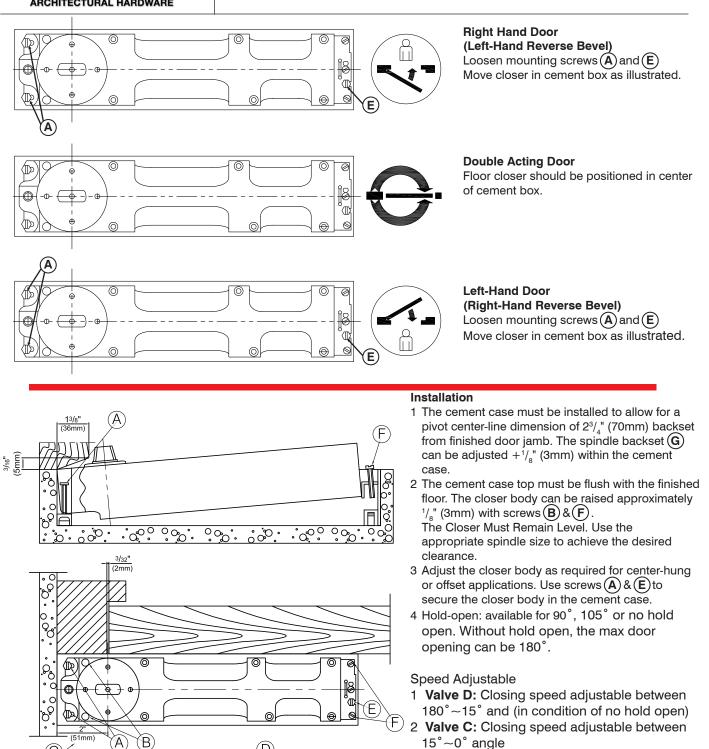



 $\widehat{\mathbb{C}}$

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX

Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk

Web Site: www.axim.co.uk

SCALE NTS @A4 DATE JULY 2017



Regular Cleaning and Maintenance:

Keep the floor spring and the surrounding area clean from dust, dirt, and debris. Clean cover plates with a mild detergent, rinse off after cleaning. This will prevent particles from interfering with the spring's mechanism.

TITLE

If floor spring is exposed to any moisture ensure cover cap is sealed with low modulus silicone to prevent entry to closer box.


Examine the seals around the floor spring for damage or wear. Damaged seals can allow dirt and moisture to enter, leading to premature wear and tear.

Regularly inspect and tighten any screws or bolts that may have loosened over time. Loose fasteners can affect the performance of the floor spring.

Periodically check the adjustment settings of the floor spring, including the closing speed and force. Follow instructions to make any necessary adjustments.

Visually inspect the floor spring and the area around it for any signs of damage, excessive wear, or rust. Address any issues promptly to prevent further damage.

Schedule Professional Maintenance:

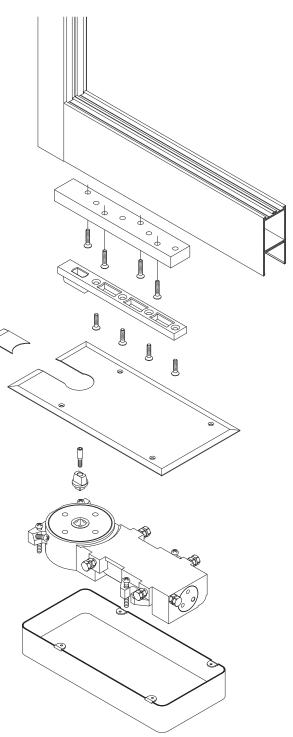



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | NOVEMBER 2023 |



SUB TITLE TECHNICAL INFORMATION

SURFACE MOUNTED HYDRAULIC DOOR CLOSER

Die cast aluminium body, modern slimline design suitable for doors opening onto adjacent walls. Available in two strengths with one body size suitable for single action doors, either right hand or left hand opening 90° and 180°.

Reversible for standard top jamb and parallel arm installations.

Parallel arm bracket supplied as standard with every unit.

Fixings provided for both timber and metal doors.

Anodised dress plates conceal fixings after installation.

Easy to follow installation guide and full size template packed with every unit.

ADJUSTMENT

Two valve screws provide full hydraulic control from 180° - 15° of closing and 15° - 0° latching.

FIRE RATING

AXIM 1000 series closers have been included in successful fire tests to BS 476 Pt. 22 1987.

AVAILABLE IN THREE FINISHES Silver.

Dark bronze. Gold. Other colours available on special request.

MODEL SELECTION TABLE (MAXIMUM DOOR WIDTH DIMENSION IN mm)

TITLE

| | | REGUL | AR ARM | | PARALLEL ARM | | | | DOOR |
|----------|----------|-----------|----------|-----------------------|--------------|-----------|----------|---------------------|------------------|
| SIZE NO. | INTERIOR | EXTERIC | RDOOR | Closing | INTERIOR | EXTERIC | RDOOR | Closing | WEIGHT (Ref.) |
| | DOOR | Swing Out | Swing In | - Force Nm (kgf.m) | | Swing Out | Swing In | Force Nm (kgf.m) | kgs |
| 2 | 900 | 800 | 700 | 19 (1.9) | 800 | 700 | 600 | 14 (1.4) | 25-45 |
| 3 | 1050 | 900 | 800 | 23 (2.3) | 900 | 800 | 700 | 19 (1.9) | 40-60 |

ACCESSORIES

Hold open arm (plunger type) adjustable for any degree of retention.

Flat top bracket for installation on door frame when direct fixing is not possible.

SPECIAL ORDER OPTIONS

Special purpose accessories are available to cover the most difficult of applications.

Further information on request.

GUARANTEE

AXIM SURFACE MOUNTED CLOSERS AND ACCESSORIES ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

| ARCHITECTURAL HARDWARE | TITLE | UNIVERSAL CLOSER FC-1000 SERIES | SHEET No. 3:02 |
|------------------------|-----------|--|--------------------------|
| | SUB TITLE | SURFACE MOUNTED CLOSER DROP PLATES FC1000-12-AL AND FC-1000-14-AL | · |



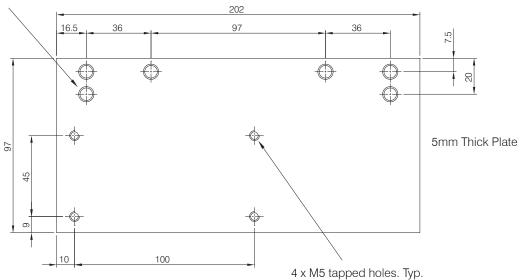

FC-1000-12-AL Backplate for use with FC1000 series surface closers on parallel arm installation

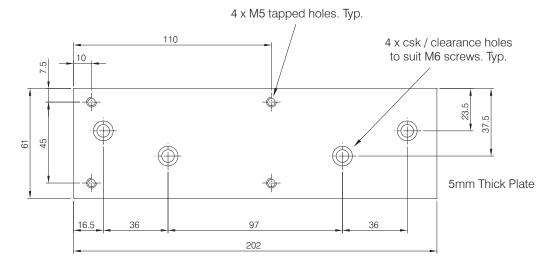

FC-1000-14-AL Backplate for use with FC1000 series surface closers on standard and top jamb installation




The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2023 |


| | TITLE | UNIVERSAL CLOSER | SHEET No. |
|------------------------|-----------|--|--------------|
| | | FC-1000 SERIES | 3:03 |
| | SUB TITLE | SURFACE MOUNTED CLOSER MOUNTING BRACKET | |
| ARCHITECTURAL HARDWARE | | FOR PARALLEL ARM INSTALLATION (FACE FIXED) FOR | C-1000-15-AL |



Material: Mild steel Finish: Zinc plating + silver, bronze or white PPC











The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

| | TITLE | UNIVERSAL CLOSER | SHEET No. |
|------------------------|-----------|---|--------------|
| | | FC-1000 SERIES | 3:04 |
| | SUB TITLE | SURFACE MOUNTED CLOSER PACKING BLOCK | |
| ARCHITECTURAL HARDWARE | | FOR PARALLEL ARM INSTALLATION (VERT. FIXED) FOR | C-1000-16-AL |





ISO view not to scale

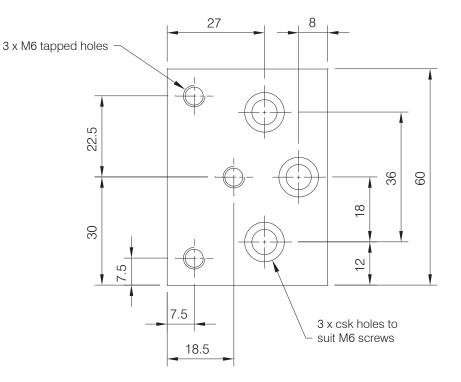



Material: Aluminium Finish: Mill finish



UNIVERSAL CLOSER FC-1000 SERIES


TITLE

SHEET No. 3:05

SUB TITLE INSTALLATION INSTRUCTIONS






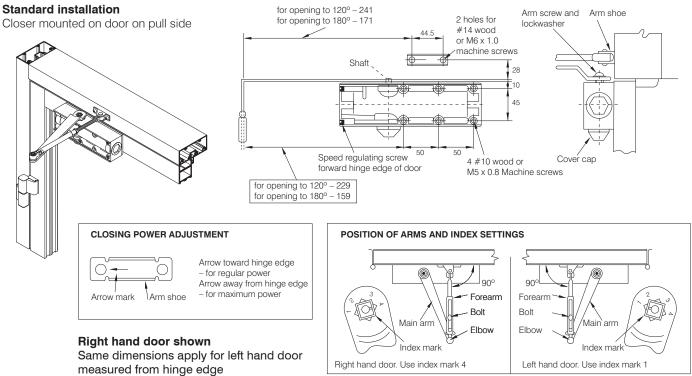

Top jamb installation

Closer mounted on top jamb on push side of door. Reveals of 70 to 127 requires long top jamb forearms

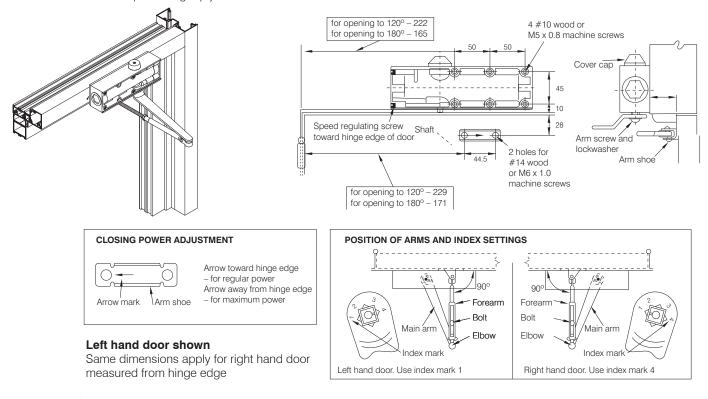





UNIVERSAL CLOSER FC-1000 SERIES

TITLE


SUB TITLE INSTALLATION INSTRUCTIONS


Parallel arm installation


Closer mounted on door on push side




Same dimensions apply for right hand door measured from hinge edge.











POSITION OF ARMS AND INDEX SETTINGS





Instructions

Step 1

- A. Check hand of door.
- B. Select type of installation.

Step 2

- A. See instructions for installation you have selected.
- B. Follow instructions for correct application and adjustment.

Step 3

- A. Apply closer body and forearm (or parallel bracket and forearm) to door and frame as shown.
- B. Place main arm on shaft at proper index mark as shown and tighten arm screw with lockwasher securely.
- C. Adjust length of forearm as shown and attach to main arm at elbow and tighten locknut bolt.

Step 4

Fixing cover cap on shaft at unused side and insert rubber plug into one of unused fixing hole on body then slide in the Faceplate.

Step 5

Door closing and latching speeds are controlled by #1, #2 speed. regulating screw separately.

- A. Clockwise turns slow the Speed.
- B. Counterclockwise turns increase the speed.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



MULTI-STRENGTH CLOSER FC-1500 SERIES

SUB TITLE **TECHNICAL INFORMATION**

(A) Regular Opening

R

C

SURFACE MOUNTED HYDRAULIC DOOR CLOSER

The FC-15 is a multi-strength surface mounted hydraulic door closer, designed to complement the FC-10. A hardened rack and pinion mechanism is house in a die cast aluminium body.

Suitable for left or right hand opening doors, top jamb and standard fixing. A parallel bracket is supplied for parallel arm installations.

Fixings for both metal and timber doors are included

Adjustment valve screws and fixings are concealed behind a slide on, anodised dress plate. Each unit is complete with a full size template and easy

ADJUSTMENT

TITLE

Backcheck is a standard feature which protects doors in severe conditions

The cushioning effect has been set for average conditions but can be increased or decreased by turning (valve screw D) clockwise or counterclockwise.

Closing speed is adjustable from 180-15° by turning (valve screw B) counterclockwise for faster or clockwise for slower

The latching (valve screw C) can be adjusted in the same way for the last 15° of closing.


DELAYED ACTION

Delayed action is available as an option giving a timed hold open from 180-70° allowing unhindered access, particularly useful on hospital doors. The speed is also adjustable using (valve screw E) in the same way as the closing and latching valves. Spring power is adjustable giving sizes 2-5 by tuning (screw F) with the 5mm hexagon wrench provided. See adjustment chart.

TEST VERIFICATION OF CONFORMITY

AXIM 1500 series closers have been included in successful tests to EN 1154: 1996.

AVAILABLE IN THREE FINISHES

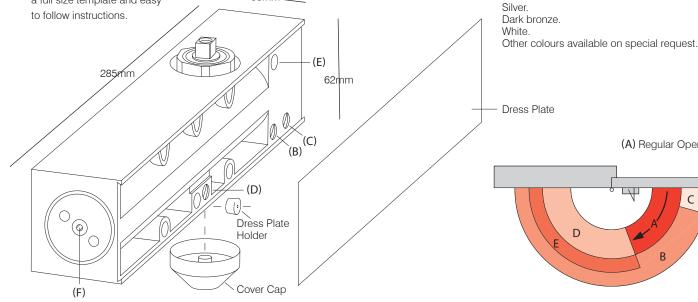

53mm

| | (F) | | | 0010 | oup | | | | | | |
|--------|------------|-------|--------------------------------|---------------|-------------------------|------------------|-------|-----------------------|--------------------------|----------|------------------|
| | | | STANDARD/TOP JAMB INSTALLATION | | | | | PARALLEL INSTALLATION | | | |
| No. of | | Power | aina Interior | Exterior door | loor width (mm) Closing | | Power | Interior | Exterior door width (mm) | | Closing |
| | turned siz | size | door width (mm) | Swing out | Swing in | force (Kgf.m) | size | door width (mm) | Swing out | Swing in | force (Kgf.m) |
| | -3 | 2 | 900 | 800 | 700 | 1.2 | 1 | 900 | 800 | 600 | 1.2 |
| | 0 | 3 | 1050 | 900 | 800 | 1.9 | 2 | 1050 | 700 | 700 | 1.9 |
| | +4 | 4 | 1200 | 1050 | 900 | 2.9 | 3 | 1200 | 900 | 800 | 2.9 |
| | +8 | 5 | 1350 | 1200 | 1050 | 3.8 | 4 | 1350 | 1200 | 1050 | 3.8 |

*Factory preset

ACCESSORIES

Hold open arm (plunger type) adjustable for any degree of retention.

Flat top bracket for installation on door frame when direct fixing is not possible.

SPECIAL ORDER OPTIONS

Special purpose accessories are available to cover the most difficult of applications.

For special widths, a FC-1600 closer is available.

Please contact Technical Department for further information.

GUARANTEE

AXIM SURFACE MOUNTED CLOSERS AND ACCESSORIES ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |




TITLE MULTI-STRENGTH CLOSER FC-1500 SERIES

SUB TITLE STANDARD INSTALLATION

POSITION OF ARMS AND INDEX SETTINGS



Right hand door. Use index mark 4



Left hand door. Use index mark 1

Opening angles/dimensions

Dimensions taken from C/L of hinge

| | 'A' | 'B' |
|------|-----|-----|
| 120° | 300 | 280 |
| 180° | 254 | 234 |



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |




TITLE **MULTI-STRENGTH CLOSER** FC-1500 SERIES


SUB TITLE **TOP JAMB INSTALLATION**

POSITION OF ARMS AND INDEX SETTINGS

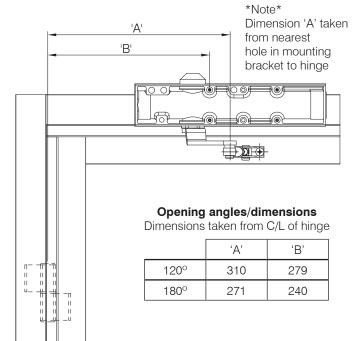




Left hand door. Use index mark 1



Right hand door. Use index mark 4

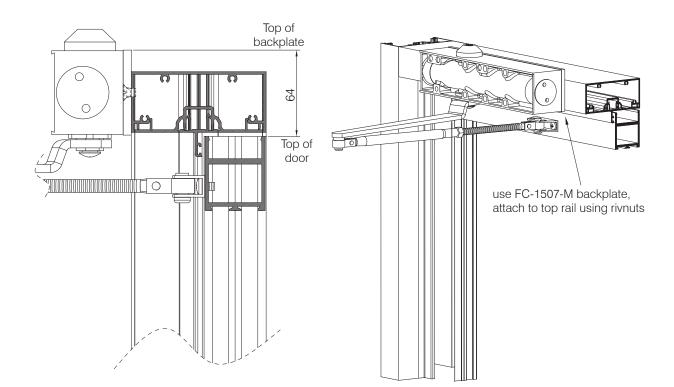



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



TITLE MULTI-STRENGTH CLOSER FC-1500 SERIES

SUB TITLE PARALLEL ARM INSTALLATION

POSITION OF ARMS AND INDEX SETTINGS 'A ' 'B' 0 $\bigcirc)$ Main Arm Index Mark Forearm θ θ Left hand door, 0 use index mark 3 Illustration 'A' **Opening angles/dimensions** Π. Dimensions taken from C/L of hinge Ш Ш 0 Main Arm || ||__ ∦ 'A' 'B' Index Mark 120° 228 189 Forearm 180° 193 154 Right hand door, use index mark 2 Illustration 'B' **m** Top of door ß 32. Ш Top of backplate Use modified drop plate as shown overleaf. Attach \bigcirc to top rail using rivnuts. SCALE NTS @A4 The Parkside Group Ltd DATE MARCH 2014 The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX For scaled technical or CAD drawings, Tel: 020-8685 9685 Fax: 020-8646 5096


Email: axim@parksidegroup.co.uk

Web Site: www.axim.co.uk

please contact AXIM.




SUB TITLE DROP PLATES FC1507-AL AND FC-1507-AL-MOD

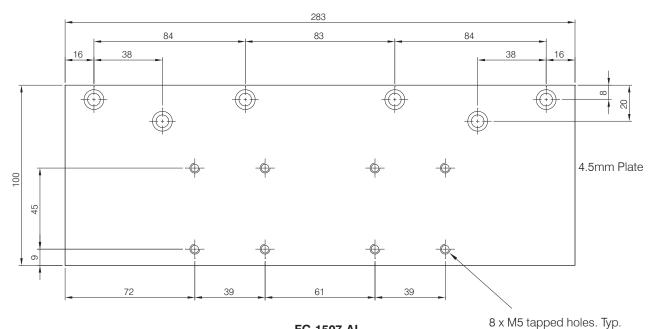

FC-1507-AL Backplate for use with FC1500 series surface closers on parallel arm installation



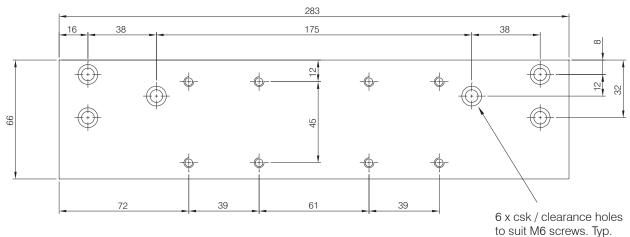

FC-1507-AL-MOD Backplate for use with FC1500 series surface closers on standard and top jamb installation



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2023 |





TITLE MULTI-STRENGTH CLOSER FC-1500 SERIES


SUB TITLE MOUNTING BRACKET FOR PARALLEL ARM INSTALLATION (FACE FIXED) FC-1500-15-AL







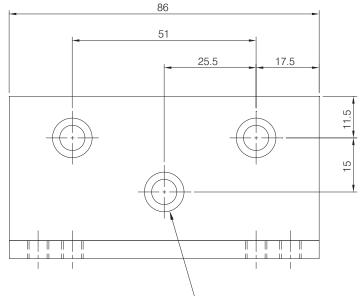






The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |


| $\wedge \wedge \rangle \sim \langle \rangle \wedge \langle \rangle \wedge \langle \rangle$ |
|--|
| |
| |
| ARCHITECTURAL HARDWARE |
| |


| TITLE | MULTI-STRENGTH CLOSER FC-1500 SERIES | SHEET No. 3:13 |
|-----------|--|-------------------|
| SUB TITLE | PACKING BLOCK FOR PARALLEL ARM INSTALLATION (VERT. FIXED) FC-1500-16-AL | N |





ISO view not to scale

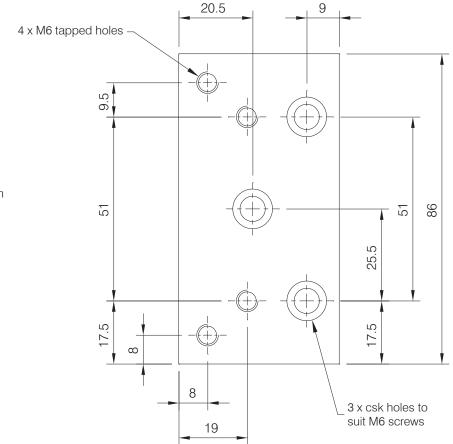






The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

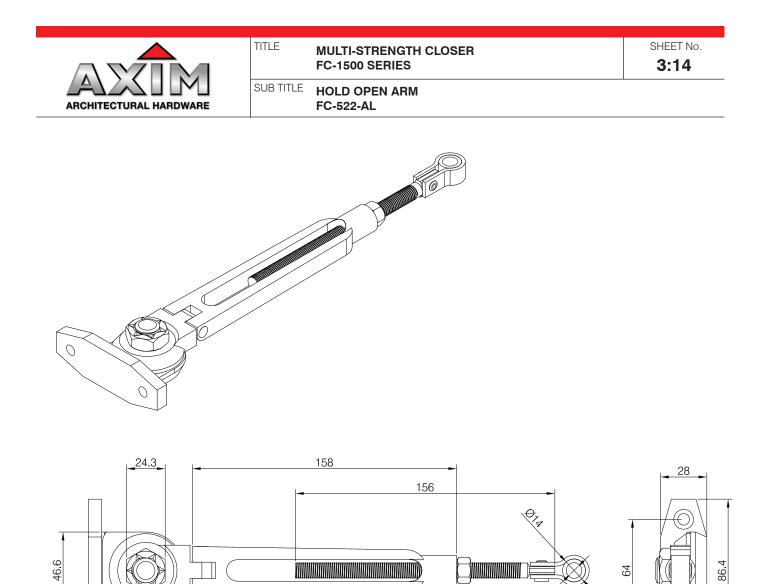

\$

ØĨ

15



220


 The Parkside Group Ltd
 SCALE
 NTS @A4

 DATE
 MAY 2018

 Tor scaled technical or CAD drawings, please contact AXIM.



| TITLE | MULTI-STRENGTH CLOSER FC-1500 SERIES | SHEET No. 3:15 |
|-----------|---|--------------------------|
| SUB TITLE | PARALLEL BRACKET FOR FC-522-AL HOLD OPEN AR | M - FC-526-AL |

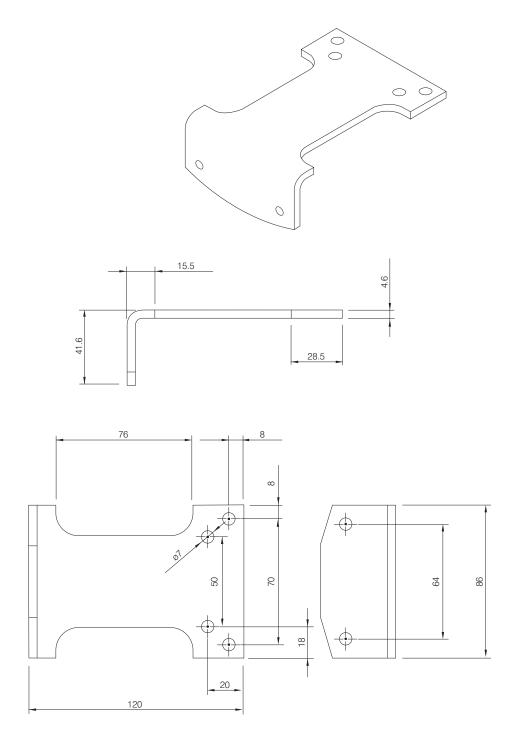



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |




TITLE MULTI-STRENGTH CLOSER FC-1500 SERIES


SUB TITLE TOP JAMB INSTALLATION

4 No. M6 x 25mm long stainless steel countersunk head screws & countersunk rivnuts





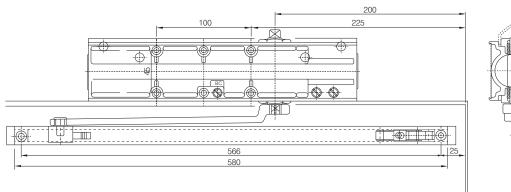




- Use dimension shown in above template to mark six holes on door for door closer and two holes for sliding channel.
- (2) Drill holes in door for 4 #10 wood screw or drill and tape for 4--M5 x 0.8 (10 x 24) machine screw.
- (3) Drill holes in frame for 2 #10 wood screw or drill and tape for 2--M5 x 0.8 (10 x 24) machine screw.
- (4) Mount closer and sliding channel, place arm on shaft about 55° from parallel position (as drawing), force arm to parallel position and use (5) screw to attached arm & (4) sliding block.

- (5) Open door to desire degree and move the hold open device to be in touch with the sliding block. Tighten the (2) adjustment screw.
- (6) For adjusting hold-open force, pls adjust the ③ nut -- clockwise for increasing force & counterclockwise for decreasing. (③ nut can't be adjusted over 2 turns.)

Note: If hold open function is not necessary, please don't install the 'hold open device' into channel.






The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



SUB TITLE PARALLEL INSTALLATION

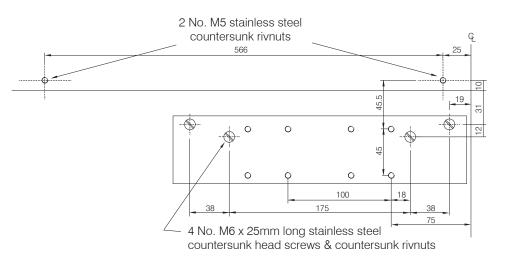


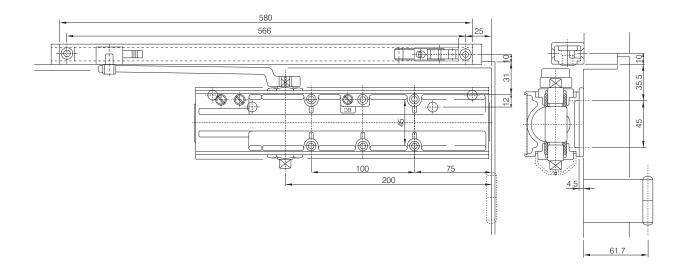

- Use dimension shown in above template to mark six holes on door for door closer and two holes for sliding channel.
- (2) Drill holes in door for 4 #10 wood screw or drill and tape for 4--M5 x 0.8 (10 x 24) machine screw.
- (3) Drill holes in frame for 2 #10 wood screw or drill and tape for 2--M5 x 0.8 (10 x 24) machine screw.
- (4) Mount closer and sliding channel, place arm on shaft about 55° from parallel position (as drawing), force arm to parallel position and use (5) screw to attached arm & (4) sliding block.

- (5) Open door to desire degree and move the hold open device to be in touch with the sliding block. Tighten the (2) adjustment screw.
- (6) For adjusting hold-open force, pls adjust the ③ nut -- clockwise for increasing force & counterclockwise for decreasing. (③ nut can't be adjusted over 2 turns.)

Note: If hold open function is not necessary, please don't install the 'hold open device' into channel.





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



SUB TITLE TECHNICAL INFORMATION


TITLE

UNIVERSAL SURFACE MOUNTED DOOR CLOSER


Reversible for left or right hand doors. Die-cast aluminium housing with a hardened steel rack and pinion mechanism. One size unit for two strengths, 2 & 3. For strengths 1, 4 & 5 the compatible 2000 series is recommended.

ADJUSTMENT

Two independent valves providing hydraulic control from 180° of closing sweep and 15° of latching. Fully adjustable after installation.

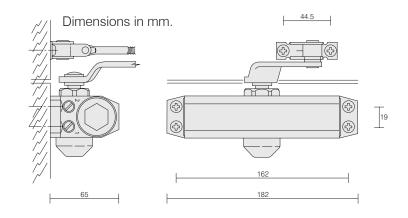

CLOSING RANGE AND ADJUSTMENT



MODEL SELECTION TABLE (MAXIMUM DOOR WIDTH DIMENSION IN mm)

| SIZE | 105° OPENING ANGLE | | Closing | 185° OPENING ANGLE | | Closing |
|------|--------------------|---------------|---------------------|--------------------|---------------|---------------------|
| NO. | INTERIOR DOOR | EXTERIOR DOOR | Force Nm (kgm.f) | INTERIOR DOOR | EXTERIOR DOOR | Force Nm (kgm.f) |
| 2 | 900 | 750 | 19 (1.9) | 750 | 600 | 14 (1.4) |
| 3 | 1050 | 900 | 23 (2.3) | 900 | 750 | 19 (1.9) |

GUARANTEE

AXIM SURFACE MOUNTED CLOSERS AND ACCESSORIES ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |




TITLE **BUDGET / CONTRACT CLOSER** FC-3000 SERIES

SUB TITLE INSTALLATION INSTRUCTIONS

Standard installation

Closer mounted on door pull side

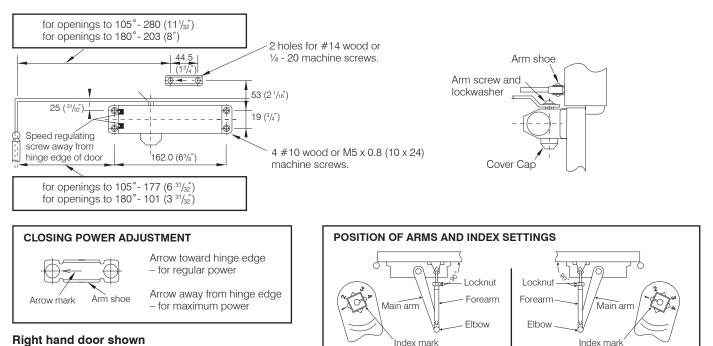


Right hand door. Use index mark 4

Same dimensions apply for left hand door measured from hinge edge.

Top jamb installation

Closer mounted on top jamb on push side of door. Reveals of 70 (2 ¾") to 127 (5") requires long top jamb forearms.

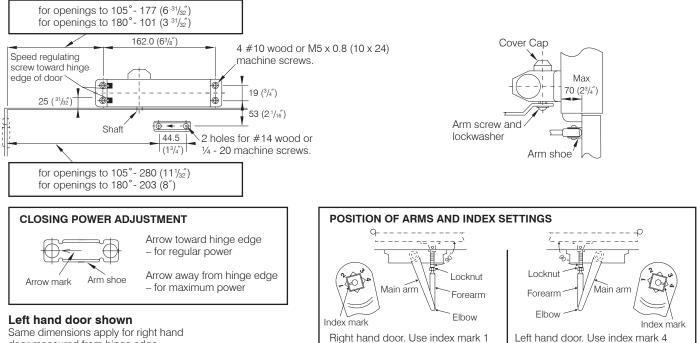

Web Site: www.axim.co.uk

Same dimensions apply for right hand door measured from hinge edge.

> SCALE NTS @A4 DATE JULY 2020

The Parkside Group Ltd The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk

For scaled technical or CAD drawings, please contact AXIM.

Left hand door. Use index mark 4


Left hand door. Use index mark 1





TITLE **BUDGET / CONTRACT CLOSER** FC-3000 SERIES

SUB TITLE INSTALLATION INSTRUCTIONS

Parallel arm installation




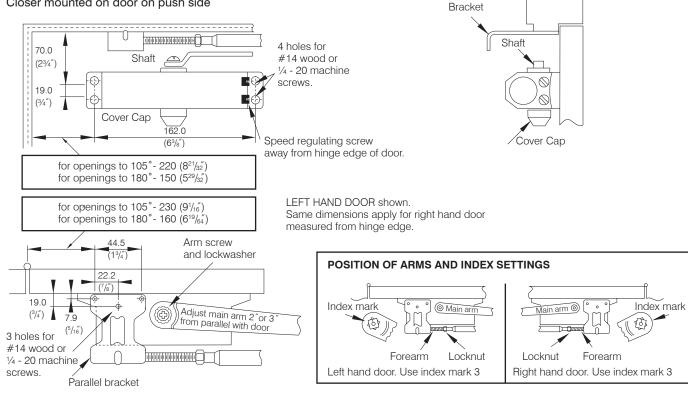





Closing Speed Regulating Screw Latching Speed Regulating Screw



Instructions

Parallel

Step 1

A. Check hand of door.

B. Select type of installation.

Step 2

A. See instructions for installation you have selected.

B. Follow instructions for correct application and adjustment.

Step 3

A. Apply closer body and forearm (or parallel bracket and forearm) to door and frame as shown. B. Place main arm on shaft at proper index mark as shown and tighten arm screw with lockwasher securely. C. Adjust length of forearm as shown and attach to main arm at elbow and tighten locknut.

Step 4

Snap cover cap over shaft at unused side.

Step 5

Door closing and latching speeds are controlled by #1, #2 speed.

Regulating screw separately.

A. Clockwise turns slow the speed.

B. Counterclockwise turns increase the speed.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2020 |



| TITLE | BUDGET / CONTRACT CLOSER |
|-------|--------------------------|
| | FC-3000 SERIES |

SHEET No. 3:21

SUB TITLE INTENTIONALLY BLANK





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



| TITLE | BUDGET / CONTRACT CLOSER |
|-------|---------------------------------|
| | FC-3000 SERIES |

SHEET No. 3:22

SUB TITLE INTENTIONALLY BLANK





The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |



TITLE CONCEALED ROD CRASH BAR PR-7085 SERIES EXIT DEVICE

SUB TITLE TECHNICAL INFORMATION PR-7085

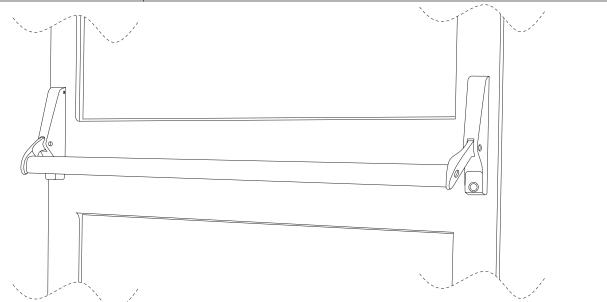

CONCEALED ROD, PANIC EXIT DEVICE

Heavy duty lever springs for durable operation of lever arms.

Internal mechanism manufactured from stainless and plated steel.

8.5mm Diameter steel operating rods 16mm bolt throw.

Bolt length adjustable ensuring correct alignment.

Standard model suitable for doors 2135mm high x 1155mm wide.

300mm and 600mm coupling rods available for tall doors and 1220mm long crossbars for extra wide doors. Cross bars can be cut to suit exact width requirements.

Available with standard mortice rim cylinder, handle and mounting pad allowing operation from outside.

Permanent latch retention by either cylinder key from outside or concealed pins under levers. Anodised crossbars in:-

Silver Satin, Dark Bronze & Black.


Housings and lever arms stoved, abrasive resistant finish to match anodised finishes. Easy to follow instructions and full size templates supplied with every unit.

SUGGESTED SPECIFICATION

Concealed vertical rod panic exit devices shall be AXIM Series 7085.

Door shall be latched at top and bottom except during operation cycle or when held open using key or concealed dogging pin. Exit device housings shall not exceed 118 x 186mm projection.

All mounting screws shall be concealed. Heavy duty springs (to raise the crossbar) shall be used on each housing for durability.



ACCESSORIES

Rim cylinder for access from outside. (2 keys.) **Product Code:-**

RC-785-AL - 46mm DOOR STILE - Silver RC-785-AL-S - 46mm DOOR STILE - Silver RC-785-DU - 46mm DOOR STILE - Dark Bronze RC-785-BK - 46mm DOOR STILE - Black

Mounting pad for fixing rim cylinder.

Product codes:-MP-786-AL - 46mm DOOR STILE - Silver MP-786-DU - 46mm DOOR STILE - Dark Bronze MP-786-BK - 46mm DOOR STILE - Black MP-788-AL - 49mm DOOR STILE - Silver MP-790-AL - 54mm DOOR STILE - Silver MP-792-AL - 67mm DOOR STILE - Silver

Extension rod and coupler for tall doors. **Product Code:-**

RE-712 - 300mm EXTENSION RE-714 - 600mm EXTENSION RE-716 - 1000mm EXTENSION

Push bar, 1500mm, for wide doors, cut to suit. **Product codes:-**

CB-748-AL - 1219.2mm - CRASH BAR - Silver **CB-760-AL** - 1524mm - CRASH BAR - Silver Other finishes available to special order.

Dogging Pin DP-713

Locking handle LH-725-AL - 46mm DOOR STILE - Aluminium LH-725-BK - 46mm DOOR STILE - Black LH-730-AL - 49mm DOOR STILE - Aluminium LH-745-AL - 54mm DOOR STILE - Aluminium LH-745-AL - 67mm DOOR STILE - Aluminium

GUARANTEE

AXIM HANDLES ARE GUARANTEED FOR 12 MONTHS AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



TITLE CONCEALED ROD CRASH BAR PR-7085 SERIES EXIT DEVICE

SHEET No. 4:02

SUB TITLE ASSEMBLY DETAILS PR-7085

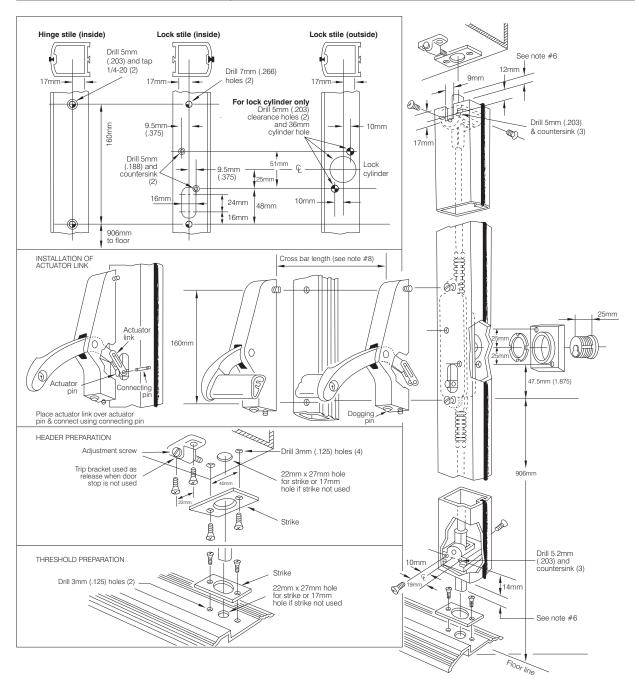

MOUNTING INSTRUCTIONS

- 1. Determine hand of door and prepare inside of lock and hinge stiles as show.
- If Cylinder Key Lock is to be used, prepare inside and outside of lock stile as shown.
- Insert Rod and Case Assembly into lock stile and secure with (2) 1/4-20 Shoulder Studs.
- If Key Lock is used, insert Cylinder in Mounting Pad and secure with Locking Ring. Install using (2) #8-32x49mm Flat Head Machine Screws.
- Position Exit Pad over stile and attach Actuator Link to Actuator Pin using Connecting Pin provided. Place on stile over 1/4-20 Shoulder Studs and tighten 3 Socket Head Set Screws to secure in place.
- Adjust length of top and bottom Latch Bolts by turning in or out. When the Panic Arm is fully depressed, the Latch Bolts

should be slightly recessed from flush with the top and bottom of the door. NOTE: Flat notch side of Bolt **must** face the outside of the door. Install top and bottom Latch Bolt Guides using (6) #10x13mm Flat Head Self-threading Screws.

- Install (2) 1/4-20 Shoulder Studs on hinge stile. Place other Exit Pad over Studs and tighten 3 Socket Head Set Screws to secure in place.
- 8. Measure distance from inside edge to inside edge of Exit pads for proper Cross Bar length. Cut Cross Bar. CAUTION: Cross Bar length must be within $\pm\,$ 1mm for unit to function properly.
- 9. Loosen 3 Set Screws on hinge stile Exit Pad and install Cross Bar using (2) 1/4-20x25mm Oval Head Self-threading Screws. Tighten 3 Set Screws to secure in place.
- Prepare header and threshold as shown. If Header and Threshold Strikes are required, install using (4) #8x25mm Flat Head All-purpose Screws.

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

DOGGING EXIT DEVICE USING DOGGING PIN:

Fully depress Cross Bar and hold, push up Dogging Pin with screwdriver and rotate 90° in either direction.

TO RELEASE EXIT DEVICE:

Hold Cross Bar down and rotate Dogging Pin with screwdriver in either direction until Dogging Pin releases.

DOGGING EXIT DEVICE USING CYLINDER KEY:

Fully depress Cross Bar and hold, turn Key clockwise approximately 60°, return Key to centre and remove.

TO RELEASE EXIT DEVICE:


Turn key counterclockwise 90°, return Key to centre and remove.

SCALENTS @A4DATEMARCH 2014






SUB TITLE ASSEMBLY DETAILS PR-7085

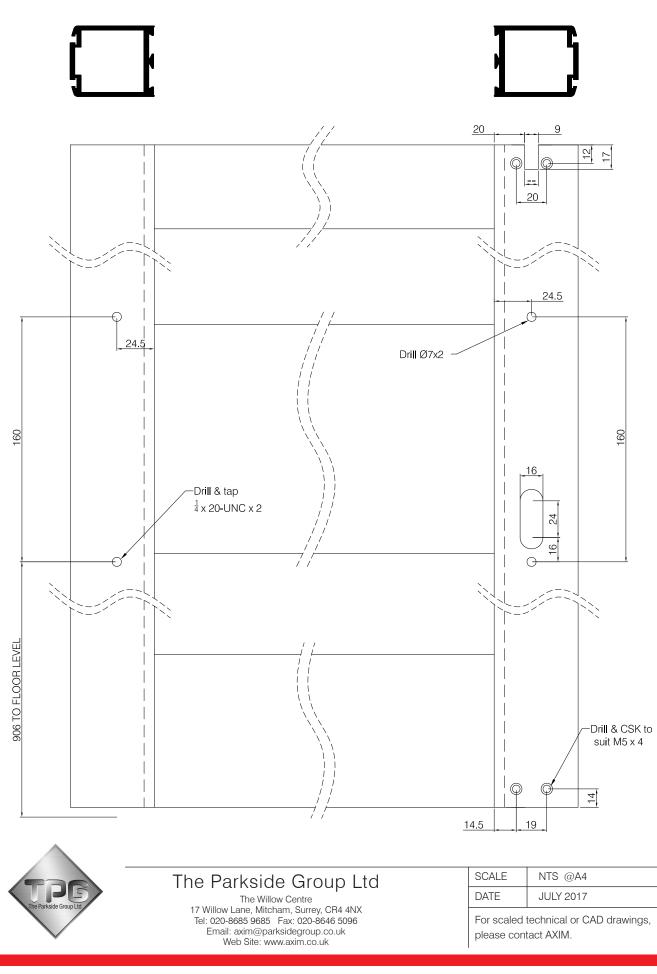




TITLE CONCEALED ROD CRASH BAR PR-7085 SERIES EXIT DEVICE SHEET No. **4:04**

SUB TITLE ASSEMBLY DETAILS PR-7085

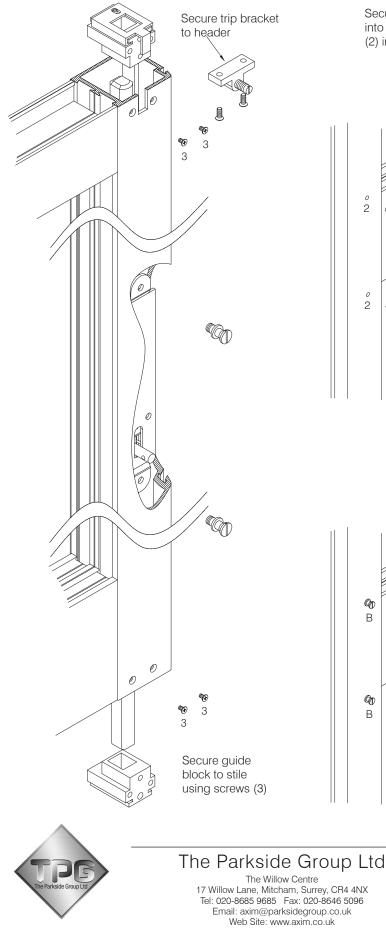


Secure fixing screws (1) thru stile into lock mechanism, and screws (2) into tapped holes in opposite stile.

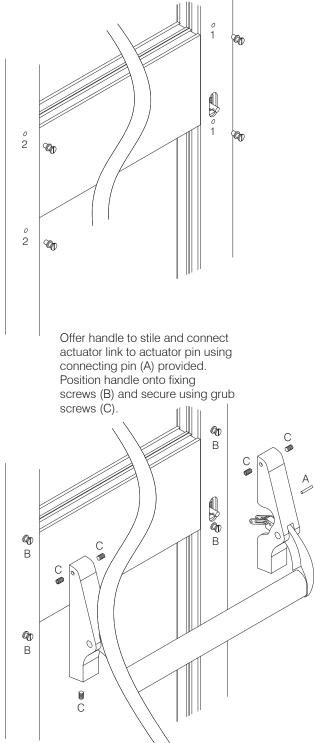


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |




SUB TITLE FITTING GUIDE FOR DOGGING PIN DP-713




1) Remove securing screw in back of handle unit



2) Once securing screw is removed existing pin should be ejected by internal spring



3) Replace existing pin with knurled pin (retaining original spring)




4) Replace securing screw holding knurled pin in far enough that notch on dogging pin can locate on securing screw



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

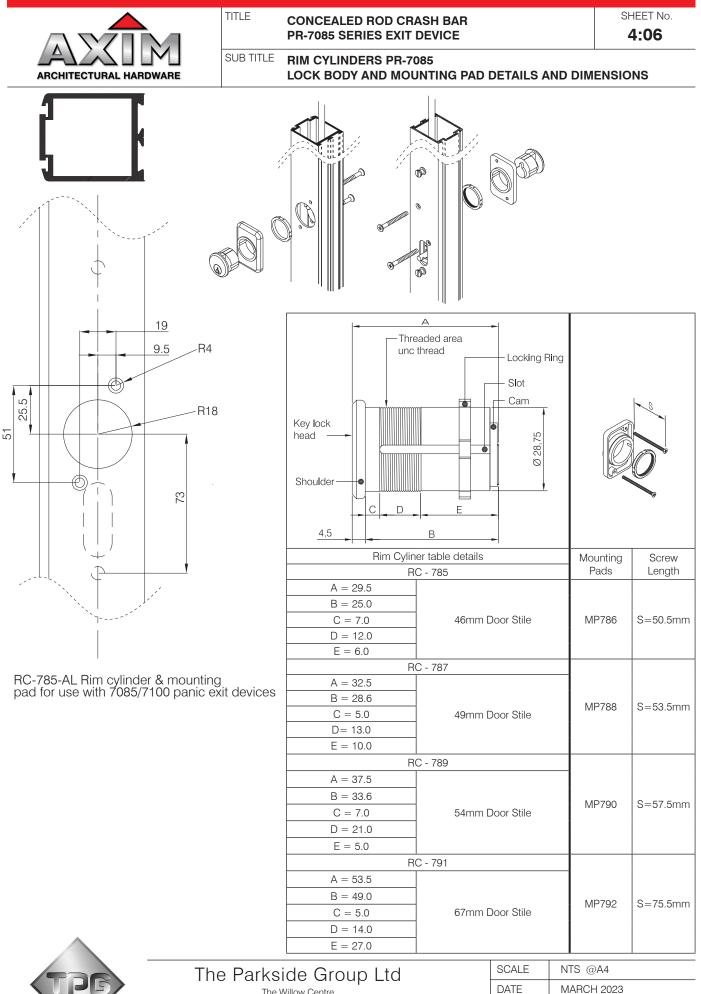

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk




TITLE CONCEALED ROD CRASH BAR PR-7085 SERIES EXIT DEVICE

SUB TITLE

KEY CONTROLLED OUTSIDE TRIM LOCKING HANDLE FOR

PR7085, PR7085P & PR7100 EXIT DEVICES

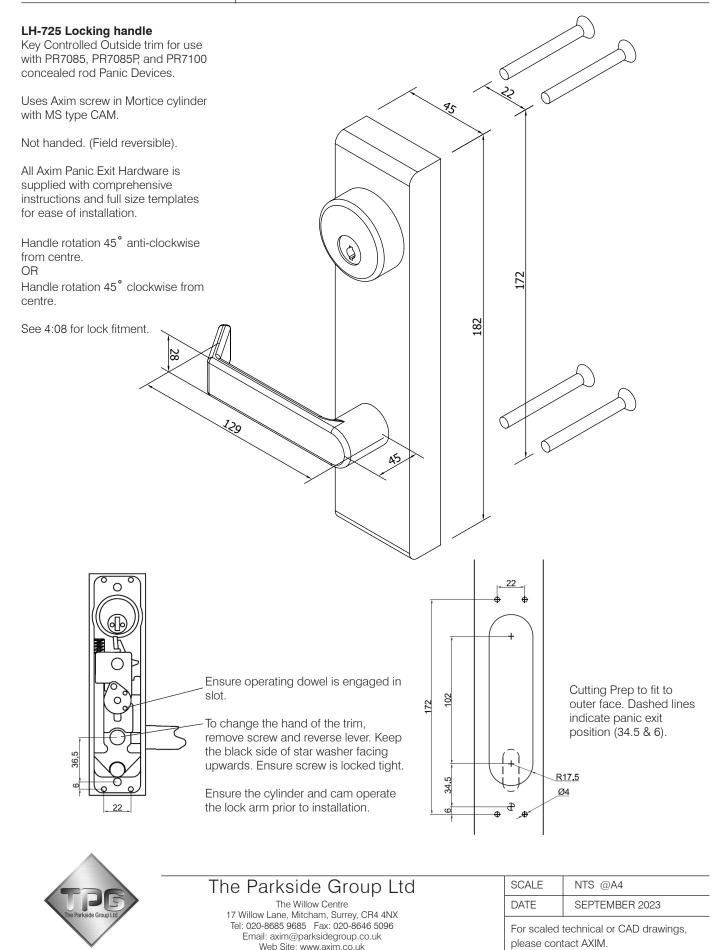




TITLE CONCEALED ROD CRASH BAR PR-7085 SERIES EXIT DEVICE

SHEET No.

4:08

SUB TITLE LOCKING HANDLES DETAILS AND DIMENSIONS LH-725 AND PR-7085 FABRICATION DETAIL

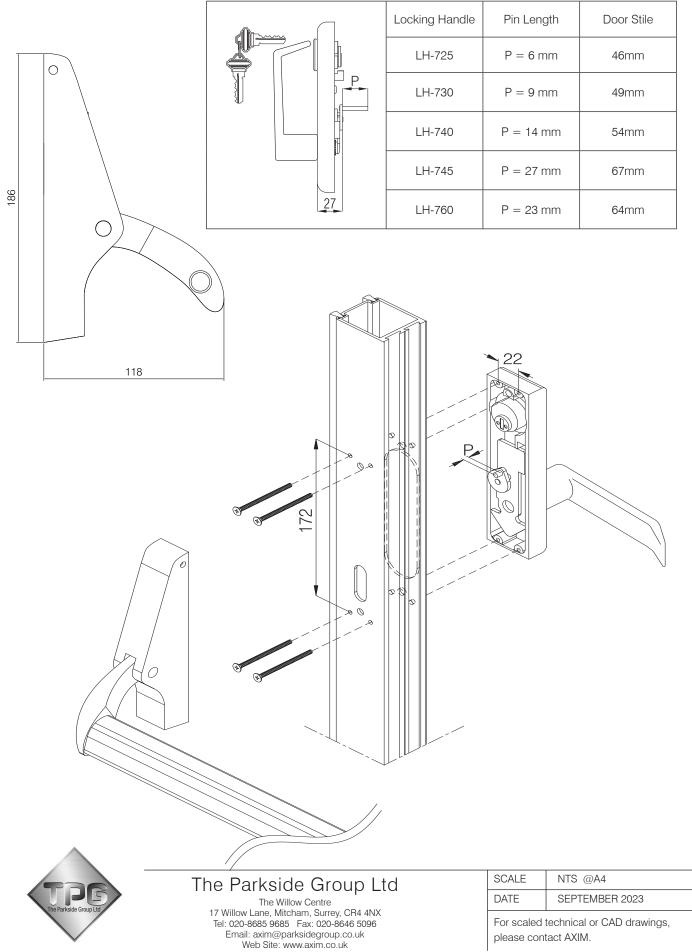




TITLE CONCEALED ROD PADDLE HANDLE PR-7085P SERIES EXIT DEVICE

SHEET No. **4:09**

SUB TITLE TECHNICAL INFORMATION



CONCEALED ROD, PANIC EXIT DEVICE

Heavy duty lever springs and internal mechanism for durable operation of lever and arm.

Plated steel and stainless steel components. 8.5mm diameter, steel locking rods with 16mm

bolt throw.

Bolt length adjustable ensuring correct alignment.

Standard model suitable for all widths of doors and 2135mm high. 300mm and 600mm coupling rods are available for taller doors.

Available with standard mortice rim cylinder, handle and mounting pad allowing external access.

Permanent bolt retention for easy access can be achieved with cylinder key or dogging pin to the underside of the operating lever.

All Axim panic exit hardware is supplied with comprehensive instructions and full size templates for ease of installation.

SUGGESTED SPECIFICATION

Concealed vertical rod panic exit devices with paddle handle fitted to inside face of door. Exit device to secure top and bottom of the door except during operation cycle or when rods are retracted with key or dogging pin.

Operating paddle handle and lever not to exceed 118mm x 186mm projection. All mounting screws to be concealed.

Handles and mechanisms will be fitted with heavy duty springs for durability. Ref; AXIM PR-7085P (hand as specified)

HAND OF DOOR

RHRB HANDLE OPTION SHOWN

> ACCESSORIES Extension rod with coupling for doors over 2135mm


high (plated steel) **Ref: RE-712** - 300mm Extension Rod **RE-714** - 600mm Extension Rod **RE-716** - 1000mm Extension Rod

Rim cylinder for access from outside RC-795-AL - 46mm TO 54mm DOOR STILE - Silver RC-795-AL-S - 46mm TO 54mm DOOR STILE - Silver RC-785-DU - 46mm DOOR STILE - Bronze RC-785-BK - 46mm DOOR STILE - Black RC-787-AL - 46mm DOOR STILE - Silver RC-789-AL - 54mm DOOR STILE - Silver RC-791-AL - 67mm DOOR STILE - Silver

Cylinder mounting pad for above including fixings **MP-786-AL** - 46mm DOOR STILE - Silver **MP-786-DU** - 46mm DOOR STILE - Bronze **MP-786-BK** - 46mm DOOR STILE - Black

Paddle handle housing unit PH-785-AL-LH - LEFT HAND - Silver PH-785-AL-RH - RIGHT HAND - Silver

Dogging pin **DP-713**



MATERIAL FINISH Lever Handles are

Lever Handles are satin chrome finish to complement most door colours and are clearly marked 'PUSH'.



LHRB

AXIM HANDLES ARE GUARANTEED FOR 12 MONTHS AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.

TPPG The Parkside Group Ltd

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |




TITLE CONCEALED ROD PADDLE HANDLE **PR-7085P SERIES EXIT DEVICE**

SHEET No.

4:10

SUB TITLE **TECHNICAL INFORMATION PR-7085P**

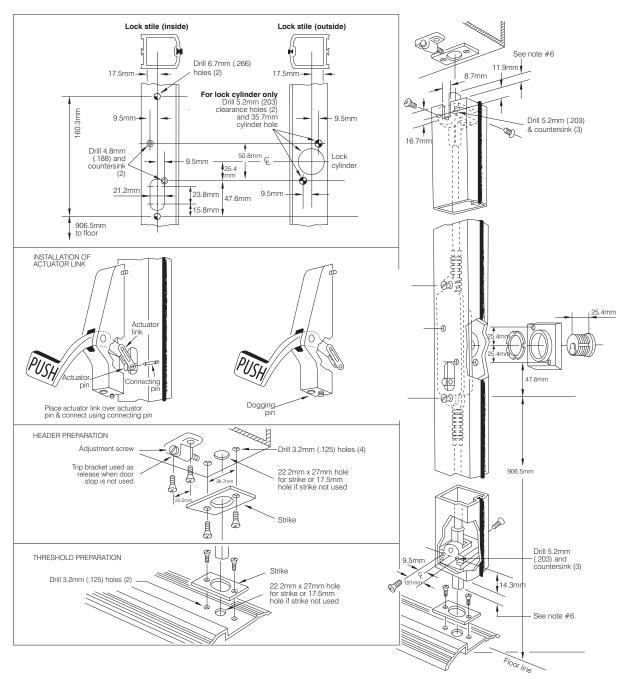

MOUNTING INSTRUCTIONS

- 1. Determine hand of door and prepare inside of lock and hinge stiles as show.
- 2. If Cylinder Key Lock is to be used, prepare inside and outside of lock stile as shown.
- 3. Insert Rod and Case Assembly into lock stile and secure with (2) 1/4-20 Shoulder Studs.
- 4. If Key Lock is used, insert Cylinder in Mounting Pad and secure with Locking Ring. Install using (2) #8-32x1-23.8mm Flat Head Machine Screws.
- 5. Position Exit Pad over stile and attach Actuator Link to Actuator Pin using Connecting Pin provided. Place on stile over 1/4-20 Shoulder Studs and tighten 3 Socket Head Set Screws to secure in place.
- 6. Adjust length of top and bottom Latch Bolts by turning in or out. When the Panic Arm is fully depressed, the Latch Bolts should be slightly recessed from flush with the top and bottom of the door. NOTE: Flat notch side of Bolt **must** face the outside of the door. Install top and bottom Latch Bolt Guides using (6) #10x12.7mm Flat Head Self-threading Screws.
- 7. Install (2) 1/4-20 Shoulder Studs on hinge stile. Place other Exit Pad over Studs and tighten 3 Socket Head Set Screws to secure in place.
- 8. Prepare header and threshold as shown. If Header and Threshold Strikes are required, install using (4) #8x9.5mm Flat Head Self-threading Screws or (4)#8x25.4mm Flat Head All-purpose screws.

DOGGING EXIT DEVICE USING DOGGING PIN:

Fully depress push paddle and hold, push up Dogging Pin with screwdriver and rotate 90° in either direction.

TO RELEASE EXIT DEVICE:

Hold push paddle down and rotate Dogging Pin with screwdriver in either direction until Dogging Pin releases.

DOGGING EXIT DEVICE USING CYLINDER KEY:

Fully depress push paddle and hold, turn Key clockwise approximately 60°, return Key to centre and remove.

TO RELEASE EXIT DEVICE:

Turn key counterclockwise 90°, return Key to centre and remove.



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE NTS @A4 DATE MARCH 2014




TITLE CONCEALED ROD PADDLE HANDLE PR-7085P SERIES EXIT DEVICE


SUB TITLE FITTING GUIDE FOR DOGGING PIN DP-713




1) Remove securing screw in back of handle unit



2) Once securing screw is removed existing pin should be ejected by internal spring



3) Replace existing pin with knurled pin (retaining original spring)




4) Replace securing screw holding knurled pin in far enough that notch on dogging pin can locate on securing screw



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |

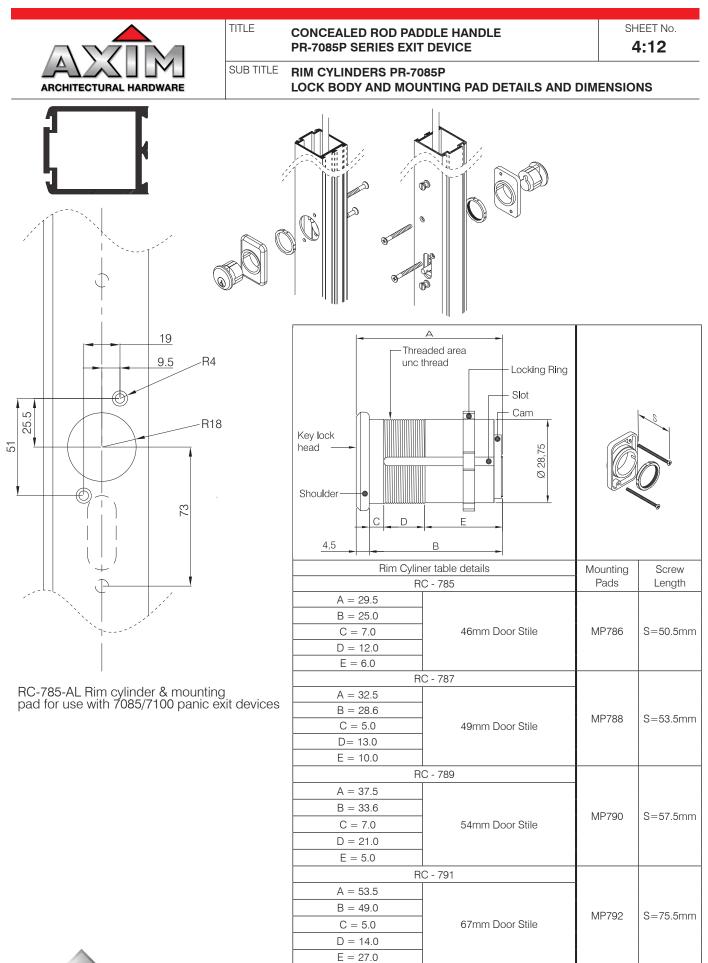



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk SCALENTS @A4DATEMARCH 2023




TITLE CONCEALED ROD PADDLE HANDLE **PR-7085P SERIES EXIT DEVICE**

SHEET No. 4:13

SUB TITLE

KEY CONTROLLED OUTSIDE TRIM LOCKING HANDLE FOR PR7085, PR7085P & PR7100 EXIT DEVICES

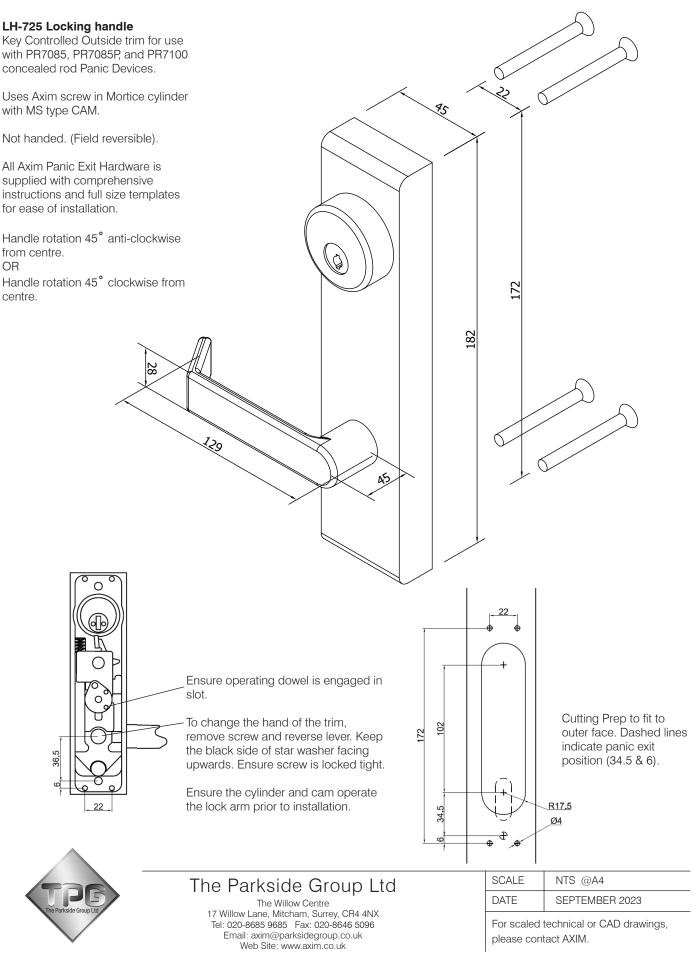





TITLE CONCEALED ROD PADDLE HANDLE PR-7085P SERIES EXIT DEVICE

SHEET No.

SUB TITLE LOCKING HANDLES DETAILS AND DIMENSIONS

| | Locking Handle | Pin Length | Door Stile |
|----|----------------|------------|------------|
| | LH-725 | P = 6 mm | 46mm |
| | LH-730 | P = 9 mm | 49mm |
| | LH-740 | P = 14 mm | 54mm |
| | LH-745 | P = 27 mm | 67mm |
| 27 | LH-760 | P = 23 mm | 64mm |

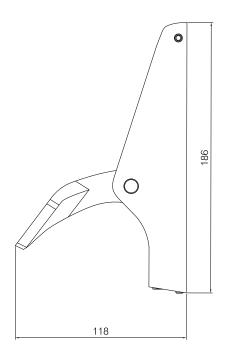

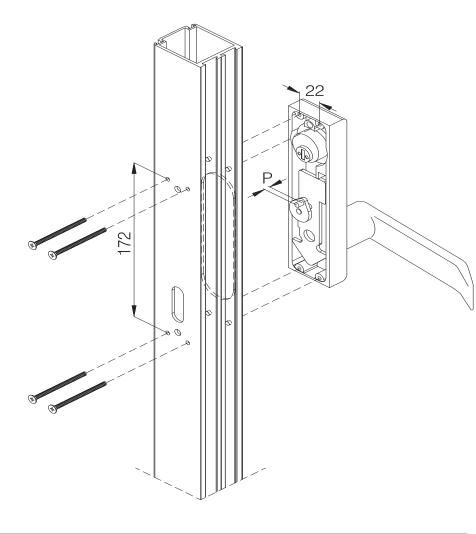



0

PUSH

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |



RIM-MOUNTED CRASH BAR PR-7095 SERIES EXIT DEVICE

SUB TITLE TECHNICAL INFORMATION

TITLE

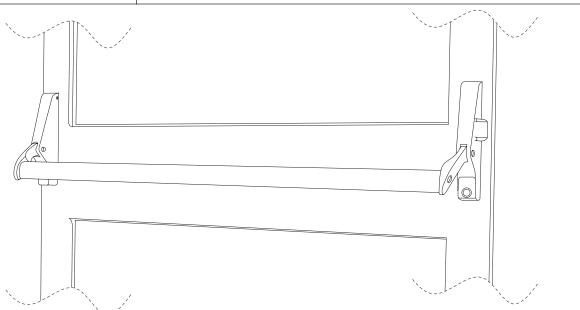

RIM MOUNTED, PANIC EXIT DEVICE

Matching active and in-active housings to present a balanced appearance. Housings assembled to be right or left handed. Please check handing and specify when ordering.

Heavy duty lever springs for durable operation of lever arms.


Hardened latch bolt for added security. Narrow width, surface mounted strike supplied, adjustable after installation. Standard model suitable for doors of up to

1155mm wide. 1500mm long crossbars available for extra wide doors. Cross bars can be cut to suit

exact requirement. Available with standard rim cylinder that can be fitted directly to the door allowing

operation from the outside. Permanent latch retention by either cylinder key from outside or concealed pins under levers.

Anodised crossbars in:-Silver Satin, Dark Bronze & Black. Housings and lever arms stoved, abrasive resistant finish to match anodised finishes. Easy to follow instructions and full size templates supplied with every unit. HAND OF DOOR



ACCESSORIES

Rim cylinder for access from outside. (2 keys.) **RC-795-AL** - 46mm to 54mm DOOR STILE - Silver **RC-795-DU** - 46mm to 54mm DOOR STILE - Bronze **RC-795-BK** - 46mm to 54mm DOOR STILE - Black **RC-795-AL** - 46mm to 67mm DOOR STILE - Silver **RC-797-AL** - 46mm to 67mm DOOR STILE - Silver **RC-797-AL-S** - 46mm to 67mm DOOR STILE - Silver

Push bar, 1500mm. For wide doors cut to suit. **CB-742-AL** - 1066.8mm - CRASH BAR - Silver **CB-748-AL** - 1219.2mm - CRASH BAR - Silver **CB-760-AL** - 1524mm - CRASH BAR - Silver Other finishes available to special order.

Paddle handle **PR-7095-AL-L** - Left hand - Silver **PR-7095-AL-R** - Right hand - Silver **PR-7095-P-AL-LH** - Left hand - Silver **PR-7095-P-AL-RH** - Right hand - Silver Other finishes available to special order.

GUARANTEE


AXIM HANDLES ARE GUARANTEED FOR 12 MONTHS AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2017 |







TITLE RIM-MOUNTED CRASH BAR PR-7095 SERIES EXIT DEVICE

SUB TITLE INSTALLATION INSTRUCTIONS PR-7095





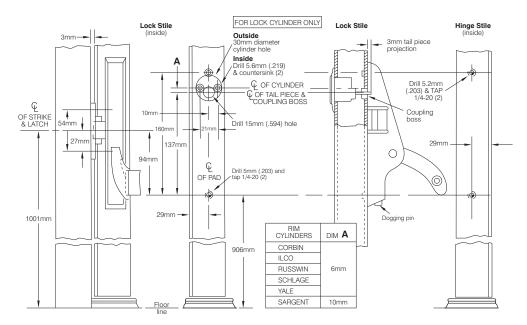

Preparation

- 1. Determine hand of door and prepare inside of lock and hinge stiles as show.
- 2. If cylinder Key Lock is to be used, prepare inside and outside of lock stile as shown.
 - A Cut Spindle of Rim Cylinder to project thru the door 3mm Install Rim Cylinder and secure with (2) 12-24x29mm Machine Screws NOTE: Screw heads must be flush.
 - B Determine Function of Key Cylinder:
 - STANDARD: Key removable in either locked or unlocked position. With Latch fully released, rotate Coupling Boss so index mark is up.
 - (2) NIGHT LATCH: Key removable in locked position only. With latch fully released, rotate Coupling Boss 90^o towards hinge side.
- Install (2) 1/4-20 Shoulder Studs on lock stile and position Exit Latch Pad over Studs and insert Cylinder Spindle into Coupling Boss. Place Pad over Studs and tighten 3 Socket Head Set Screws to secure in place.
- Install (2) 1/4-20 Shoulder Studs on hinge stile and place other Exit Pad over Studs and tighten 3 Socket Head Set Screws to secure in place.
- 5. Measure distance from inside edge to inside edge of Exit Pads for proper Cross Bar length. Cut Cross Bar CAUTION: Cross Bar length must be within \pm 1mm for unit to function properly.
- Loosen 3 Set Screws on hinge stile Exit Pad and install Cross Bar using (2) 1/4-20 x25mm Oval Head Self-threading Screws. Tighten 3 Set Screws to secure in place.
- 7. Prepare lock jamb for Strike as shown and install using (2) #10 x 13mm Flat Head Self-threading Screws or #10 x 32mm All-purpose Screws.

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

DOGGING EXIT DEVICE USING DOGGING PIN:

Fully depress Cross Bar and hold, push up Dogging Pin with screwdriver and rotate 90° in either direction.

TO RELEASE EXIT DEVICE:

Hold Cross Bar down and rotate Dogging Pin with screwdriver in either direction until Dogging Pin releases.

DOGGING EXIT DEVICE USING <u>CYLINDER KEY:</u> Turn Key toward hinge side approximately 360°.

TO RELEASE EXIT DEVICE:

Turn Key toward latch side approximately 360°.


 SCALE
 NTS @A4

 DATE
 MARCH 2014



TITLE RIM-MOUNTED CRASH BAR PR-7095 SERIES EXIT DEVICE

SUB TITLE RIM MOUNTED CRASH BAR PANIC EXIT DEVICE PR-7095

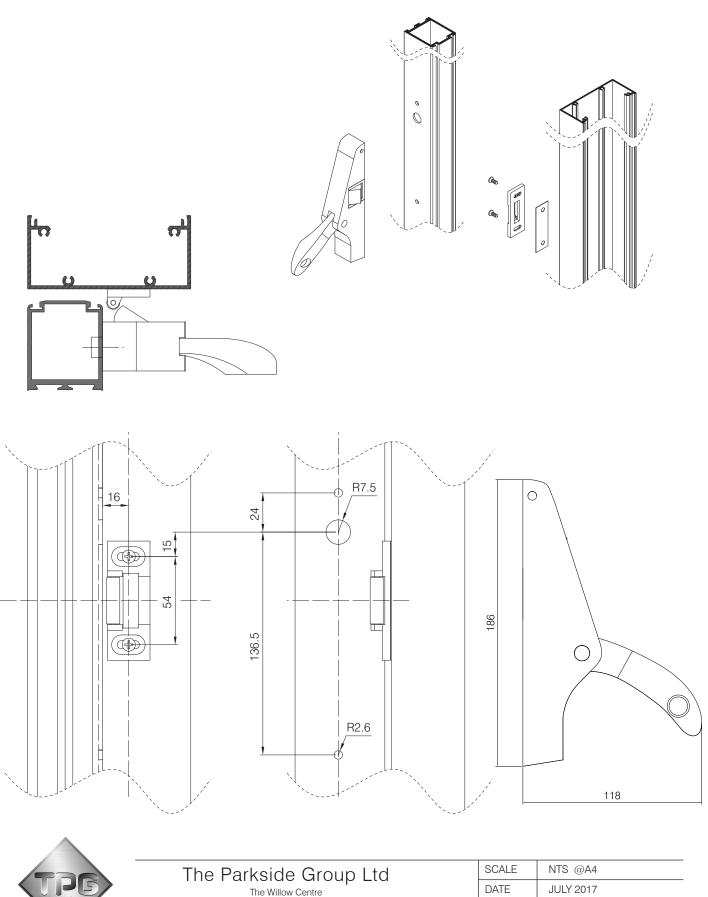

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk




TITLE RIM-MOUNTED CRASH BAR PR-7095 SERIES EXIT DEVICE

SHEET No. 4:18

SUB TITLE RIM CYLINDERS FOR AXIM PANIC EXIT DEVICES

RC-795-AL Rim cylinder & mounting pad for use with 7095 panic exit devices

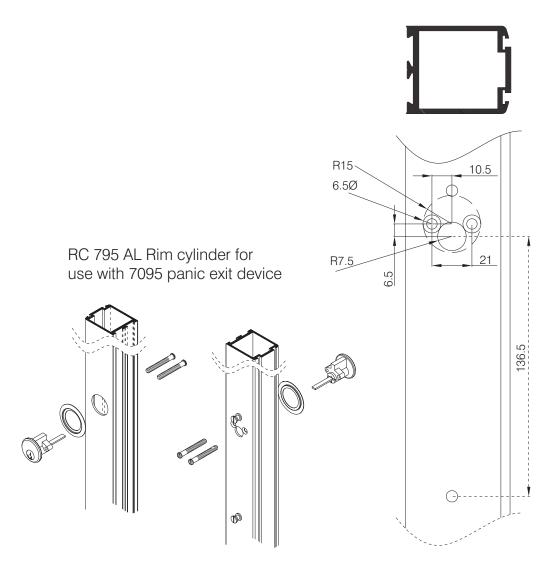





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |

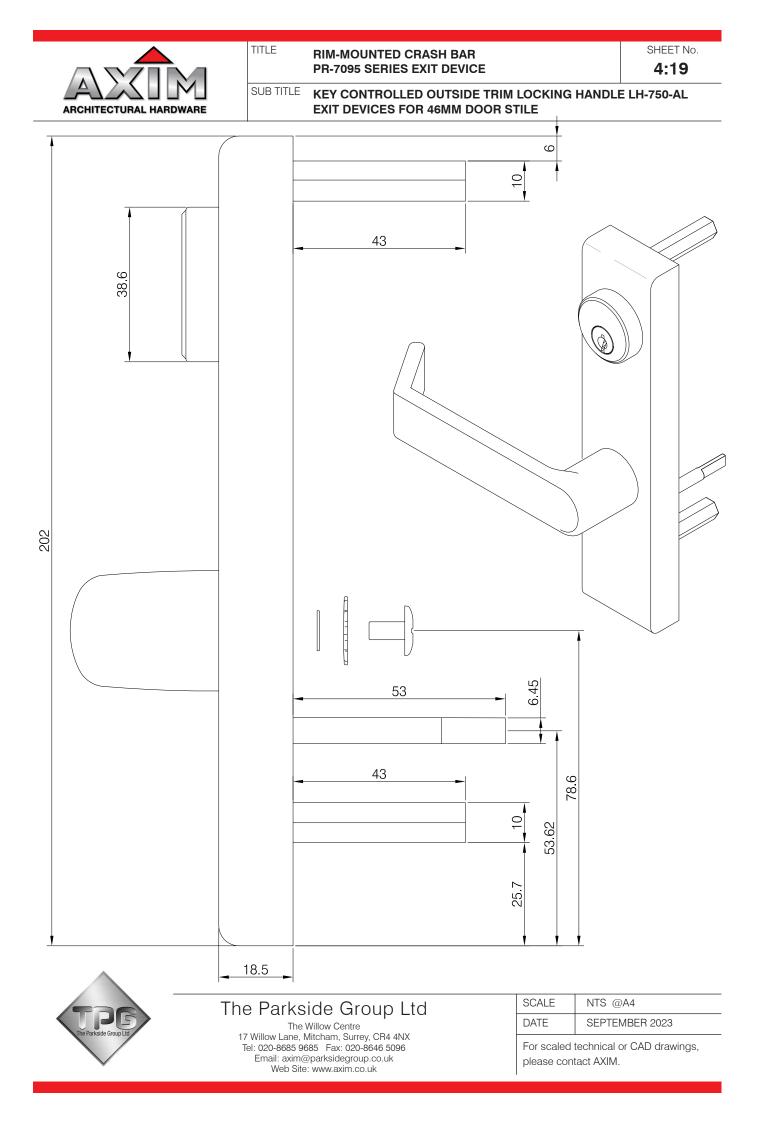


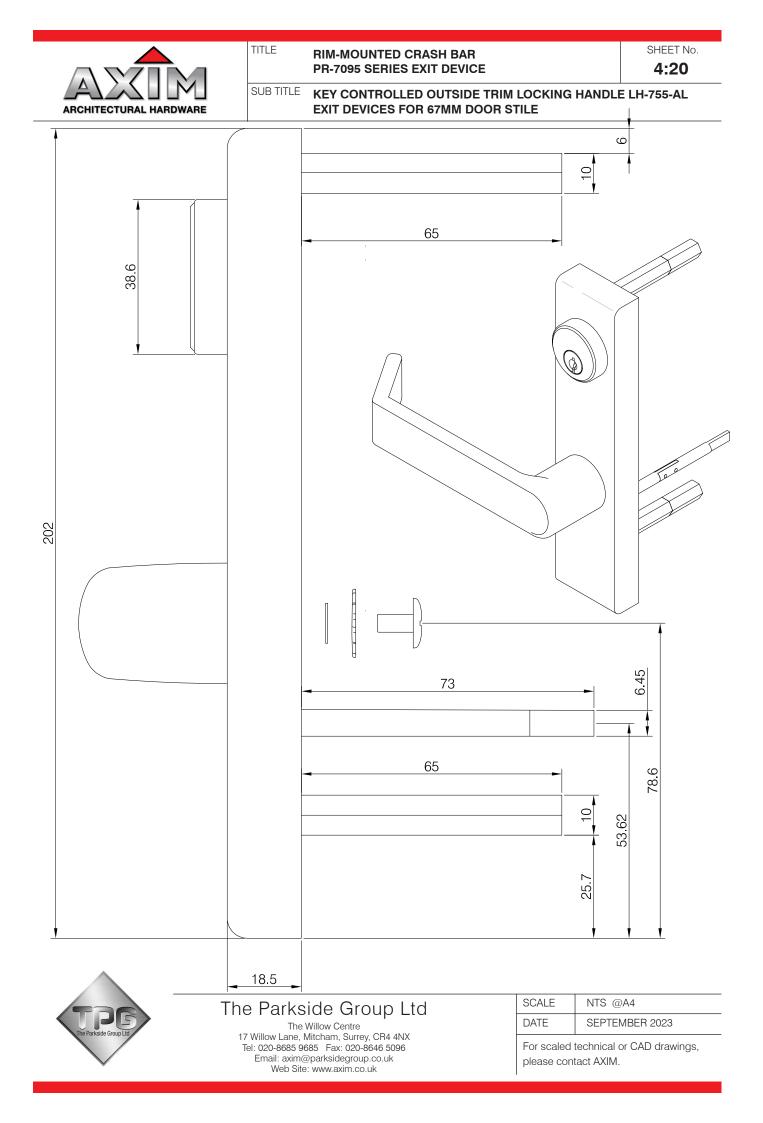



SUB TITLE **TECHNICAL INFORMATION**

TITLE

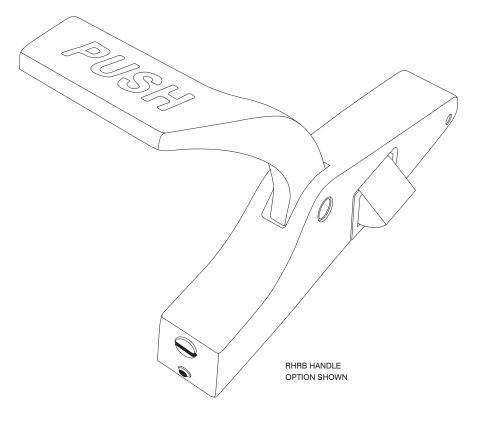

RIM MOUNTED, PANIC EXIT DEVICE

Available with standard mortice rim cylinder and lever allowing external access.

MATERIAL FINISH

Lever Handles are satin chrome finish to complement most door colours and are clearly marked 'PUSH'.

All Axim Panic Exit Hardware is supplied with comprehensive instructions and full size templates for ease of installation.


ACCESSORIES

Rim cylinder for access from outside Product codes:-


RC-795-AL - 46 to 54mm - DOOR STILE - Silver RC-795-DU - 46 to 54mm - DOOR STILE - Bronze RC-795-BK - 46 to 54mm - DOOR STILE - Black RC-795-AL-S - 46 to 54mm - DOOR STILE - Silver RC-797-AL - 46 to 67mm - DOOR STILE - Silver RC-797-AL-S - 46 to 67mm - DOOR STILE - Silver



HAND OF DOOR



INSIDE



GUARANTEE

AXIM HANDLES ARE GUARANTEED FOR 12 MONTHS AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED. AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |




TITLE **RIM-MOUNTED PADDLE HANDLE PR-7095P SERIES EXIT DEVICE**

SUB TITLE **INSTALLATION INSTRUCTIONS PR-7095P**

L.H.R.B. Door shown



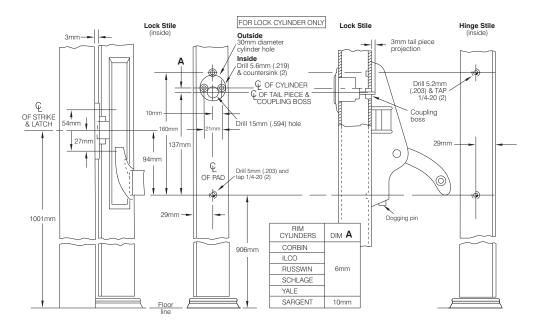

Preparation

- 1. Determine hand of door and prepare inside of lock and hinge stiles as shown.
- If cylinder Key Lock is to be used, prepare inside and outside of lock stile as shown.
 - A Cut Spindle of Rim Cylinder to project thru the door 3mm Install Rim Cylinder and secure with (2) 12-24x29mm Machine Screws NOTE: Screw heads must be flush.
 - B Determine Function of Key Cylinder:
 - STANDARD: Key removable in either locked or unlocked position. With Latch fully released, rotate Coupling Boss so index mark is up.
 - (2) NIGHT LATCH: Key removable in locked position only. With latch fully released, rotate Coupling Boss 90° towards hinge side.



3. Install (2) 1/4-20 Shoulder Studs on lock stile and position Exit Latch Pad over Studs and insert Cylinder Spindle into Coupling Boss. Place Pad over Studs and tighten 3 Socket Head Set Screws to secure in place.

Prepare lock jamb for Strike as shown and install using (2) #10 x 13mm Flat Head Self-threading Screws or #10 x 32mm All-purpose Screws.

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096

Email: axim@parksidegroup.co.uk

Web Site: www.axim.co.uk

DOGGING EXIT DEVICE USING DOGGING PIN:

Fully depress Cross Bar and hold, push up Dogging Pin with screwdriver and rotate 90° in either direction.

TO RELEASE EXIT DEVICE:

Hold Cross Bar down and rotate Dogging Pin with screwdriver in either direction until Dogging Pin releases.

DOGGING EXIT DEVICE USING CYLINDER KEY: Turn Key toward hinge side approximately 360°.

TO RELEASE EXIT DEVICE:

Turn Key toward latch side approximately 360°.


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



TITLE RIM-MOUNTED PADDLE HANDLE PR-7095P SERIES EXIT DEVICE

SHEET No. **4:23**

SUB TITLE RIM CYLINDERS FOR AXIM PANIC EXIT DEVICES

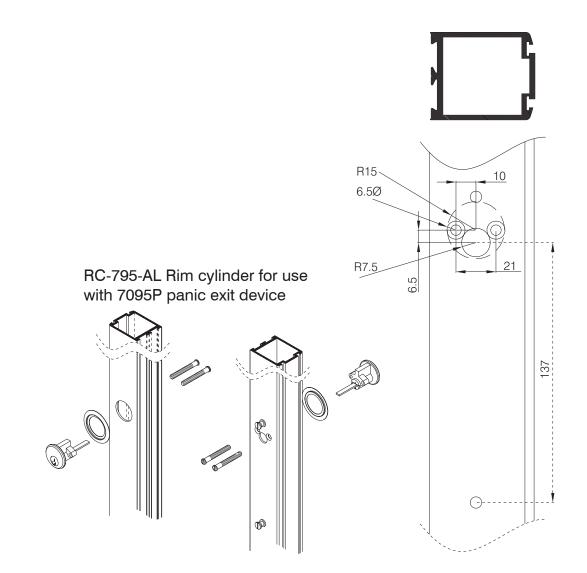





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |

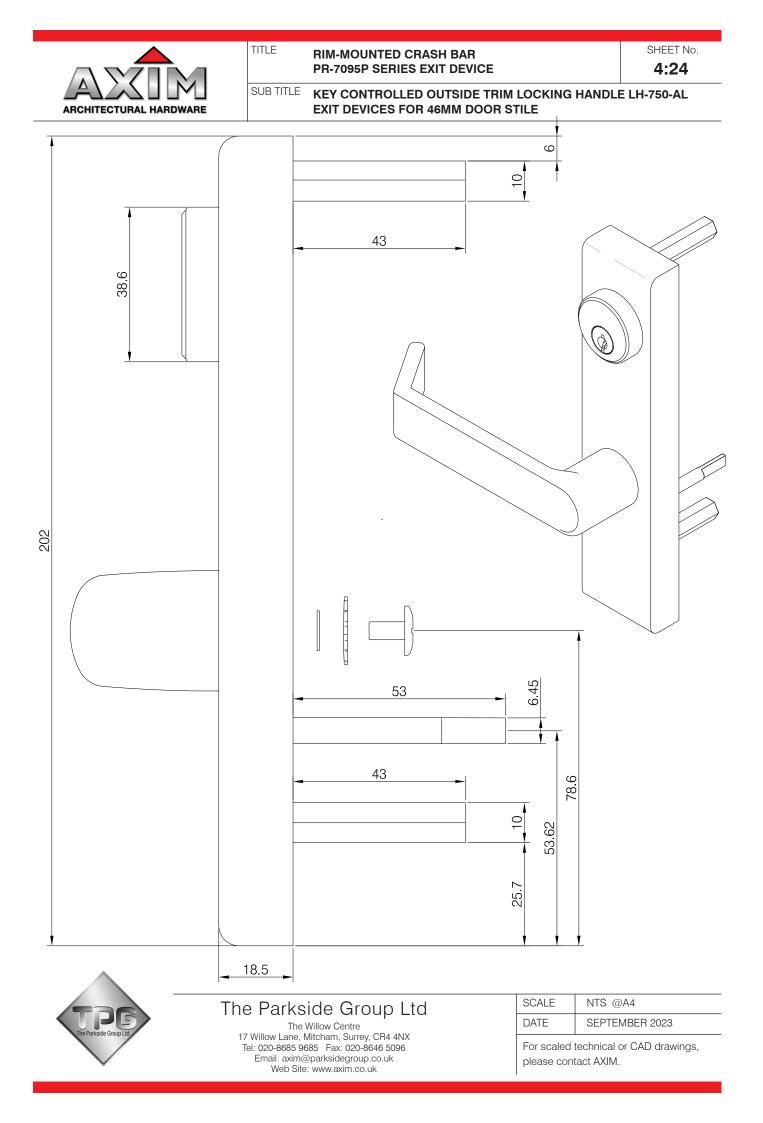

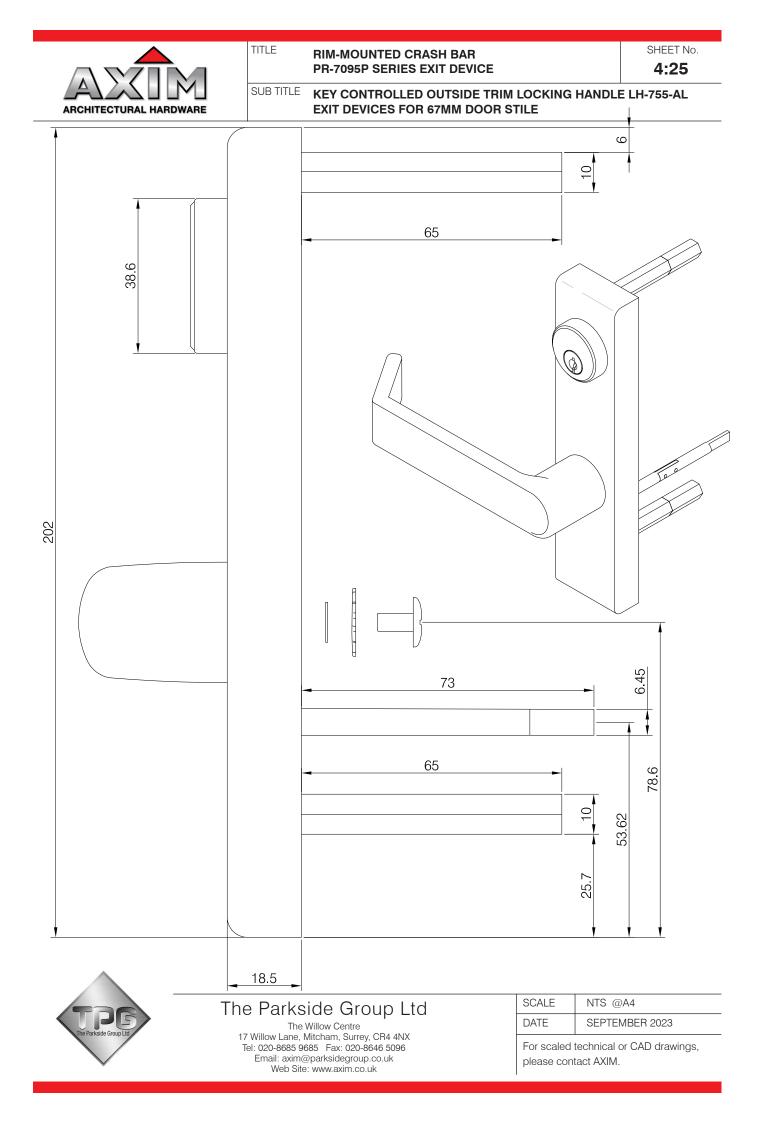



CONCEALED ROD SOFT TOUCH BAR PR-7100 SERIES

SHEET No. **4:26**

SUB TITLE TECHNICAL INFORMATION PR-7100

CONCEALED ROD, PANIC EXIT DEVICE

Heavy duty lever springs and internal mechanism for durable, smooth operation.

TITLE

Plated steel and stainless steel internal components. 8.5mm diameter, steel locking rods with 16mm bolt throw.

Bolt length adjustable ensuring correct alignment. Standard model suitable for door widths as narrow as 700mm and 2135 high. 300mm & 600mm coupling rods are available for taller doors.

Available with standard mortice rim cylinder and mounting pad allowing external access. Permanent bolt retention for easy access can be achieved with cylinder key from outside or hexagon key in the touch bar.

Extruded aluminium touch bar, anodised finish with coloured alloy end caps to match.

All Axim panic exit hardware is supplied with comprehensive instructions and full size templates for ease of installation.

MODEL SELECTION

Determine the hand of the door using the diagram above and enter the correct designation after the series number.

Example: PR-7100-AL-LHRB NOTE: Units are stocked in both right and left hand but are easily field reversible.

ACCESSORIES

Extension rod with coupling for doors over 2135mm high (plated steel) **RE-712** - 300mm Extension rod **RE-714** - 600mm Extension rod **RE-716** - 1000mm Extension rod

Dogging pin **DP-713** - Silver

Locking handles

| LH-725-AL - 46mm DOOR STILE - Silver |
|--------------------------------------|
| LH725-BK - 46mm DOOR STILE - Black |
| LH-730-AL - 49mm DOOR STILE - Silver |
| LH-740-AL - 54mm DOOR STILE - Silver |
| LH-745-AL - 67mm DOOR STILE - Silver |
| LH-760-AL - 64mm DOOR STILE - Silver |

Rim cylinder for access from outside **Product codes**;

RC-785-AL - 46mm DOOR STILE - Silver RC-785-DU - 46mm DOOR STILE - Bronze RC-785-BK - 46mm DOOR STILE - Black RC-785-AL-S - 46mm DOOR STILE - Silver RC-787-AL - 49mm DOOR STILE - Silver RC-789-AL - 54mm DOOR STILE - Silver RC-789-AL-S - 54mm DOOR STILE - Silver RC-791-AL - 67mm DOOR STILE - Silver RC-791-AL-S - 67mm DOOR STILE - Silver


Cylinder mounting pad for above including fixings **Product codes;**

MP-786-AL - 49mm DOOR STILE - Silver MP-786-DU - 49mm DOOR STILE - Bronze MP-786-BK - 49mm DOOR STILE - Black MP-780-AL - 49mm DOOR STILE - Silver





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

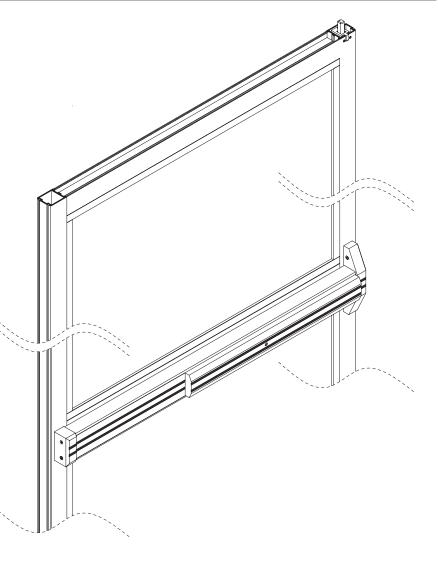







| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



TITLE CONCEALED ROD SOFT TOUCH BAR PR-7100 SERIES

SHEET No. **4:27**

SUB TITLE CONCEALED ROD TOUCH BAR PANIC EXIT DEVICE PR-7100


Panic exit device, concealed vertical rod, 42" flat touch bar

| Aluminium | PR-7100-AL |
|-----------|------------|
| Black | PR-7100-BK |

Extension rod with coupler(300mm extension)RE-712(600mm extension)RE-714(1000mm extension)RE-716

| Rim cylinder lock | (supplied with 2 keys) |
|-------------------|------------------------|
| Aluminium | RC-785-AL |
| Bronze | RC-785-DU |
| Black | RC-785-BK |

| Rim cylinder | lock keyed alike |
|--------------|------------------|
| Aluminium | RC-785-AL KA |

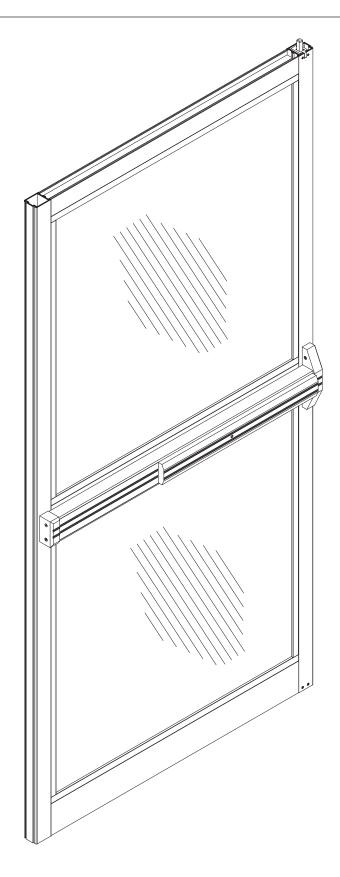



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



l.6mm -

12.7mm DOOR STOP SHOWN

4.8mm

TOP OF DOOR

11.9m

30 2

30.2

923.9mm to bottom

160.3

Lock stile

-**(**)-

+

÷Ð

9.5 9.5 mm mm

 $+ \odot$

⊕

and

€ of

19

←29.4mm →


TITLE CONCEALED ROD SOFT TOUCH BAR PR-7100 SERIES

SHEET No.

→ - 1.6mm

12.7mm DOOR STOP SHOWN

4:28

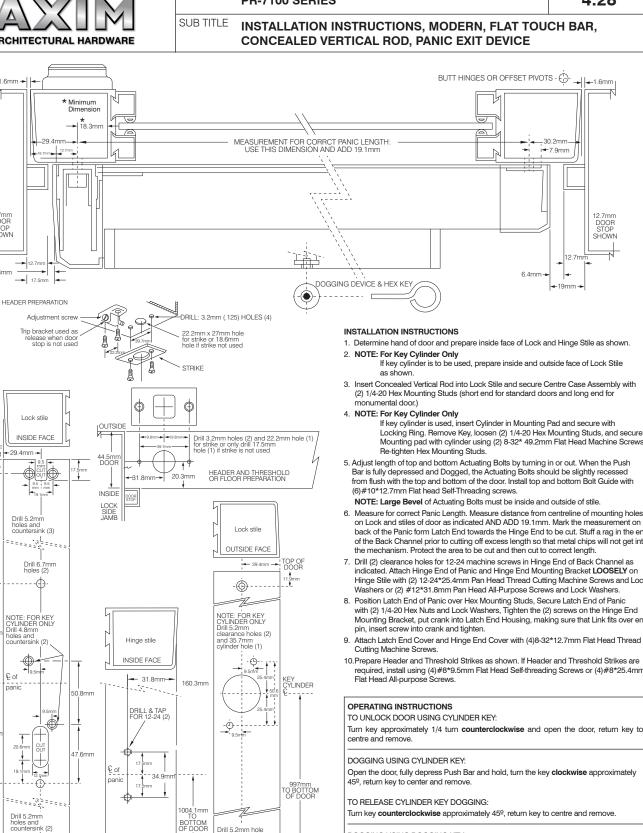

Turn key counterclockwise approximately 45°, return key to centre and remove.

DOGGING USING DOGGING KEY:

Fully depress Push Bar and hold. Using Hex Dogging Key **push in** dogging device and turn **clockwise** approximately 1/2 turn.

TO RELEASE DOGGING KEY DOGGING:

Hold Touch Bar down. Using Hex Dogging Key **push in** Dogging Device and Turn **counterclockwise** approximately 1/2 turn. Dogging will be released.





The Parkside Group Ltd

Drill 5.2mm hole

-@

-3

2

BOTTOM OF DOOF

BOTTOM OF DOOR

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


NTS @A4 SCALE DATE MARCH 2014


For scaled technical or CAD drawings, please contact AXIM.


- 1. Determine hand of door and prepare inside face of Lock and Hinge Stile as shown.
- If key cylinder is to be used, prepare inside and outside face of Lock Stile
- 3. Insert Concealed Vertical Rod into Lock Stile and secure Centre Case Assembly with (2) 1/4-20 Hex Mounting Studs (short end for standard doors and long end for


If key cylinder is used, insert Cylinder in Mounting Pad and secure with Locking Ring. Remove Key, loosen (2) 1/4-20 Hex Mounting Studs, and secure Mounting pad with cylinder using (2) 8-32* 49.2mm Flat Head Machine Screws. Re-tighten Hex Mounting Studs.

- 5. Adjust length of top and bottom Actuating Bolts by turning in or out. When the Push Bar is fully depressed and Dogged, the Actuating Bolts should be slightly recessed from flush with the top and bottom of the door. Install top and bottom Bolt Guide with
- Measure for correct Panic Length. Measure distance from centreline of mounting holes on Lock and stiles of door as indicated AND ADD 19.1mm. Mark the measurement on
- back of the Panic form Latch End towards the Hinge End to be cut. Stuff a rag in the end of the Back Channel prior to cutting off excess length so that metal chips will not get into the mechanism. Protect the area to be cut and then cut to correct length.
- Drill (2) clearance holes for 12-24 machine screws in Hinge End of Back Channel as indicated. Attach Hinge End of Panic and Hinge End Mounting Bracket LOOSELY on Hinge Stile with (2) 12-24*25.4mm Pan Head Thread Cutting Machine Screws and Lock Washers or (2) #12*31.8mm Pan Head All-Purpose Screws and Lock Washers.
- Position Latch End of Panic over Hex Mounting Studs, Secure Latch End of Panic with (2) 1/4-20 Hex Nuts and Lock Washers, Tighten the (2) screws on the Hinge End Mounting Bracket, put crank into Latch End Housing, making sure that Link fits over end
- 9. Attach Latch End Cover and Hinge End Cover with (4)8-32*12.7mm Flat Head Thread
- 10. Prepare Header and Threshold Strikes as shown. If Header and Threshold Strikes are required, install using (4)#8*9.5mm Flat Head Self-threading Screws or (4)#8*25.4mm Flat Head All-purpose Screws.

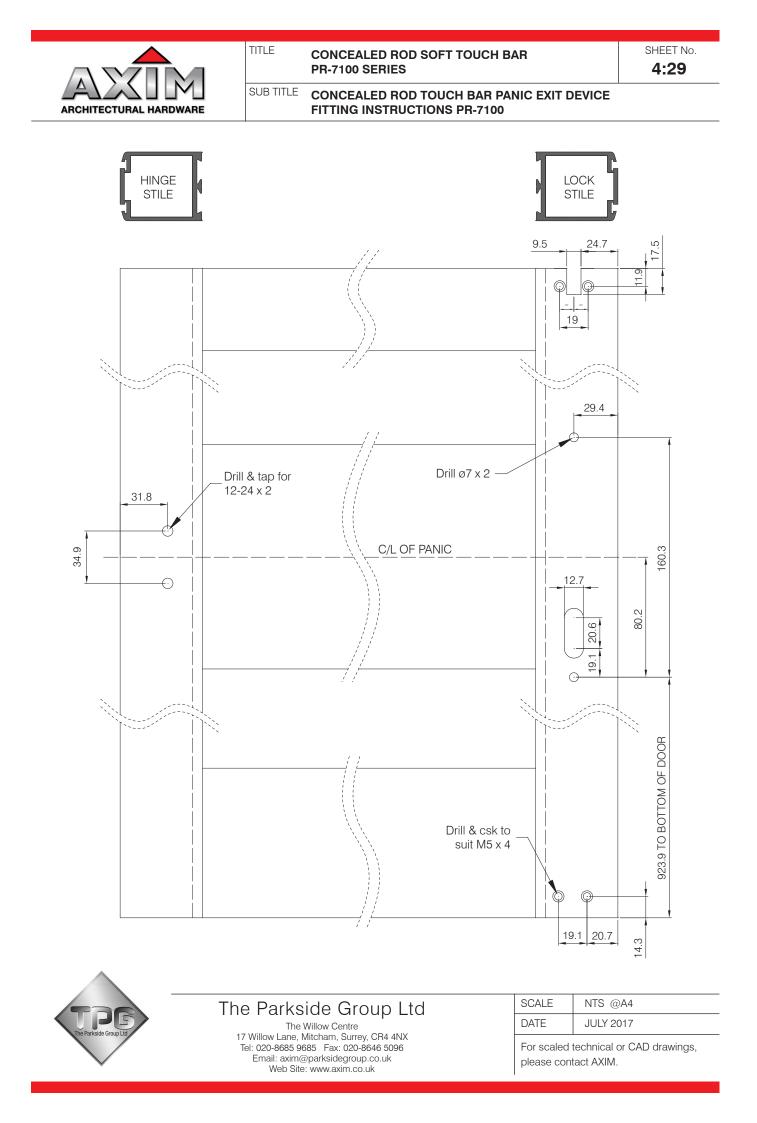

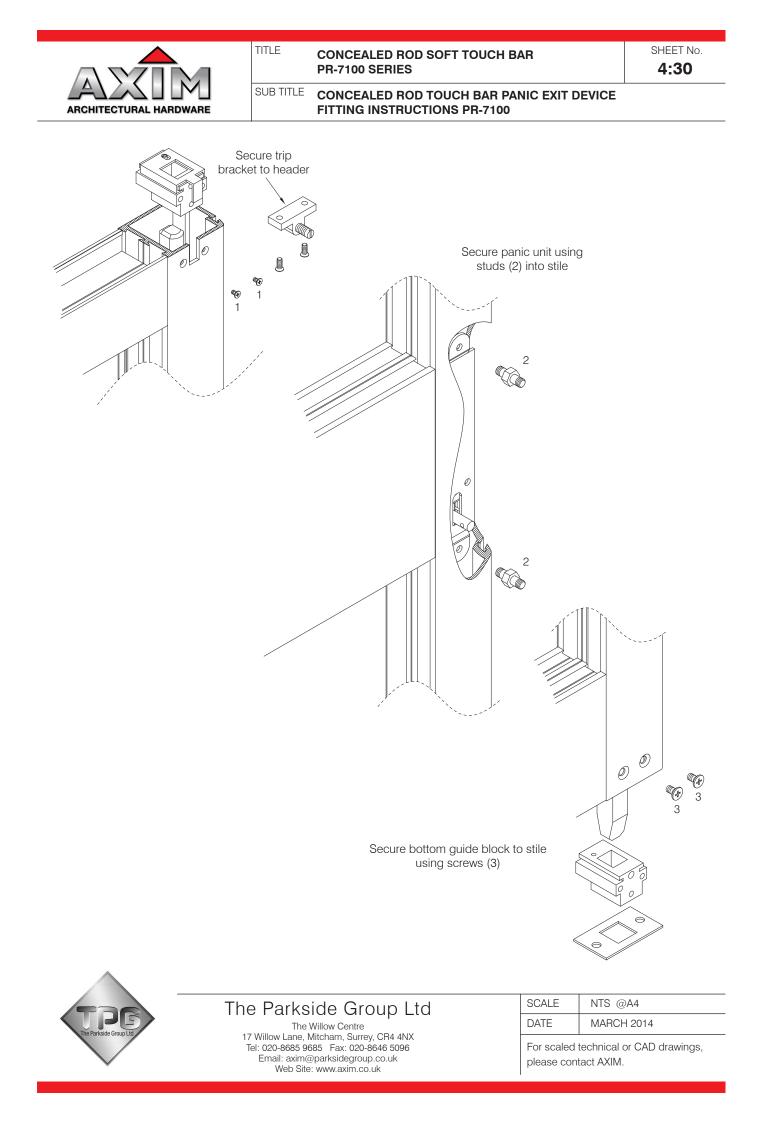

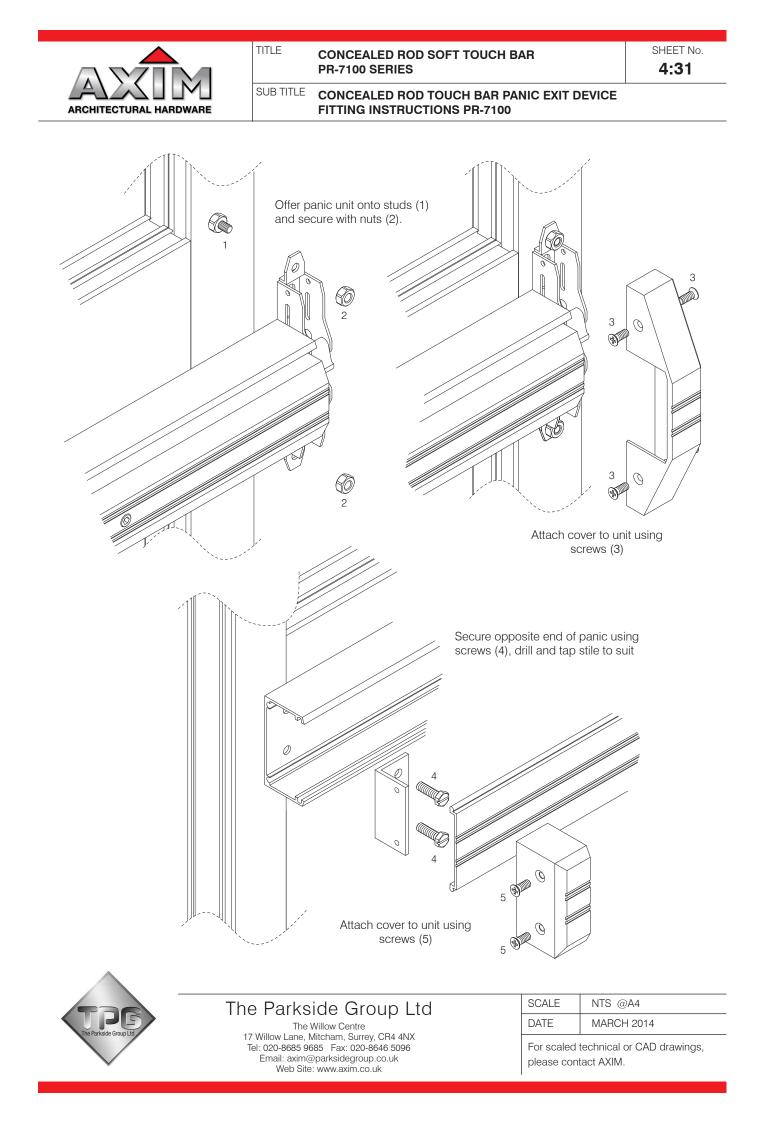

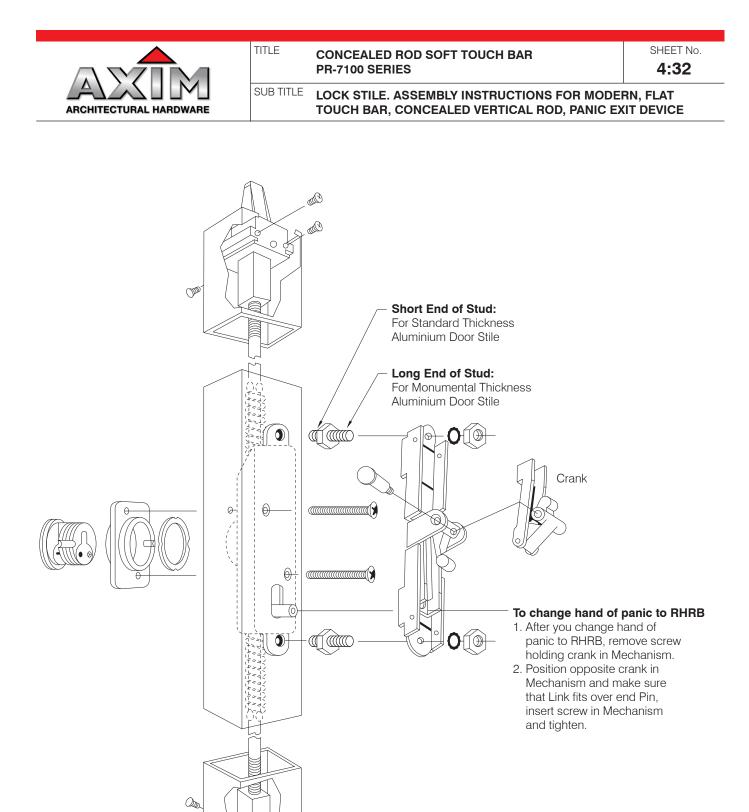



The Parkside Group Ltd

Ø

Ø

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



| TITLE | CONCEALED ROD SOFT TOUCH BAR |
|-------|------------------------------|
| | PR-7100 SERIES |

SHEET No. 4:33

SUB TITLE INTENTIONALLY BLANK

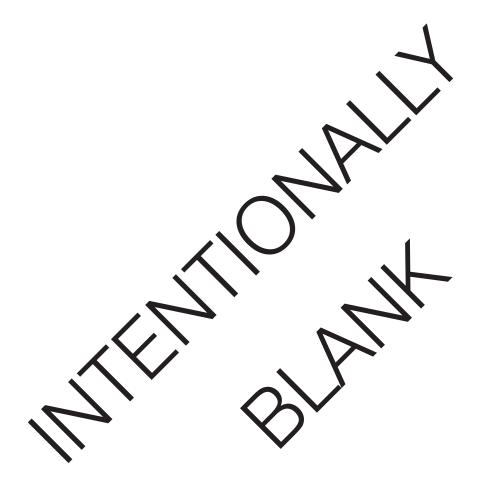



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | NOVEMBER 2019 |



TITLE CONCEALED ROD SOFT TOUCH BAR PR-7100 SERIES

SUB TITLE KEY CONTROLLED OUTSIDE TRIM LOCKING HANDLE FOR PR7085, PR7085P & PR7100 EXIT DEVICES

LH-725 Locking handle

Key Controlled Outside trim for use with PR7085, PR7085P, and PR7100 concealed rod Panic Devices.

Uses Axim screw in Mortice cylinder with MS type CAM.

Not handed. (Field reversible).

All Axim Panic Exit Hardware is supplied with comprehensive instructions and full size templates for ease of installation.


Handle rotation 45° anti-clockwise from centre.

Handle rotation 45° clockwise from centre.

 \cap

22

36,5

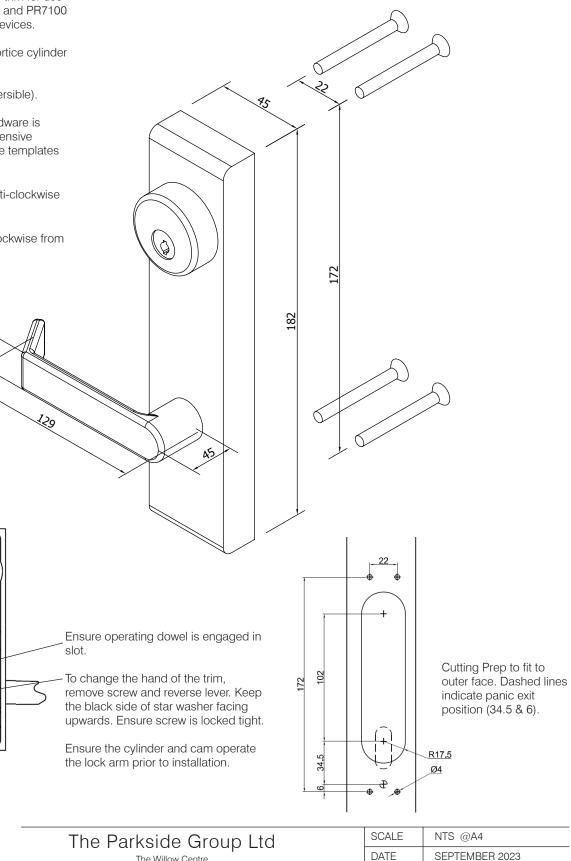


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk



TITLE CONCEALED ROD SOFT TOUCH BAR **PR-7100 SERIES**

SUB TITLE LOCKING HANDLES DETAILS AND DIMENSIONS

| | Locking Handle | Pin Length | Door Stile |
|--|----------------|------------|------------|
| | LH-725 | P = 6 mm | 46mm |
| | LH-730 | P = 9 mm | 49mm |
| | LH-740 | P = 14 mm | 54mm |
| | LH-745 | P = 27 mm | 67mm |
| | LH-760 | P = 23 mm | 64mm |

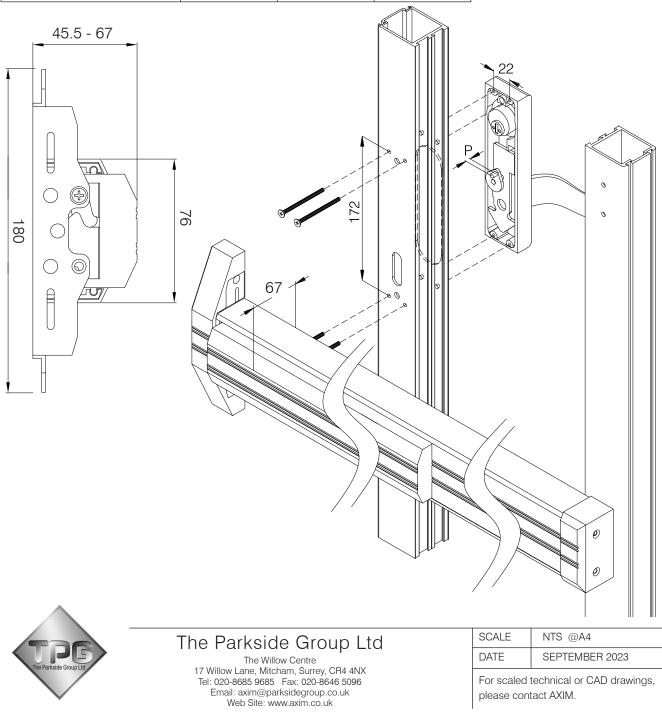



SUB TITLE **TECHNICAL INFORMATION**

TITLE

Axim PR-7200 Series - Full Width Panic Exit

Emergency and Panic Exit Devices must provide an easy method of escape for building occupants in the event of a fire or other emergencies, as well as provide security against intrusion and burglary.

Within these scenarios there are two types of users:

Those that are not trained in the emergency evacuation of the building, e.g. shoppers in a retail outlet

Or those that have been trained to use the device, e.g. office workers

Within these standards, it is classed that a horizontal bar device should be used for buildings where it is envisaged that the users will not have been trained in evacuation techniques.

The Axim PR 7200 Series provides solutions which comply to both standards ensuring that, whatever the project type, specifiers can rely on Axim PR 7200 Series to supply the solution. The Axim PR-7200 Full Width Series is compliant to BS EN 1125.

FEATURES

The Axim PR-7200 is a concealed, vertical rod panic exit device which secures the top and bottom of the door, except during the operating cycle when the rods are retracted with cylinder key or when the touch bar is locked down with an Allen key (dogged)

The internal mechanism is manufactured from stainless and plated steel, with 8.5mm diameter steel operating rods that provide a 16mm bolt throw

Optional external key access or locking handle are also available

The Axim PR-7200 is a full width soft touch panic exit device


Non-handed

The push bar is extruded aluminium in an anodised finish with coloured alloy end caps to match

All mounting screws are concealed

Available in 3 standard sizes PR-7200-36, PR-7200-42 & PR-7200-48 all of which can be cut to suit your required sizes

| PR-7200-36-AL | 36" - 914mm |
|---------------|--------------|
| PR-7200-42-AL | 42" - 1067mm |
| PR-7200-48-AL | 48" - 1219mm |

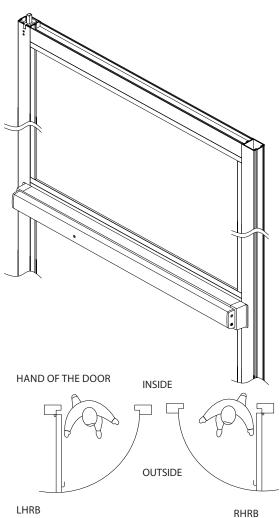

F

ACCESSORIES

| Rim Cylinder | |
|--------------|-----------------------------|
| RC-785-AL | (46mm door stile thickness) |
| RC-789-AL | (49mm door stile thickness) |
| RC-787-AL | (54mm door stile thickness) |
| RC791-AL | (67mm door stile thickness) |

Mounting Pad with Locking Ring MP-794-ÅL

Locking Handle

(46mm - 67mm door stile LH-720-AL thicknesses)



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


SCALE NTS @A4 DATE MAY 2024



SUB TITLE ASSEMBLY DETAILS

TITLE

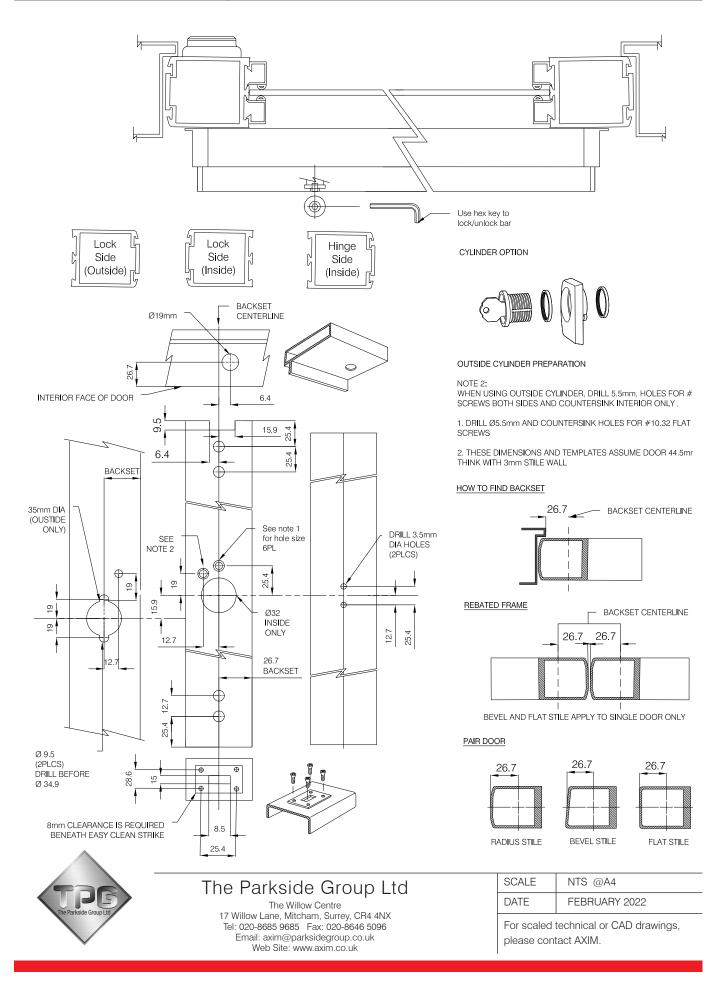


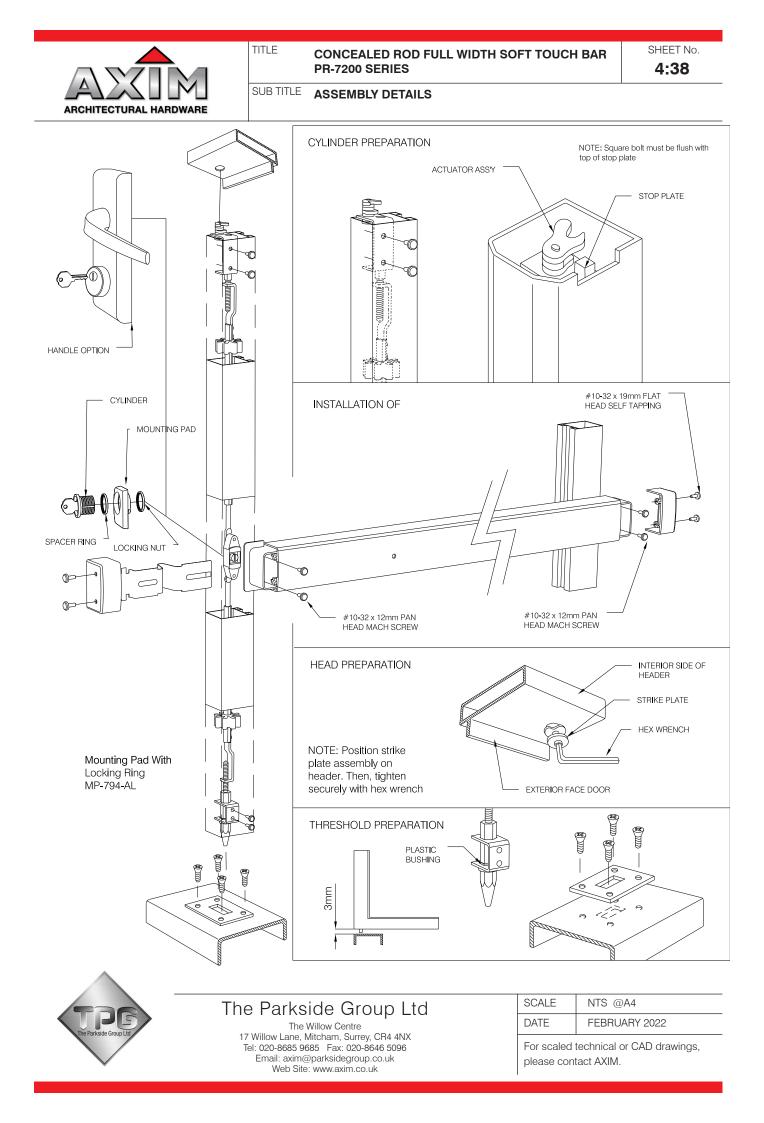



SUB TITLE ASSEMBLY DETAILS

TITLE

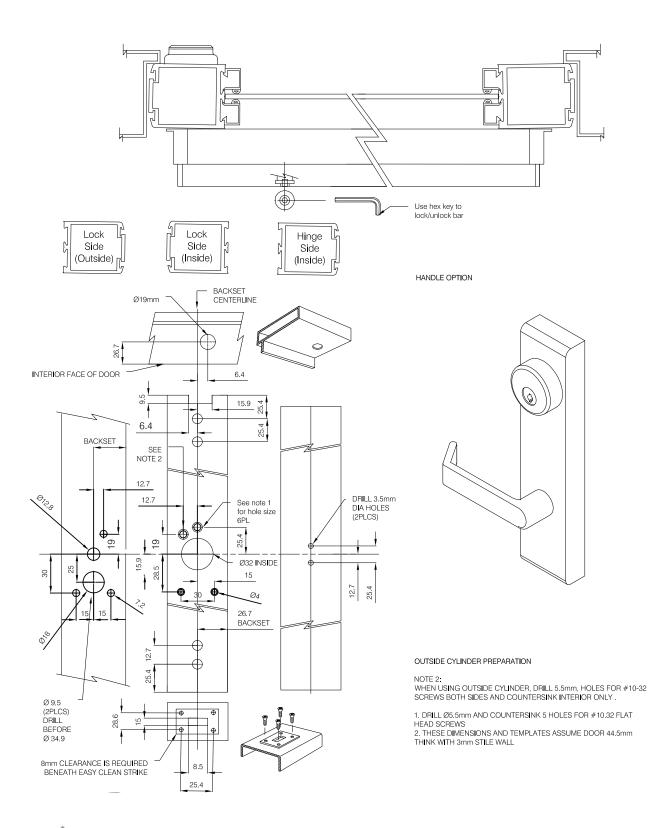




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 | |
|-------|----------------|--|
| DATE | SEPTEMBER 2023 | |

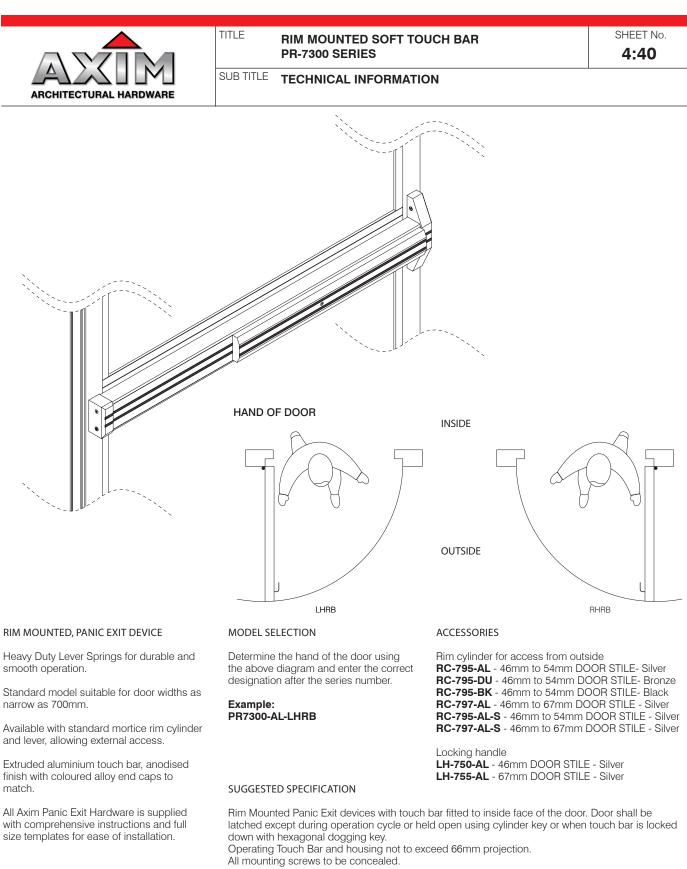

Handles and mechanism will be fitted with heavy duty springs for durability.

Ref: AXIM PR-7300 (Hand as specified)

GUARANTEE

AXIM HANDLES ARE GUARANTEED FOR 12 MONTHS AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



| TITLE | RIM MOUNTED SOFT TOUCH BAR |
|-------|----------------------------|
| | PR-7300 SERIES |

SUB TITLE RIM MOUNTED TOUCH BAR PANIC EXIT DEVICE PR-7300

Panic exit device: **PR-7300-AL** - 42" flat touch bar (non handed) - Silver

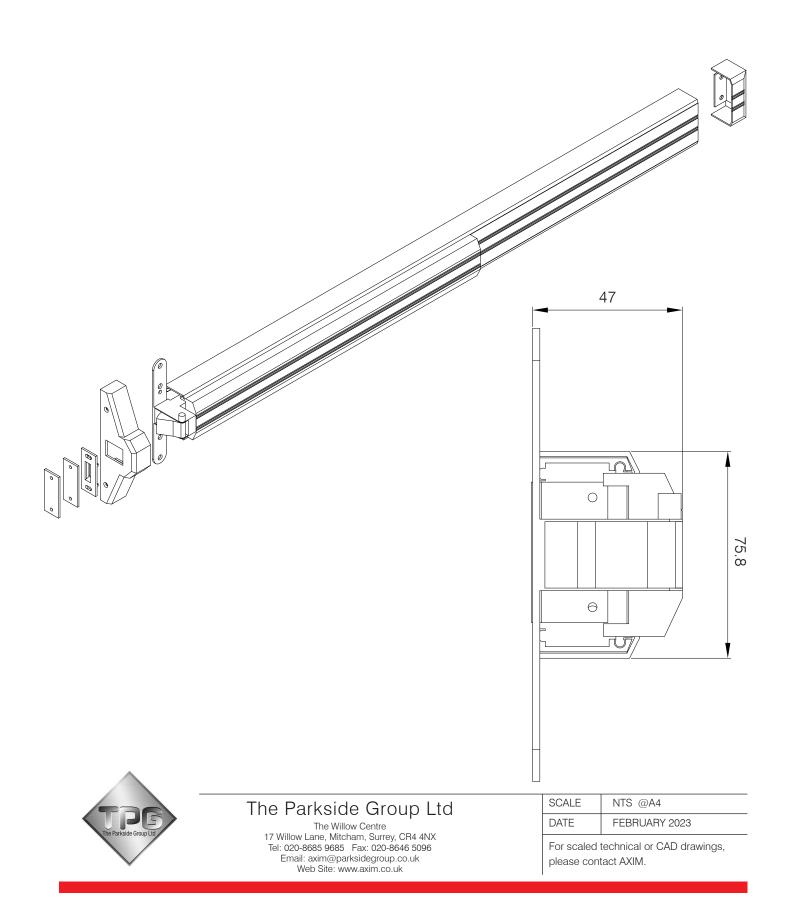



RIM MOUNTED SOFT TOUCH BAR PR-7300 SERIES

| SHEET | No. |
|-------|-----|
| 4:4: | 2 |

SUB TITLE

TITLE

INSTALLATION INSTRUCTIONS. MODERN, FLAT TOUCH BAR, RIM, PANIC EXIT DEVICE HOLLOW METAL OR WOOD DOORS

HOLLOW METAL DOORS – WITH REINFORCEMENT INSTALLATION INSTRUCTIONS

- 1. Determine hand of door and prepare inside face of Lock and Hinge Side as shown.
- NOTE: For Key Cylinder Only If key cylinder is to be used, prepare inside and outside face of Lock Stile of door as shown. Cut spindle of Rim Cylinder to project thru the door 4mm. Install Rim Cylinder and secure with (2) 12-24 Fillister Head Machine Screws.
 - NOTE: Cut off excess Screw length at break-off points as required.
- 3. Measure for correct Panic length. Measure distance from centreline of mounting holes on Lock and Hinge side of door as indicated AND ADD 22.2mm. Mark the measurement on back of the Panic from Latch End towards the Hinge End to be cut. Stuff a rag in the end of the Back Channel prior to cutting off excess length so that metal chips will not get into the mechanism. Protect the area to be cut and then cut to correct length.
- 4. Drill (2) clearance holes for 12-24 Machine Screws and Hinge End of Back Channel as indicated. Attach Hinge End of Panic and Hinge End Mounting Bracket LOOSLEY on Hinge Side with (2) 12-24*25.4mm Pan Head Thread Cutting Machine Screws and Lock Washers or (2)#12*31.8mm Pan Head All-Purpose Screws and Lock Washers.
- Install (2) 1/4-20 Shoulder Studs on Lock Side. Position Latch End of Panic over Hex Mounting Studs. Secure with (2) 1/4-20 Hex Nuts and Lock Washers; also with (4) 12-24*25.4mm Pan Head Thread Cutting Machine Screws and Lock Washers or (4) 12-24*25.4mm Pan Head All-Purpose

OPERATING INSTRUCTIONS

TO UNLOCK DOOR USING CYLINDER KEY:

Turn key approximately 1/4 turn in either direction and open door, return key to centre and remove. **NOTE:** Cylinder Key WILL NOT dog unit. Dogging is from inside with Hex Dogging Key only.

DOGGING USING DOGGING KEY:

Fully depress Touch Bar and hold. Using Hex Dogging Key **push in** Dogging Device and turn **clockwise** approximately 1/2 turn.

TO RELEASE DOGGING KEY DOGGING:

Hold Touch Bar down. Using Hex Dogging Key **push in** Dogging Device and turn **counterclockwise** approximately 1/2 turn. Dogging will be released.



Screws and Lock Washers. Tighten the (2) screws on the Hinge End Mounting Bracket.

- NOTE: If Key Cylinder is used, Cylinder Spindle must be inserted into Coupling Boss prior to fastening Latch End on door.
- Attach Latch End Cover and Hinge End Cover with (4) 8-32*12.7mm Flat Head Thread Cutting Machine Screws.
- Place Strike on Lock Jamb as shown, (Centred on Latch). Mark and Drill Jamb for (2) 10-24*19.1mm Pan Head Thread Cutting Machine Screws and Lock Washers or (2)#10*31.8mm Pan Head All Purpose Screws and Lock Washers.
- Position Latch End of Panic over Hex Mounting Studs, Secure Latch End of Panic with (2) 1/4-20 Hex Nuts and Lock Washers, Tighten the (2) screws on the Hinge End Mounting Bracket, put crank into Latch End Housing, making sure that Link fits over end pin, insert screw into crank and tighten.
- Attach Latch End Cover and Hinge End Cover with (4)8-32*12.7mm Flat Head Thread Cutting Machine Screws.
 NOTE: Use Spacers provided if required.

HOLLOW METAL AND WOOD DOORS – WITHOUT REINFORCEMENT INSTALLATION INSTRUCTIONS


- 1. Determine hand of door and prepare inside face of Lock and Hinge Side as shown.
- NOTE: For Key Cylinder Only If key cylinder is to be used, prepare inside and outside face of Lock Stile of door as shown. Cut spindle of Rim Cylinder to project thru the door 4mm. Install Rim Cylinder and secure with (2) 12-24 Fillister Head Machine Screws. NOTE: Cut off excess Screw length at
- break-off points as required.
 Measure for correct Panic length. Measure distance from centreline of mounting holes on Lock and Hinge Side of door as indicated AND ADD 22.2mm. Mark the measurement on the back of the Panic from Latch End towards the Hinge End to be cut. Stuff a rag in the end of the Back Channel prior to cutting off excess length so that metal chips will not get into the mechanism. Protect the area to be cut and then cut to correct length.
- Drill (2) clearance holes for 12-24 Machine Screws in Hinge End of Back Channel as indicated. Attach Hinge End of Panic and Hinge End Mounting Bracket LOOSLEY on Hinge side with (2) 12-24*25.4mm Pan Head Thread Cutting Machine Screws

and Lock Washers with 12-24*42.9mm Sex Nuts or (2)#12*31.8mm Pan Head All-Purpose Screws and Lock washers.

 Install (2) 1/4-20 Shoulder Studs on Lock Stile. Position Latch End of Panic over Hex Mounting Studs. Secure with (2) 1/4-20 Hex Nuts and Lock Washers; also with (4) 12-24*25.4mm Pan Head Thread Cutting Machine Screws and Lock Washers with 12-24*42.9mm Sex Nuts or (4)#12*31.8mm Pan Head All-Purpose Screws and Lock Washers. Tighten the (2) screws on the Hinge End Mounting Bracket.

NOTE: If Key Cylinder is used, Cylinder Spindle must be inserted into Coupling Boss prior to

- fastening Latch End on door.
 Attach Latch End Cover and Hinge End Cover with (4) 8-32*12.7mm Flat Head Thread Cutting Machine Screws.
- Place Strike on Lock Jamb as shown, (Centred on Latch). Mark and Drill Jamb for (2) 10-24*19.1mm Pan Head Thread Cutting Machine Screws and Lock Washers or (2)#10*31.8mm Pan Head All Purpose Screws and Lock Washers.
 NOTE: Use Spacers provided if required.

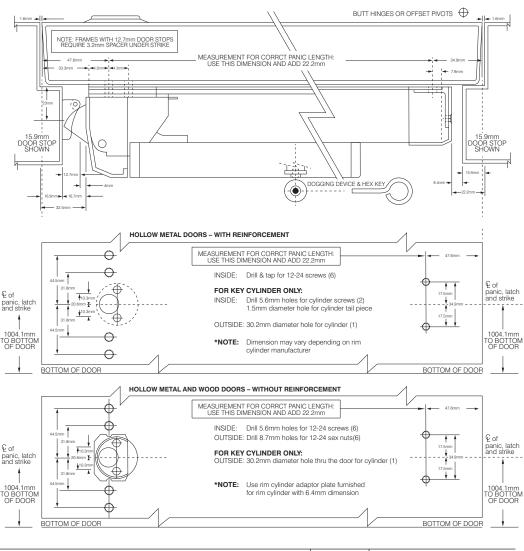

The Parkside Group Ltd The Willow Centre

17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



RIM MOUNTED SOFT TOUCH BAR PR-7300 SERIES

SHEET No.

4:43

SUB TITLE

TITLE

INSTALLATION INSTRUCTIONS. MODERN, FLAT TOUCH BAR, RIM, PANIC EXIT DEVICE ALUMINIUM STOREFRONT DOORS

INSTALLATION INSTRUCTIONS

- 1. Determine hand of door and prepare inside face of Lock and Hinge Stile as shown.
- 2. NOTE: For Key Cylinder Only If key cylinder is to be used, prepare inside and outside face of Lock Stile as shown. Cut spindle of Rim Cylinder to project thru the door 4mm. Install Rim Cylinder and secure with (2) 12-24 Fillister Head Machine Screws. NOTE: Cut off excess Screw length at break-off points as
- required. 3. Measure for correct Panic length. Measure distance from centreline of mounting holes on Lock and Hinge Stiles of door as indicated AND ADD 22.2mm. Mark the measurement on the back of the Panic from Latch End towards the Hinge End to be cut. Stuff a rag in the end of the Back Channel prior to cutting off excess length so that metal chips will not get into the mechanism. Protect the area to be cut and then
- cut to correct length. Drill (2) clearance holes for 12-24 Machine Screws in Hinge End of Back Channel as indicated. Attach Hinge End of Panic and Hinge End Mounting Brack LOOSLEY on Hinge Stile with (2) 12-24*2525.4mm Pan Head Thread Cutting

Machine Screws and Lock Washers or (2) #12-24*25.4mm Pan Head All-purpose Screws and Lock Washers.

 Install (2) 1/4-20 Shoulder Studs on Lock Stile. Position Latch End of Panic over Hex Mounting Studs. Secure with (2) 1/4-20 Hex Nuts and Lock Washers; also with (4) 12-24*25.4mm Pan Head Thread Cutting Machine Screws and Lock Washers or (4) #12*31.8mm Pan head All-Purpose Screws and Lock Washers. Tighten the (2) screws on the Hinge End Mounting Bracket. **NOTE:** If Key Cylinder is used, Cylinder Spindle must be inserted into Coupling Boss




- prior to fastening Latch End on Lock Stile. Attach Latch End Cover and Hinge End Cover with (4) 8-32*12.7mm Flat Head Thread Cutting Machine Screws.
- Place Strike on Lock Jamb as shown, (Centred on Latch). Mark and Drill Jamb for (2) 10-24*19.1mm Pan Head Thread Cutting Machine Screws and Lock Washers or (2)#10*31.8mm Pan Head All Purpose Screws and Lock Washers.
- NOTE: 3.2mm Spacer must be used under Strike on a Frame. Use extra Spacer provided if required.

OPERATING INSTRUCTIONS

TO UNLOCK DOOR USING CYLINDER KEY: Turn key approximately 1/4 turn in either direction and open door, return key to centre and remove. **NOTE:** Cylinder Key WILL NOT dog unit. Dogging is from inside with Hex Dogging Key only.


DOGGING USING DOGGING KEY: Fully depress Touch Bar and hold. Using Hex Dogging Key **push in** Dogging Device and turn **clockwise** approximately 1/2 turn.


TO RELEASE DOGGING KEY DOGGING: Hold Touch Bar down. Using Hex Dogging Key **push in** Dogging Device and turn counterclockwise approximately 1/2 turn. Dogging will be released.

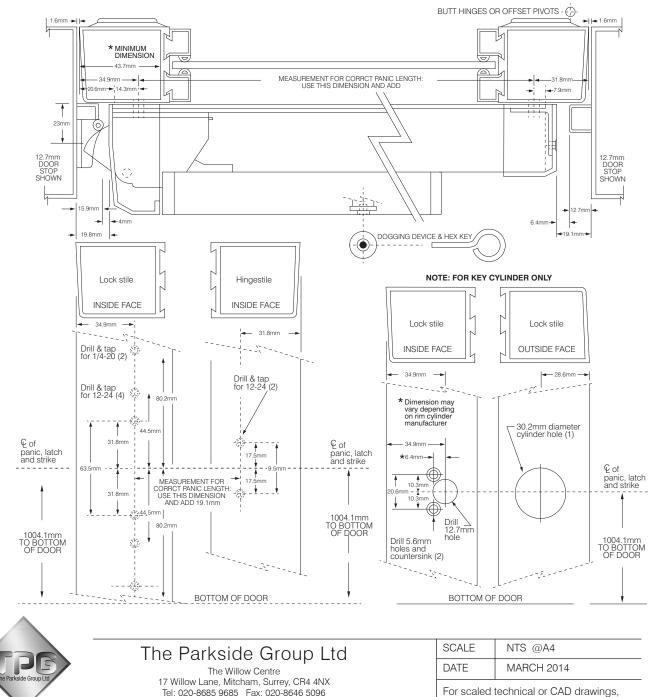

Email: axim@parksidegroup.co.uk

Web Site: www.axim.co.uk

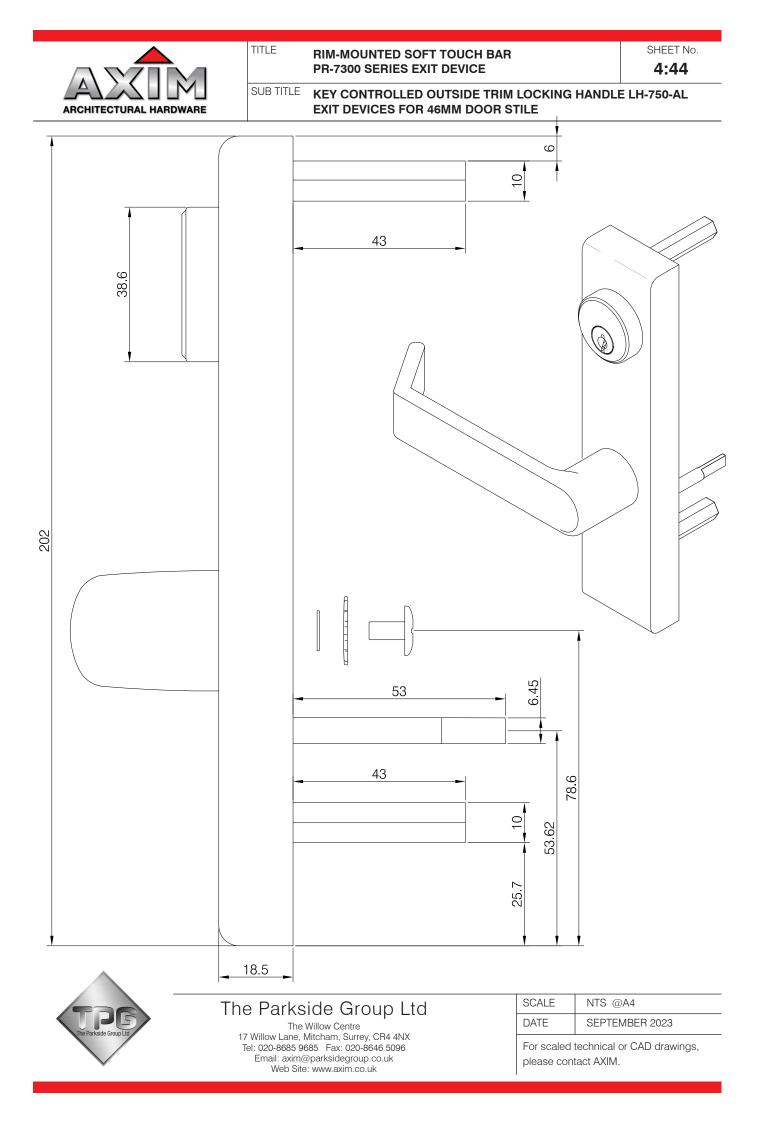

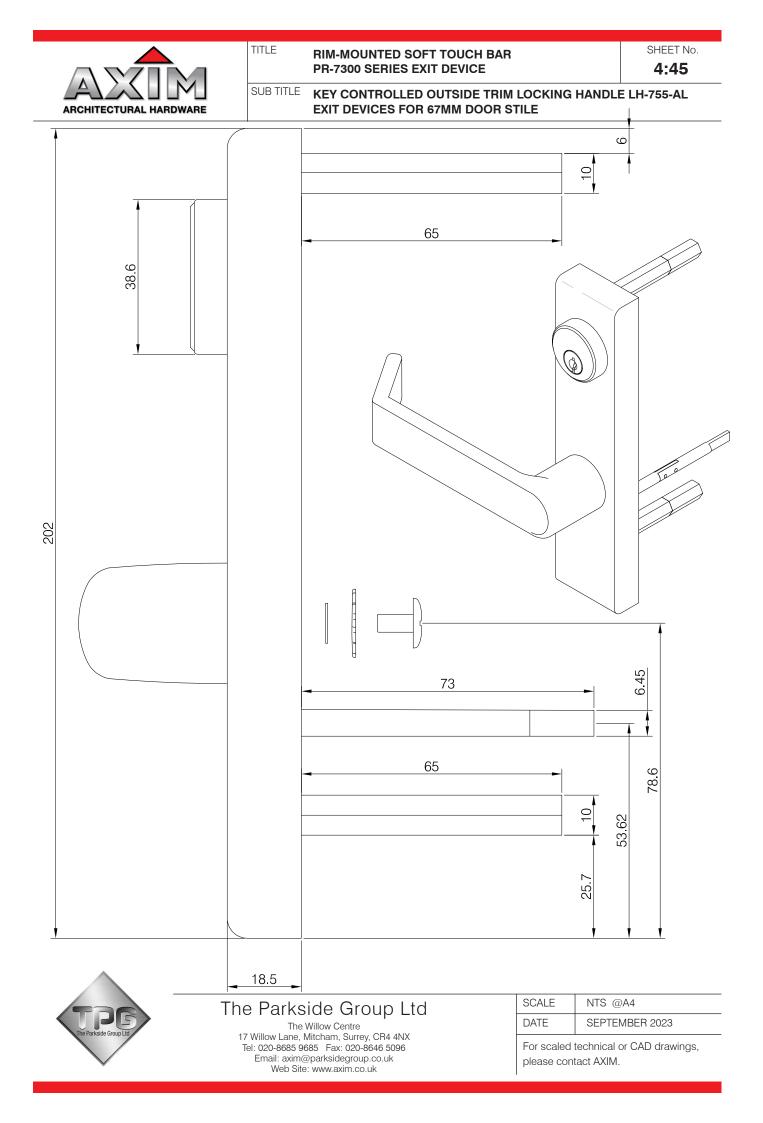



TITLE

SUB TITLE TECHNICAL SUPPORT

Introduction


Axim Emergency Exit Hardware is guaranteed for a period of 12 months from the date of manufacture against defect in material and workmanship. The guarantee is void if the product has been incorrectly installed or damaged in use. The following notes provide information relating to correct specification of hardware and outlines recommended maintenance procedures which should ensure the hardware will operate trouble free for many years.


There are many types of emergency exit devices and this document will cover 3 of those types.

- Emergency exit push handle
- Concealed panic bolt push bar
- Panic Latch push bar.

Some of these types are handed and Fig. 1 explains how to determine the hand. This is most important when quoting hardware and helps eliminate costly mistakes.

Door handing fig.1





Left hand door LHRB

Right hand door RHRB

Emergency exit push handle / push bar with concealed locking rods

The emergency exit push handle comprises a handed push paddle which operates concealed locking rods. This type is designed for use with hollow doors i.e. aluminium, steel or PVCu. It is not suitable for timber doors. The push bar type uses the same internal mechanism which is activated by the full width crash bar. The mechanism may be connected to either housing and therefore the unit is non-handed.

It is important to realise the internal handles are designed to be pushed in an emergency to release the door and although the handles are used to pull the door closed to reset the hardware. They are not intended to be used in high traffic areas where the handles are used to pull doors closed on regular intervals.

If installed correctly the hardware requires little maintenance, however, the following instructions will extend the life of the product if carried out on a regular basis.

Six monthly maintenance

Check that the emergency exit hardware operates and the door can be opened in the correct manner. Ensure the door operates smoothly and carry out routine maintenance as per door manufacturers instructions.

With the door open depress the bar or paddle handle and release, the bolts should remain retracted whilst the door is in this open position.

The top bolt should clear the underside of the transom by no less than 3mm. In most cases this will be level with the top of the door. With the door still open activate the trip mechanism, positioned at the top of the door on the closing face, the bolts should throw immediately.

It is important that the catch operates correctly, especially in the case of fire doors and alarmed door which will otherwise remain ajar or unlocked. If adjustment is necessary remove the screws securing the nylon guide block in place. Take care not to allow it to drop down inside the stile.

Remove the nylon block and lubricate the steel catch until the spring and catch operate freely.

If the bolt position requires height adjustment, turn the bolt head until the correct projection is achieved. Ensure the bolt retracts completely when depressing the panic bar or handle.

Refit the guide block by reverse procedure.

Adjustment to the bottom bolt can be carried out in the same way.

Check the housing to both door stiles for the push bar type or the single housing for the push paddle type. The housings can be removed by slackening the 3 No.15/32" x 1/4" set screws with a 3mm Allen key. The active housing can be removed from the door by sliding out the connecting pin from the actuator pin. This will present the 2 No. shoulder bolts which should be secured firmly. If an outside rim cylinder has also been fitted 2 No. screws should also be visible, check these screws are secure taking care not to over tighten. The operating mechanism can be lubricated with a spray grease through the actuator pin slot and the housing reinstated by reverse procedure.

If faults can not be rectified using the information above contact the supplier for further advice.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2018 |



TITLE

SUB TITLE TECHNICAL SUPPORT

Panic exit latch

The emergency exit panic latch utilises a push bar which operates a latch. This type is designed for use with hollow doors i.e. aluminium, steel or PVCu. For use with timber doors fixing plates must be fabricated to accept the shoulder bolts supplied. The latch type mechanisms are handed and cannot be altered in the field.

It is important to realise the internal handles are designed to be pushed in an emergency to release the door and although the handles are used to pull the door closed to reset the hardware. They are not intended to be used in high traffic areas where the handles are used to pull door closed on regular intervals.

If installed correctly the hardware requires little maintenance, however, the following instructions will extend the life of the product is carried out on a regular basis.

Six monthly maintenance

Check that the emergency exit hardware operates and the door can be opened in the correct manner. Ensure the door operates correctly, without binding and carry out routine maintenance as per door manufacturers instructions.

With the door open, depress the bar and release, the latch bolt should retract fully and return to its normal position. Each housing can be removed by slackening the 3 No. 15/32" x 1/4" set screws with a 3mm Allen Key. With the crash bar still attached lift the unit away from the door.

With a light spray grease lubricate the 2 No. return springs and internal components. Do NOT remove the 2 No. pozi head screws at the top of the unit.

Check the 2 No. shoulder bolts to each door stile and secure if necessary. If the door is furnished with an outside rim cylinder, check to ensure correct operation and lubricate with a light graphite lubricant. Do not use oil.

Reinstate the housings in reverse procedure and tighten the set screws. Lightly oil the pivots through the sides of each housing and wipe clean. Check the bar is fitted tightly between the housings. Apply a light lubricant to the roller on the lock keep and adjust the keep position if necessary. Check fixings are all tight.

If faults can not be rectified using the information above contact the supplier for further advice.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |




FLUSH BOLT 23mm WIDE FB-6200 SERIES

TITLE

5:01

SUB TITLE **TECHNICAL INFORMATION**

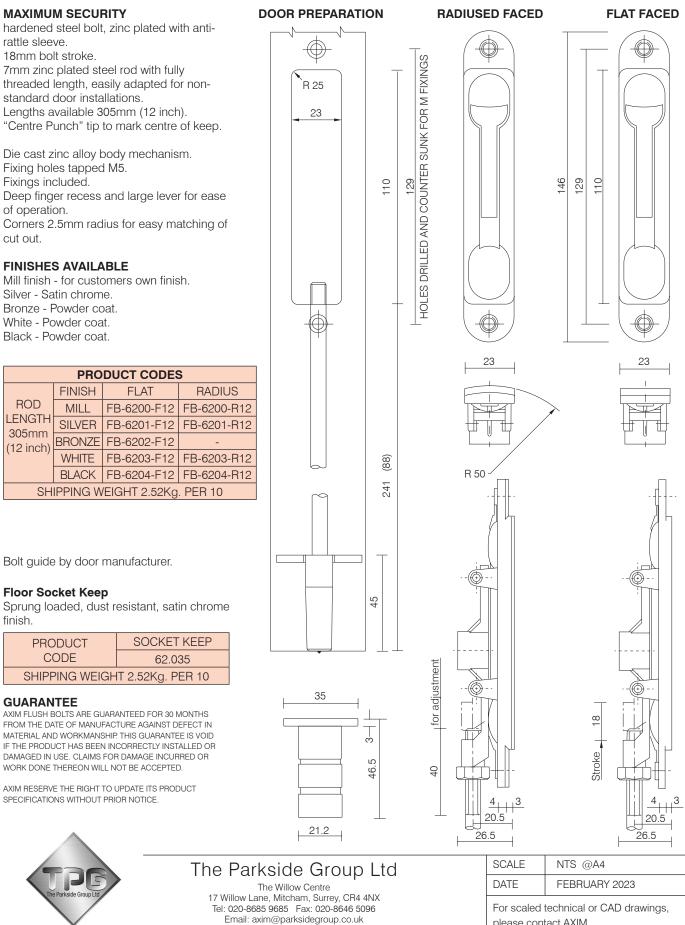

Web Site: www.axim.co.uk

please contact AXIM.



129


TITLE FLUSH BOLT 23mm WIDE **FB-6200 SERIES**

SHEET No.

SUB TITLE **TECHNICAL INFORMATION**

> Use flush bolt guide FB-62-040 to support top of flush bolt

5:02

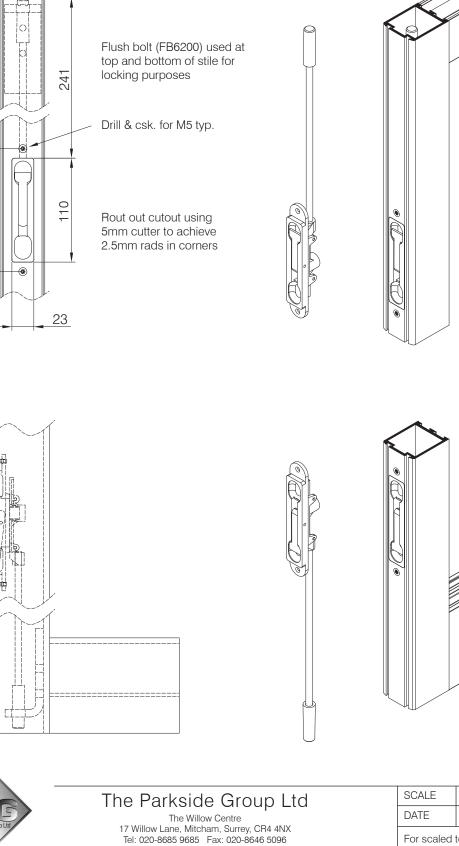

Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

For scaled technical or CAD drawings, please contact AXIM.

NTS @A4

JULY 2017



FLUSH BOLT 25mm WIDE FB-6301 SERIES

SUB TITLE **DETAILS**

TITLE

MAXIMUM SECURITY

hardened steel bolt, zinc plated with antirattle sleeve. 18mm bolt stroke. 7mm zinc plated steel rod with fully threaded length, easily adapted for nonstandard door installations. Lengths available 700mm. "Centre Punch" tip to mark centre of keep.

Die cast zinc alloy body mechanism. Fixing holes tapped M5. Fixings included. Deep finger recess and large lever for ease of operation.

FINISHES AVAILABLE

Mill finish - for customers own finish. Silver - Satin chrome.

| PRODUCT CODES | | | |
|--------------------------------|--------|--------------|--|
| | FINISH | FLAT | |
| LENGTH 700mm | SILVER | FB-6301-F28* | |
| SHIPPING WEIGHT 3.86Kg. PER 10 | | | |

*SPECIAL ORDER ONLY. NON-STOCK ITEM

Bolt guide by door manufacturer.

Floor Socket Keep


Sprung loaded, dust resistant, satin chrome finish.

| PRODUCT | SOCKET KEEP | |
|--------------------------------|-------------|--|
| CODE | 62.035 | |
| SHIPPING WEIGHT 2.52Kg. PER 10 | | |


GUARANTEE


AXIM FLUSH BOLTS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.



o 8.5

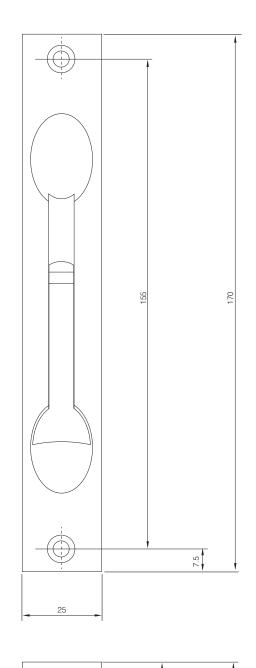



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |



FLUSH BOLT 20mm WIDE **FB-6401 SERIES**

TITLE

SUB TITLE DETAILS

MAXIMUM SECURITY

hardened steel bolt, zinc plated with antirattle sleeve. 18mm bolt stroke. 7mm zinc plated steel rod with 30mm thread length, easily adapted for nonstandard door installations. Lengths available 110mm & 230mm. "Centre Punch" tip to mark centre of keep.

Die cast zinc alloy body mechanism. Fixing holes tapped M5. Fixings included. Deep finger recess and large lever for ease of operation.

FINISHES AVAILABLE

Mill finish - for customers own finish. Silver - Satin chrome.

| PRODUCT CODES | | |
|--------------------------------|--------|---------------|
| | FINISH | FLAT |
| LENGTH 110mm | SILVER | FB-6401-F045* |
| SHIPPING WEIGHT 1.72Kg. PER 10 | | |
| PRODUCT CODES | | |
| P | RODUCT | ODES |
| | FINISH | FLAT |
| LENGTH 230mm | | |

*SPECIAL ORDER ONLY. NON-STOCK ITEM

Bolt guide by door manufacturer.

Floor Socket Keep


Sprung loaded, dust resistant, satin chrome finish.


| PRODUCT | SOCKET KEEP | |
|--------------------------------|-------------|--|
| CODE | 62.035 | |
| SHIPPING WEIGHT 2.52Kg. PER 10 | | |


GUARANTEE

AXIM FLUSH BOLTS ARE GUARANTEED FOR 30 MONTHS FROM THE DATE OF MANUFACTURE AGAINST DEFECT IN MATERIAL AND WORKMANSHIP. THIS GUARANTEE IS VOID IF THE PRODUCT HAS BEEN INCORRECTLY INSTALLED OR DAMAGED IN USE. CLAIMS FOR DAMAGE INCURRED OR WORK DONE THEREON WILL NOT BE ACCEPTED.

AXIM RESERVE THE RIGHT TO UPDATE ITS PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.

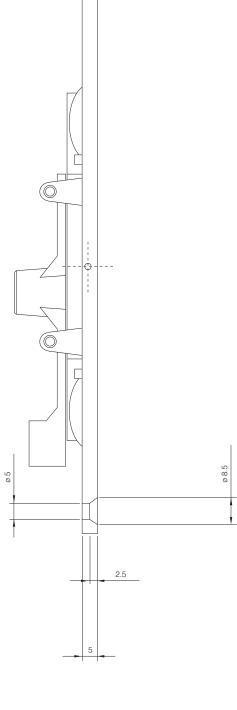

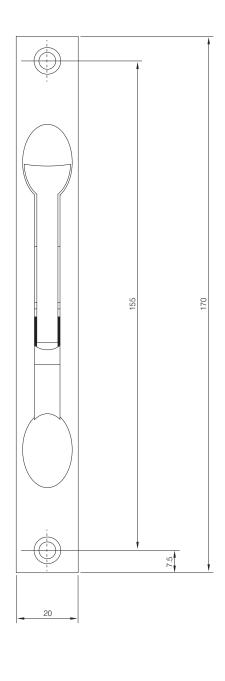




The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE NTS @A4 DATE JULY 2017




SUB TITLE ANNOTATED DETAILS

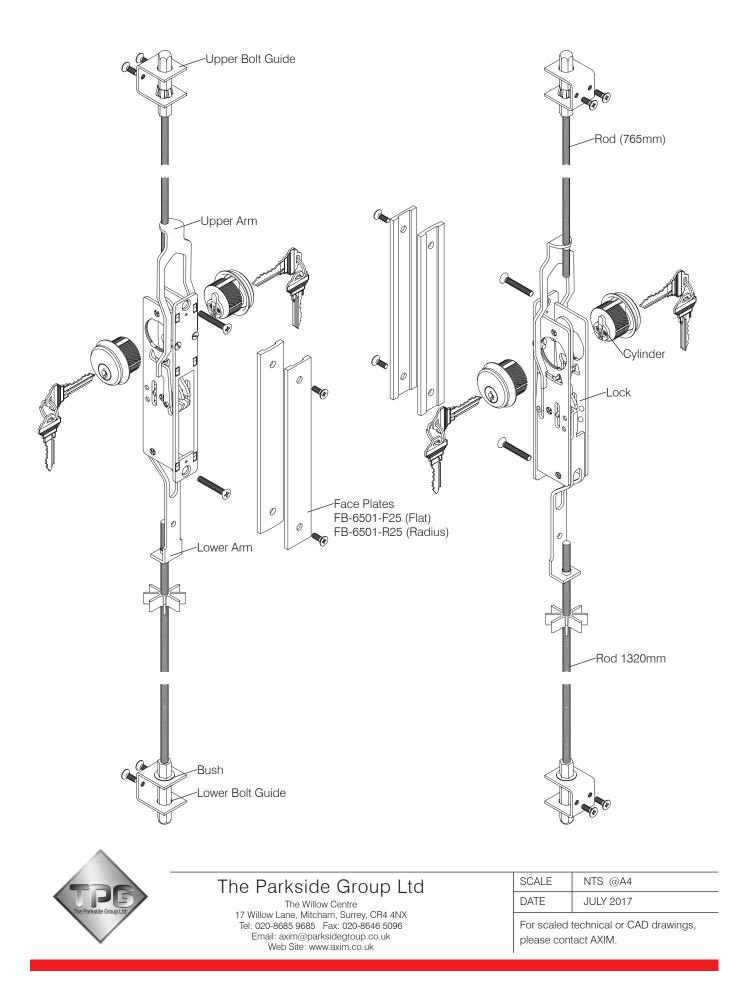

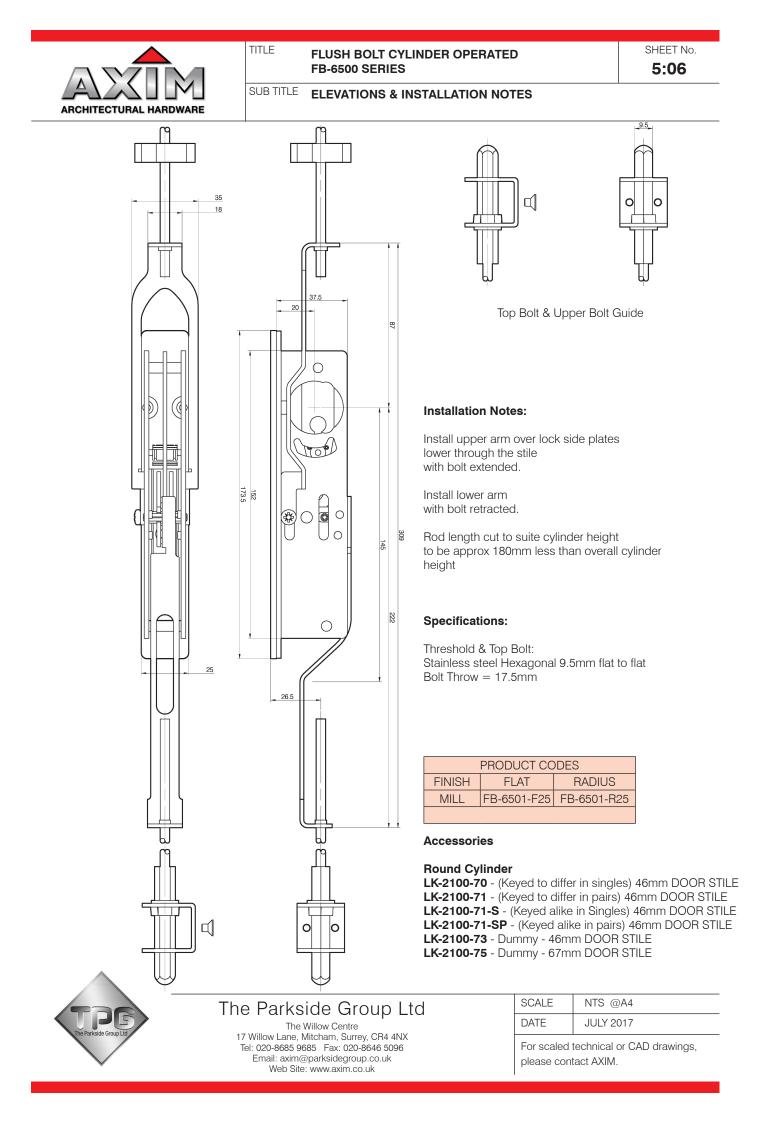



SUB TITLE TECHNICAL INFORMATION

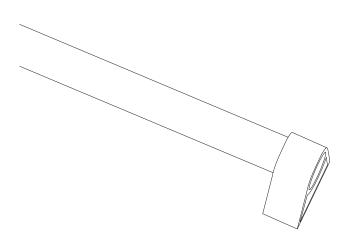

Series HD80

Full height tubular handle sets for use with aluminium, steel and solid timber doors comprising:-

2 No. tubes, 2500mm long

4 No. brackets complete with studs, dome nuts and washers

Extruded aluminium tubes have an outside diameter of 40mm and an inside diameter of 30mm giving a wall thickness of 5mm for minimum deflection even in high traffic areas.

Tubes can be cut to suit requirements after door height has been determined.

Extruded aluminium brackets also have a minimum wall thickness of 5mm for rigidity and are capped to conceal the ends of the tubes.

Each bracket is 85mm wide and 39mm high with a projection of 90mm from the door leaf.

Brackets are drilled to accept the 10mm threaded stud for fixing and drilled and tapped for the M5 grub screws that hold the tube firmly in position eliminating rattle.

Finishes

Tube handle sets are available ex-stock in the following finishes:-


Satin silver aluminium anodised


White polyester powder coated

Mill finish for customers own treatment

Special colours are obtainable to special order. Please contact Sales Office for information.

AXIM reserve the right to update its product specification without prior notice.








The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



SUB TITLE **TECHNICAL INFORMATION**

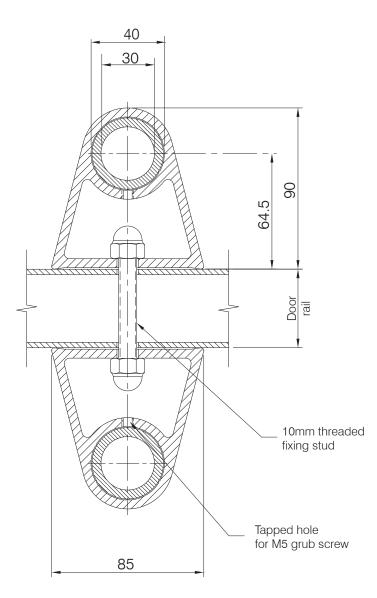



The Parkside Group Ltd The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



TITLE

SUB TITLE INTENTIONALLY BLANK





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2021 |



TITLE

SUB TITLE INTENTIONALLY BLANK






The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2021 |



| TITLE | EXTRUDED ALUMINIUM PAD HANDLE SET HD-90 SERIES | SHEET No. 6:05 |
|-----------|---|-------------------|
| SUB TITLE | TECHNICAL INFORMATION | |
| | 230mm PULL HANDLE WITH 110mm SPACED HOLES | |



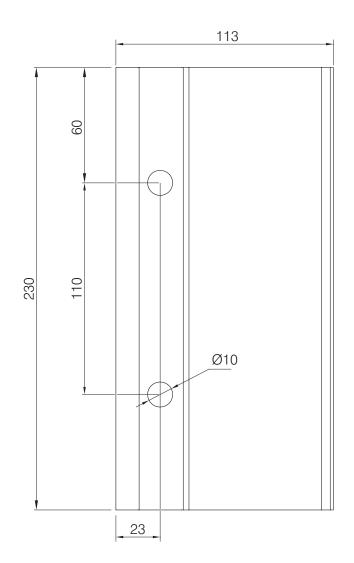





The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



| TITLE | EXTRUDED ALUMINIUM PAD HANDLE SET HD-92 SERIES | SHEET No. 6:06 |
|-----------|---|--------------------------|
| SUB TITLE | 300mm PULL HANDLE WITH 110mm SPACED HOLES HD-092 | |

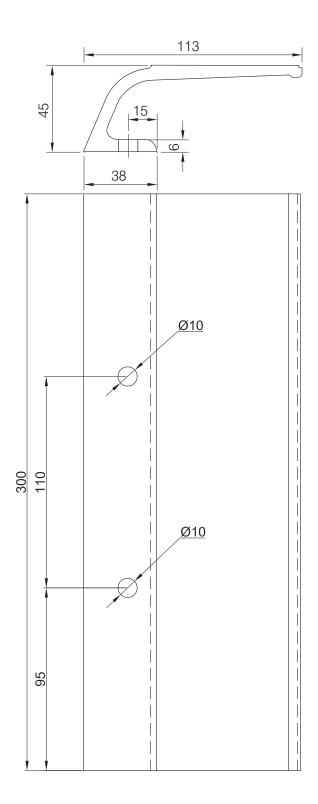


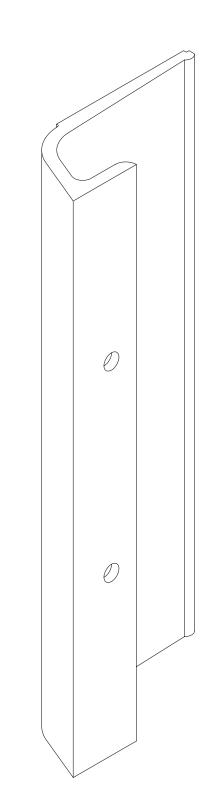





The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |

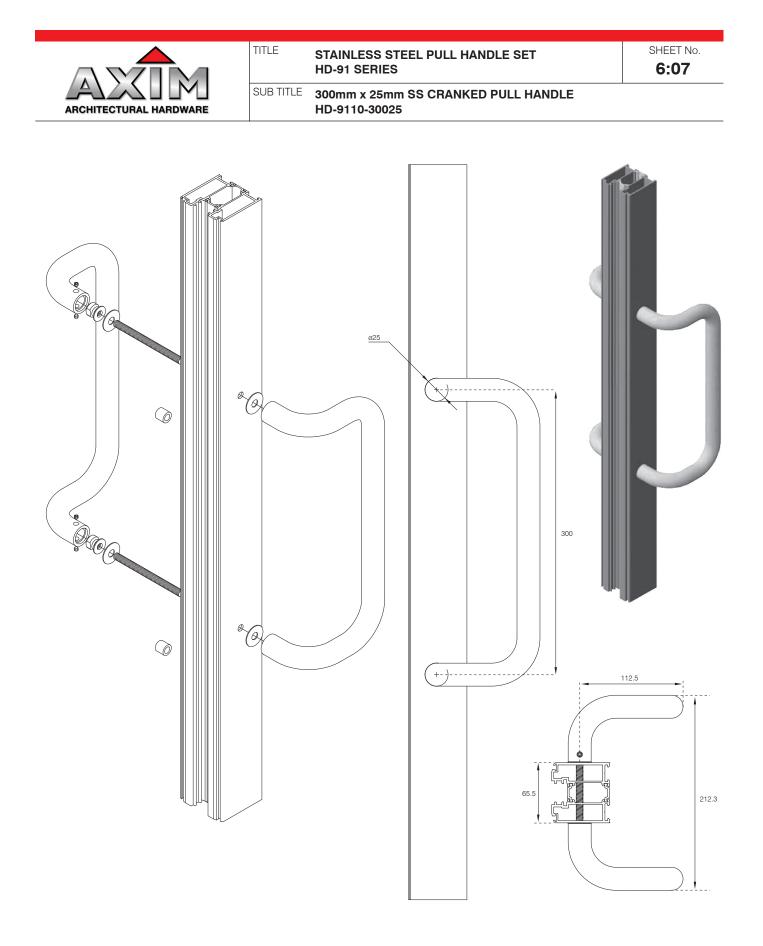

| | The Parkside Group Ltd | SCALE | NTS @A4 | |
|----------------------|---|-------|--|--|
| | The Willow Centre | DATE | AUGUST 2016 | |
| THE FAILSUE GLUDP LU | Free site excises One and existence was a state | | For scaled technical or CAD drawings, please contact AXIM. | |

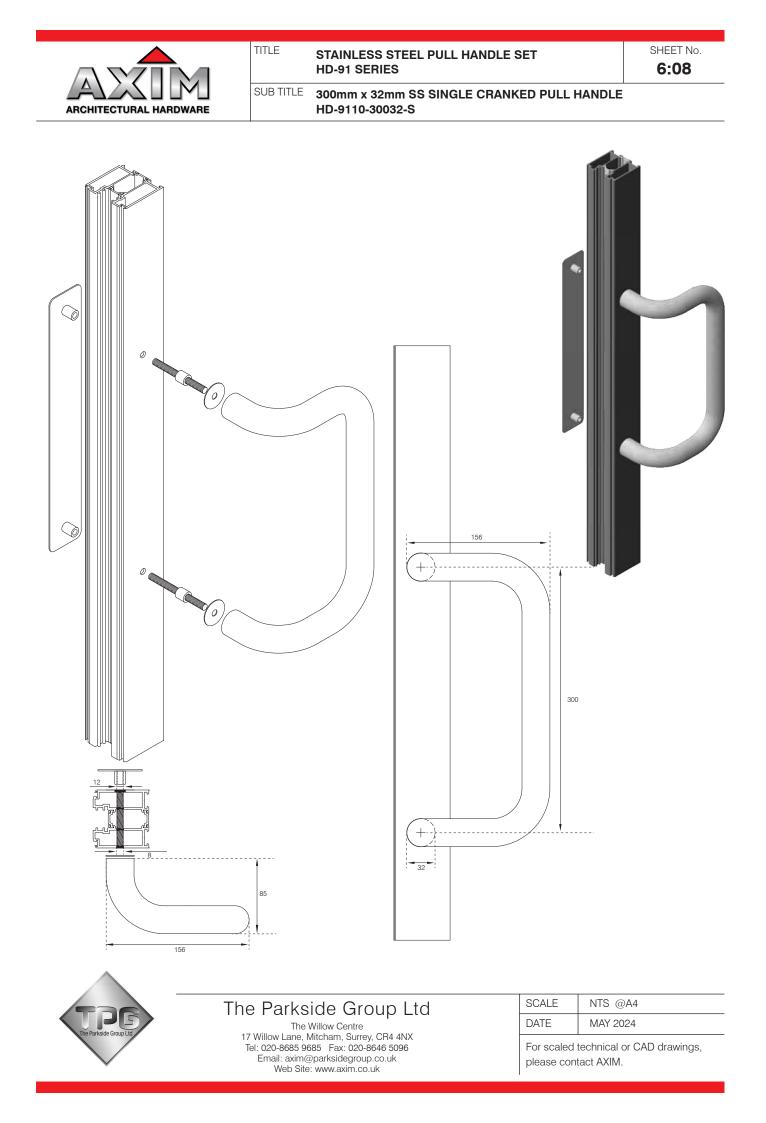


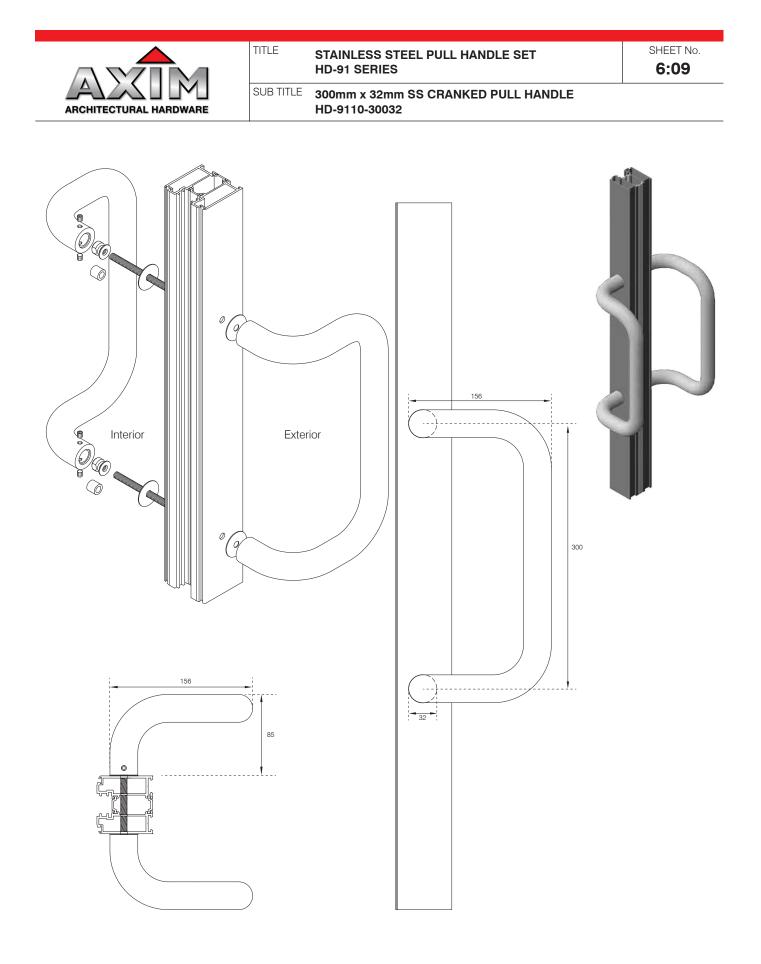


| TPG The Parkside Group Ltd |
|-------------------------------|
| \sim |

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |

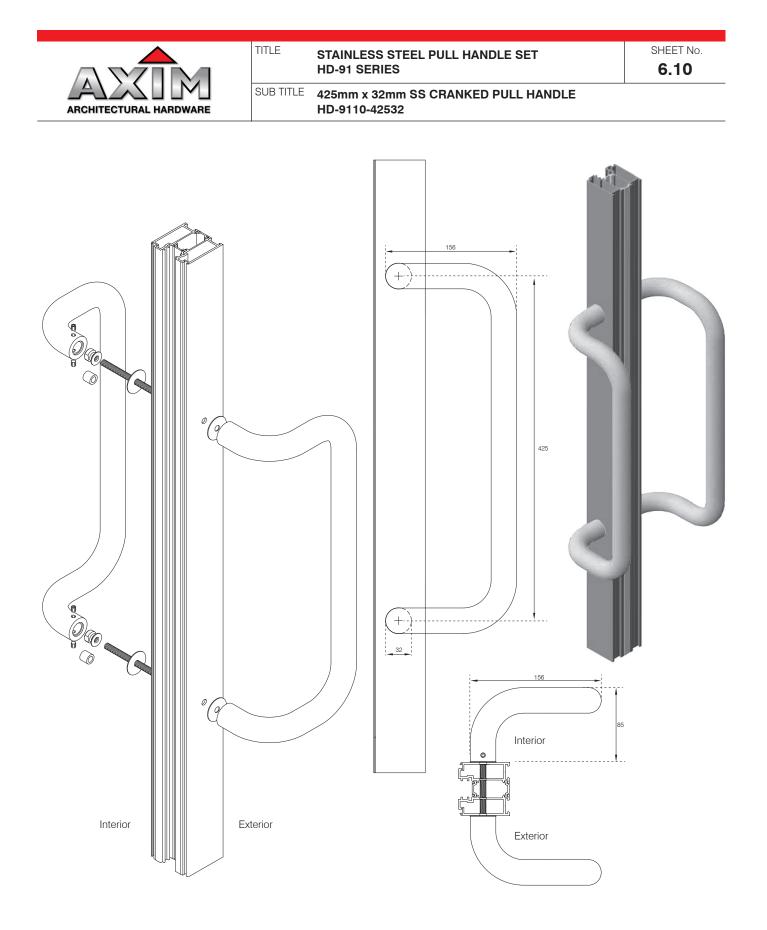


| | The Parkside Group Ltd | SCALE | NTS @A4 |
|------------------------|---|-------|--|
| The Parkside Group Ltd | The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk | DATE | MAY 2024 |
| | | | For scaled technical or CAD drawings, please contact AXIM. |

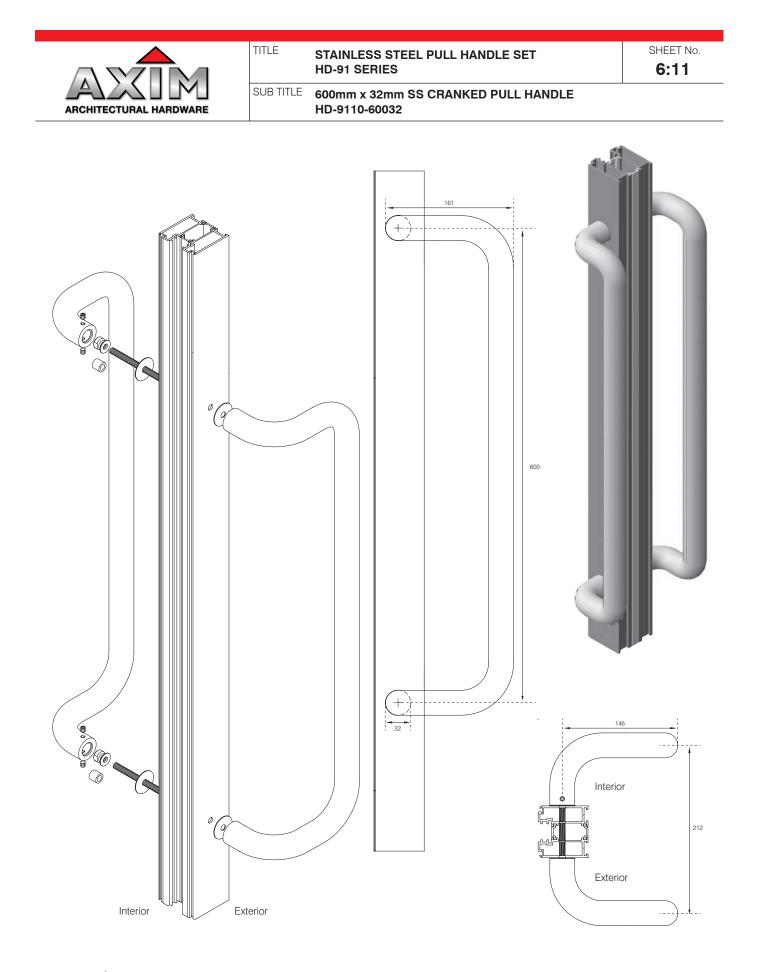



The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2016 |

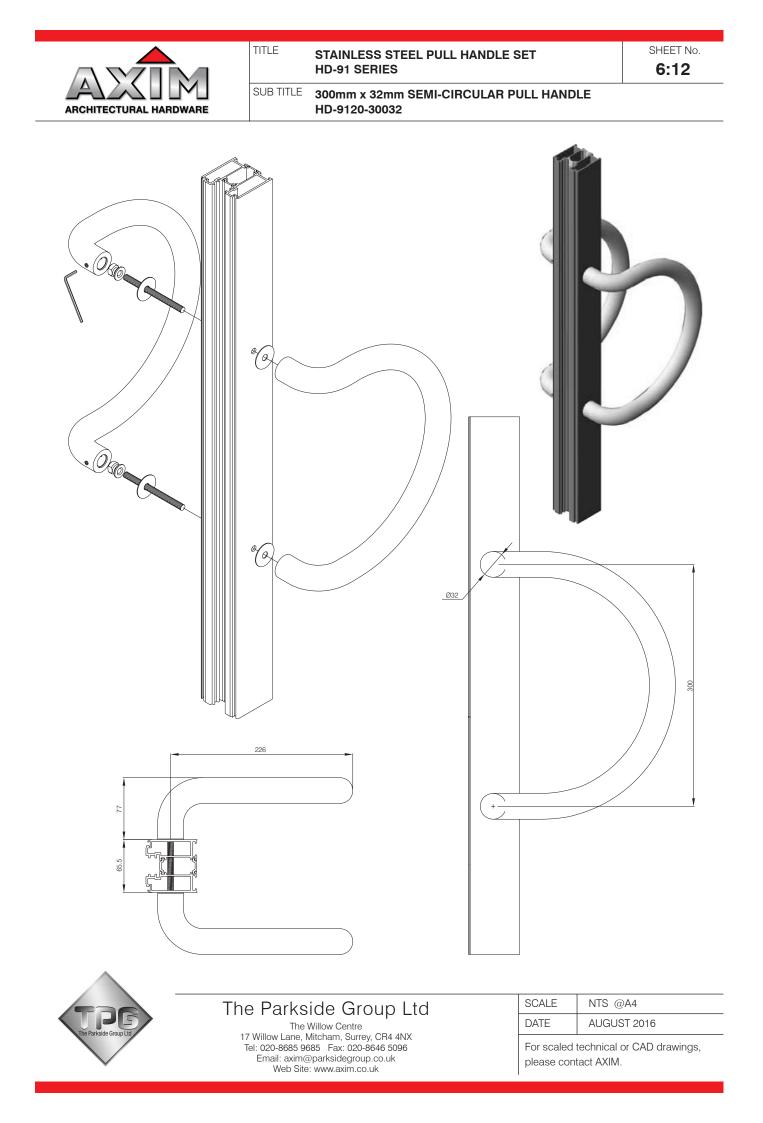



Q70

Ø

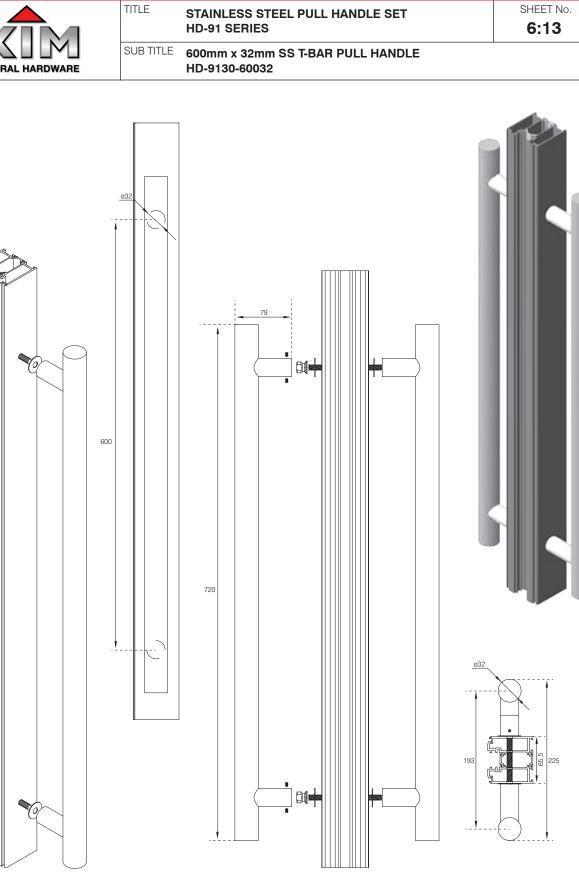



È6

Ø


The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |



Ì

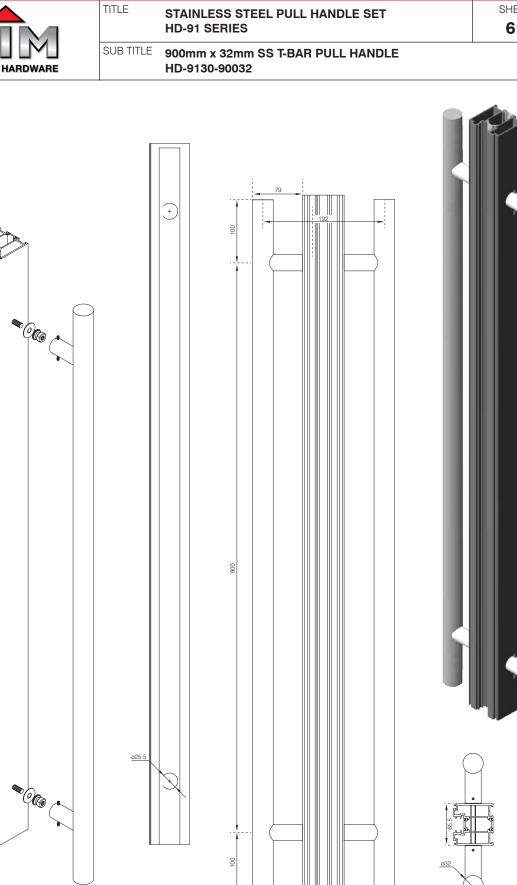



D

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |

For scaled technical or CAD drawings, please contact AXIM.

SHEET No.


6:14



STAINLESS STEEL FLUSH PULL HANDLE HD-48 SERIES


SHEET No. 6:15


SUB TITLE HD48 FLUSH PULL HANDLE




TITLE

Route hole 96 x 35mm using Ø5mm cutter. Use 4mm self-tapping screws @ 105mm centres to secure stile.a

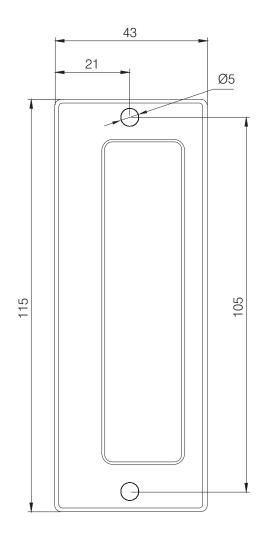





Product code: HD048XSSS

| TPP5 The Parkside Group Ltd |
|--------------------------------|
|--------------------------------|

The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-----------|
| DATE | JULY 2017 |



TITLE STAINLESS STEEL HANDLES HD-8200 AND HD-9000 SERIES

SUB TITLE TECHNICAL INFORMATION

Stainless Steel Door Handles

The main material used for the production of the Entrance handles is SUS316 material and are ideally specified for use on external door applications this material is ideally suited to heavy duty locations where the integrity of the material is a critical factor, this stainless steel is particularly good against corrosion.

However, the corrosion resistance of any stainless steel door handle is largely dependent on how clean the handle is kept. Stainless steel is not stain free ! Any contamination of the surface will impair the action of the material and can affect the surface appearance of the product.

Stainless steel is well known for its inherent corrosion resistance. The corrosion resistance of stainless steel is due to a passive film of chromium-rich oxide (caused by a reaction between the chromium in the stainless steel with the oxygen in the air). If the surface is not regularly cleaned, surface deposits will prevent the passivation process.

Therefore to retain the highest corrosion resistance and aesthetic appeal it is necessary to keep the surface of stainless steel clean.

Regular and frequent cleaning of stainless steel door handles is therefore key to preserving their appearance. For best results use a clean cloth and warm water with a mild detergent. Should any stains remain, we recommend using mild, non-scratching /abrasive Cleaner (typical household Stainless Steel Cleaning Solutions will be fine).

Dilute in warm water if needed and apply with sponges, cloths or Soft brushes. For harsher stains, a drop of vinegar in addition may help.

Please DO NOT use carbon steel brushes / carbon steel wool as these may leave particles embedded in the surface of the door handle, which can in turn show as rust.

Please note the use of scouring pads will remove the top layer of the material and will affect the Brushed appearance of the handle .

After correct cleaning of the handle, rinse in clean hot water and dry completely with a towel.

We recommend cleaning at least once a month, In areas where the products are used more frequently or exposed to more extreme atmospheric conditions the cleaning routine should be increased to at least once a week. If the stainless steel begins to discolour, either the cleaning regime is inadequate or in the case of swimming pool areas the environment could have deteriorated.

Harsh environments such as Swimming Pools, Coastal / Offshore application or high pollution areas will require a more regular cleaning regime.

If Spots appear on the surface of the product it will not be due to the stainless steel material but will be due to impurities in the surrounding water / air or indeed to external particles that have fallen onto the surface of the product, please also ensure sufficient cleaning has taken place because if there are any cleaning agents that have not been thoroughly removed from the surface it can also create this appearance.

These Spots can be removed with non abrasive cleaners that are specifically suitable for Stainless Steel material.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2016 |



TECHNICAL INFORMATION

Window Handles

A matching suite of handles in the most popular finishes;







43

10

38

10








Polished Chrome

Black White Silver Matching fixing covers and keys supplied with each window handle. Certified to Grade 4 BSEN1670 - Durability

Espagnolette Handles

- Push button, key locking.
- Offset cranked handle either R/Hand or L/Hand
- Matching handle option, straight inline nonhanded
- · Concealed fixing with colour matched cap
- Spindle lengths 10mm, 20mm and 30mm







Cockspur Handle


- Cockspur handles for open out casement windows.
- Push button, key locking.
- Either R/Hand or L/Hand
- 9mm Spur height
- 38mm x 58mm fixing centres.
- · Concealed fixing with colour matched cap

Tilt Turn Handle

Turn lock handles for tilt/turn, open in windows. • Key locking, with 3 functions, fully locked,

- restricted tilt only mode or side hung open in
- Non handed

· Small rose with concealed fixing and colour matched cap





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |

For scaled technical or CAD drawings, please contact AXIM.

Offset



TITLE WH - WINDOW HANDLES ESPAGNOLETTE, COCKSPUR & TILT TURN SHEET No.

6:18

SUB TITLE TECHNICAL INFORMATION

Window Handles

Product Codes:

| Espagnolette Handles | | |
|----------------------|-------------------------------|--|
| Producr Code | Description | |
| WH001ANTH | Espag Handle 20mm Spindle L/H | |
| WH001BSVR | Espag Handle 20mm Spindle L/H | |
| WH001DBLK | Espag Handle 20mm Spindle L/H | |
| WH001PCHR | Espag Handle 20mm Spindle L/H | |
| WH002ANTH | Espag Handle 20mm Spindle R/H | |
| WH002BSVR | Espag Handle 20mm Spindle R/H | |
| WH002DBLK | Espag Handle 20mm Spindle R/H | |
| WH002EWHT | Espag Handle 20mm Spindle R/H | |
| WH002PCHR | Espag Handle 20mm Spindle R/H | |
| WH003ANTH | Espag Handle 10mm Spindle L/H | |
| WH003BSVR | Espag Handle 10mm Spindle L/H | |
| WH003DBLK | Espag Handle 10mm Spindle L/H | |
| WH003EWHT | Espag Handle 10mm Spindle L/H | |
| WH003PCHR | Espag Handle 10mm Spindle L/H | |
| WH004ANTH | Espag Handle 10mm Spindle R/H | |
| WH004BSVR | Espag Handle 10mm Spindle R/H | |
| WH004DBLK | Espag Handle 10mm Spindle R/H | |
| WH004EWHT | Espag Handle 10mm Spindle R/H | |
| WH004PCHR | Espag Handle 10mm Spindle R/H | |
| WH005ANTH | Espag Handle 30mm Spindle L/H | |
| WH005BSVR | Espag Handle 30mm Spindle L/H | |
| WH005DBLK | Espag Handle 30mm Spindle L/H | |
| WH005EWHT | Espag Handle 30mm Spindle L/H | |
| WH005PCHR | Espag Handle 30mm Spindle L/H | |
| WH006ANTH | Espag Handle 30mm Spindle R/H | |
| WH006BSVR | Espag Handle 30mm Spindle R/H | |
| WH006DBLK | Espag Handle 30mm Spindle R/H | |
| WH006EWHT | Espag Handle 30mm Spindle R/H | |
| WH006PCHR | Espag Handle 30mm Spindle R/H | |

| Inline Espagnolette Handles | | |
|-----------------------------|---------------------------------|--|
| Producr Code | Description | |
| WH010ANTH | Inline Espag Handle 7016 10mm | |
| WH010BSVR | Inline Espag Handle Silver 10mm | |
| WH010DBLK | Inline Espag Handle Black 10mm | |
| WH010EWHT | Inline Espag Handle White 10mm | |
| WH010PCHR | Inline Espag Handle P/C 10mm | |
| WH011ANTH | Inline Espag Handle 7016 20mm | |
| WH011BSVR | Inline Espag Handle Silver 20mm | |
| WH011DBLK | Inline Espag Handle Black 20mm | |
| WH011EWHT | Inline Espag Handle White 20mm | |
| WH011PCHR | Inline Espag Handle P/C 20mm | |
| WH012ANTH | Inline Espag Handle 7016 30mm | |
| WH012BSVR | Inline Espag Handle Silver 30mm | |
| WH012DBLK | Inline Espag Handle Black 30mm | |
| WH012EWHT | Inline Espag Handle White 30mm | |
| WH012PCHR | Inline Espag Handle P/C 30mm | |

| Cockspur Handles | |
|------------------|-------------------------|
| Producr Code | Description |
| WH007ANTH | Cockspur Handle 9mm L/H |
| WH007BSVR | Cockspur Handle 9mm L/H |
| WH007DBLK | Cockspur Handle 9mm L/H |
| WH007EWHT | Cockspur Handle 9mm L/H |
| WH007PCHR | Cockspur Handle 9mm L/H |
| WH008ANTH | Cockspur Handle 9mm R/H |
| WH008BSVR | Cockspur Handle 9mm R/H |
| WH008DBLK | Cockspur Handle 9mm R/H |
| WH008EWHT | Cockspur Handle 9mm R/H |
| WH008PCHR | Cockspur Handle 9mm R/H |

| Tilt Turn Handles | | |
|-------------------|-------------------------|--|
| Producr Code | Description | |
| WH009ANTH | Tilt/Turn Handle 7016 | |
| WH009BSVR | Tilt/Turn Handle Silver | |
| WH009DBLK | Tilt/Turn Handle Black | |
| WH009EWHT | Tilt/Turn Handle White | |
| WH009PCHR | Tilt/Turn Handle Chrome | |



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk



DH - DOOR HANDLES LEVER LEVER SUB TITLE

TECHNICAL INFORMATION

TITLE


Door Handles

A matching suite of handles in the most popular finishes;

Matching fixing covers and keys supplied with each door handle. Certified to Grade 4 BSEN1670 – Durability

Lever Lever Door Handle

- Euro cylinder machined
- Non-handed
- 240mm long backplate with 216mm fixing centres
- Handle to lock centre 92mm
- Sprung handles to eliminate lever drop
- 2 sets of Fixings supplied 92mm and 85mm long
- 1 x 8mm x 130mm spindle

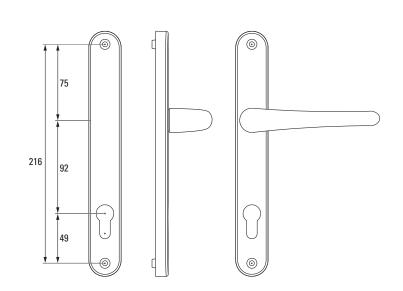

| Lever Lever Door Handles | |
|--------------------------|-------------------------------|
| Producr Code | Description |
| DH001ANTH | L/L Door Handle Grey 7016 |
| DH001BSVR | L/L Door Handle silver |
| DH001DBLK | L/L Door Handle Black |
| DH001EWHT | L/L Door Handle White |
| DH001PCHR | L/L Door Handle Polish Chrome |





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |







The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk


| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |



TITLE MORTICE HOOK LOCK LK-1800 SERIES

SHEET No. 7:01

SUB TITLE 25mm BACKSET EURO PROFILE

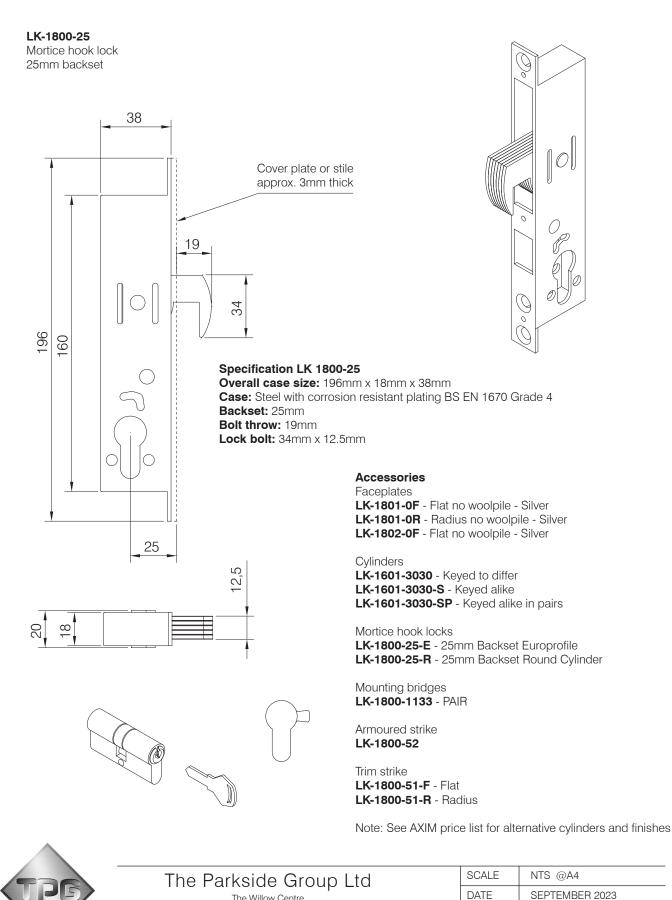

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk




MORTICE HOOK LOCK LK-1800 SERIES

TITLE

SHEET No. 7:02

SUB TITLE 30mm BACKSET EURO PROFILE

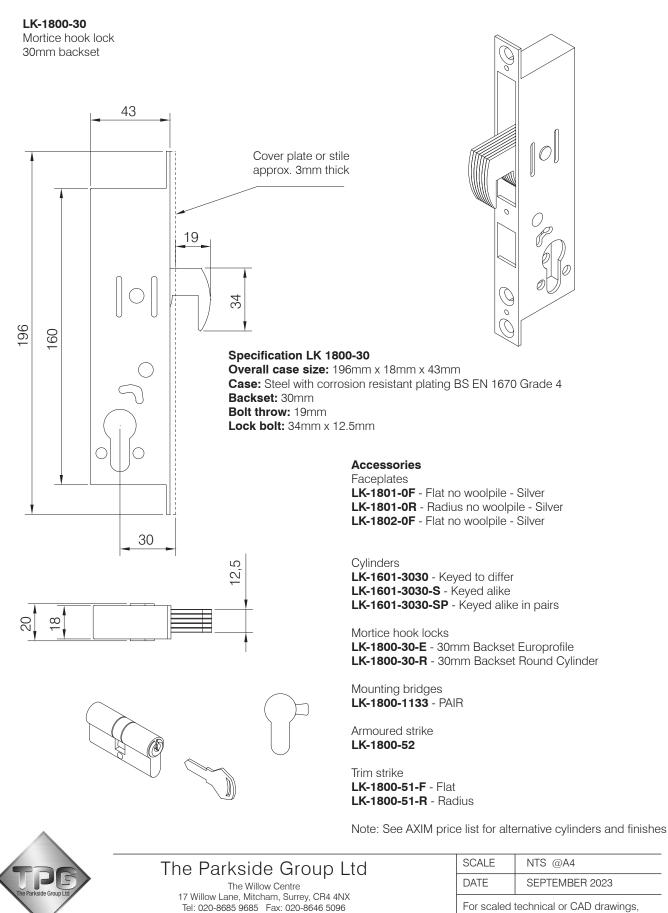

Email: axim@parksidegroup.co.uk


Web Site: www.axim.co.uk



TITLE MORTICE HOOK LOCK LK-1800 SERIES

SHEET No. 7:03

SUB TITLE 40mm BACKSET EURO PROFILE

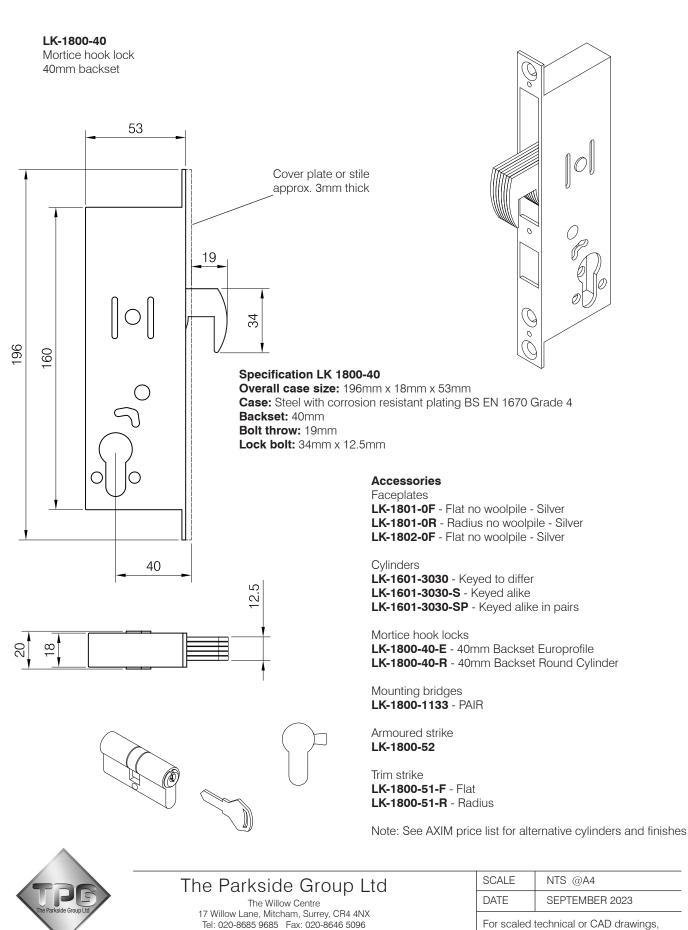

Email: axim@parksidegroup.co.uk

Web Site: www.axim.co.uk

please contact AXIM.




MORTICE HOOK LOCK LK-1800 SERIES

SUB TITLE


TITLE

30mm BACKSET RIV NUT FIXING EURO PROFILE

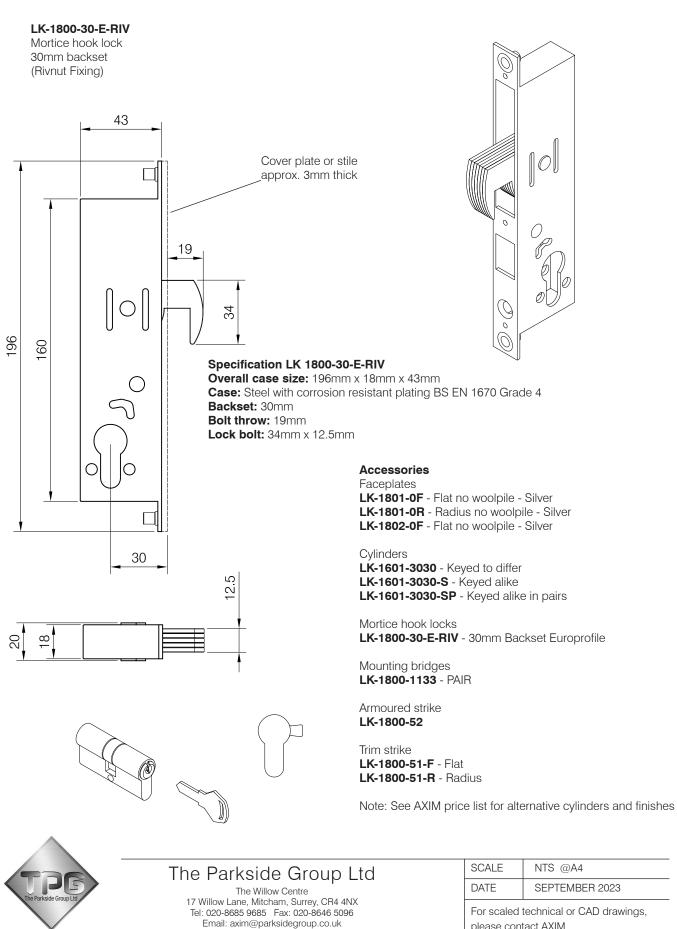


Web Site: www.axim.co.uk

please contact AXIM.

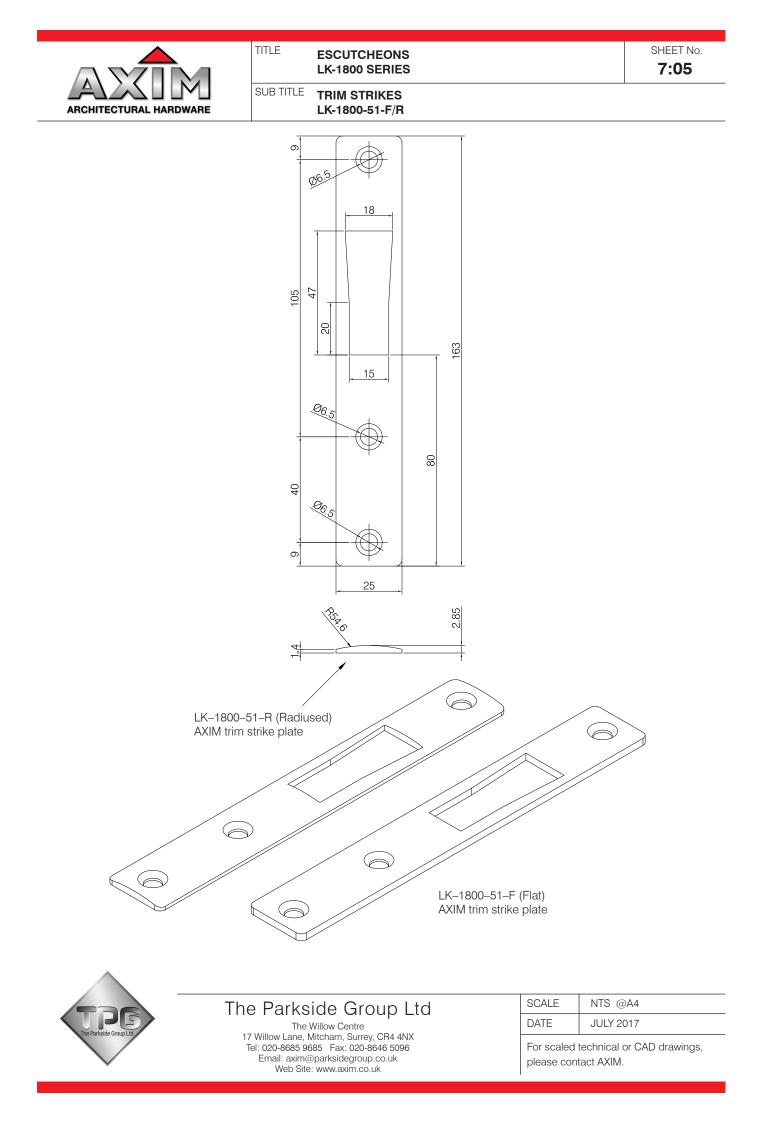

| ARCHITECTURAL HARDWARE | TITLE | ESCUTCHEONS LK-1800 SERIES | SHEET No. 7:06 |
|------------------------|-----------|-------------------------------|--------------------------|
| | SUB TITLE | ARMOURED STRIKE LK-1800-52 | |

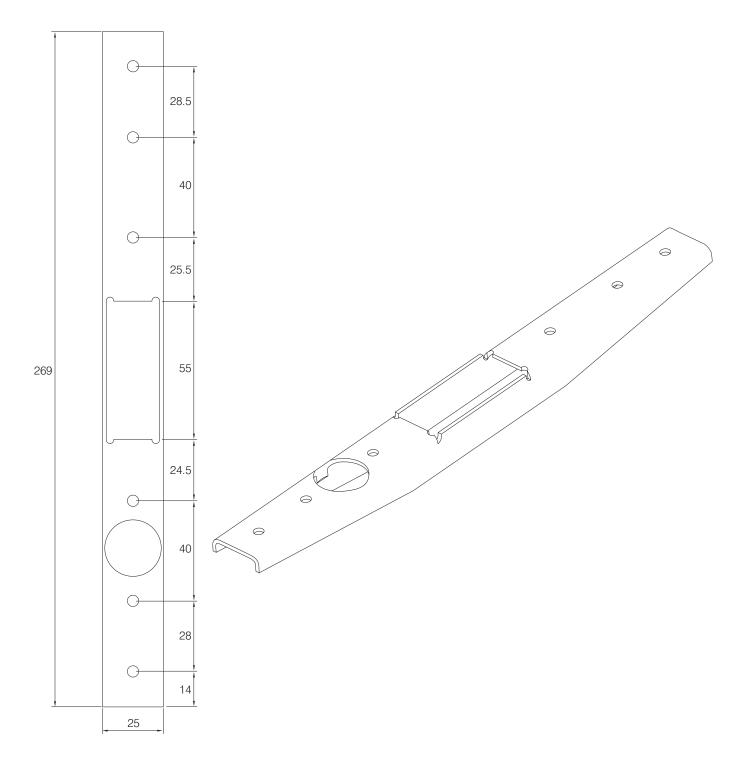



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |



| DEADLATCH FACE PLATE |
|----------------------|
| LK-2100 SERIES |

SHEET No. 7:07

SUB TITLE INTENTIONALLY BLANK

TITLE





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |



| TITLE | DEADLATCH FACE PLATE |
|-------|----------------------|
| | LK-2100 SERIES |

SHEET No. 7:08

SUB TITLE INTENTIONALLY BLANK







The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |

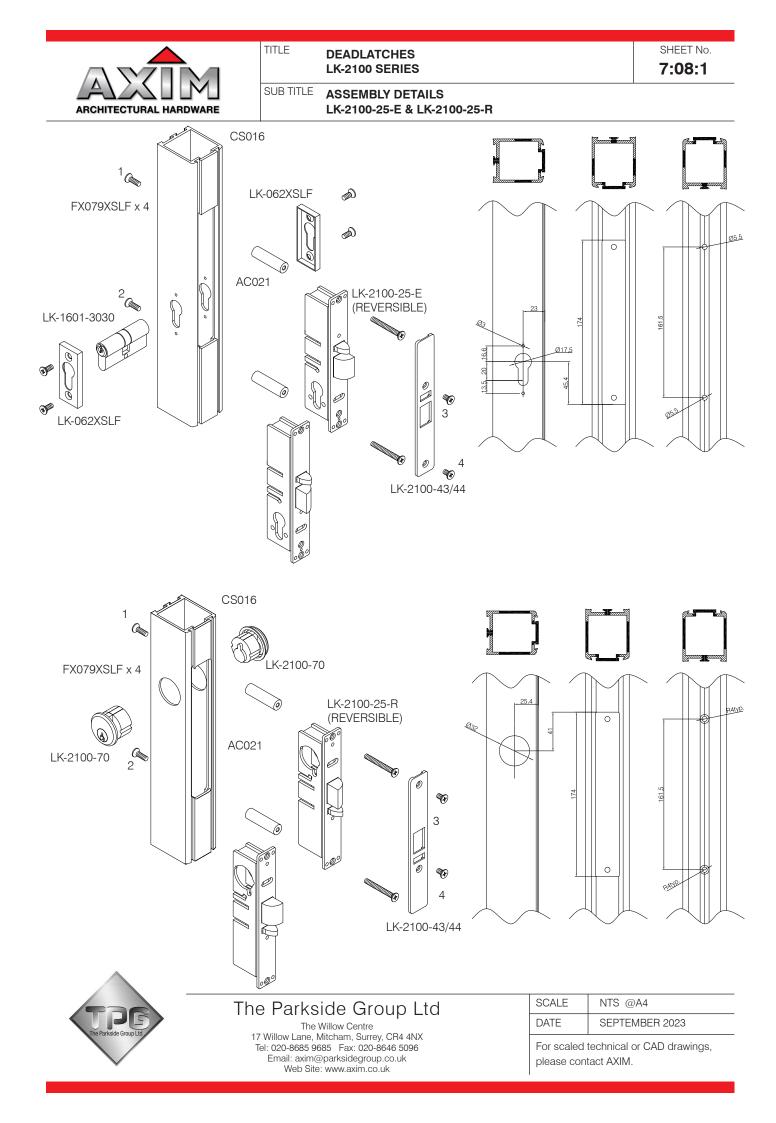

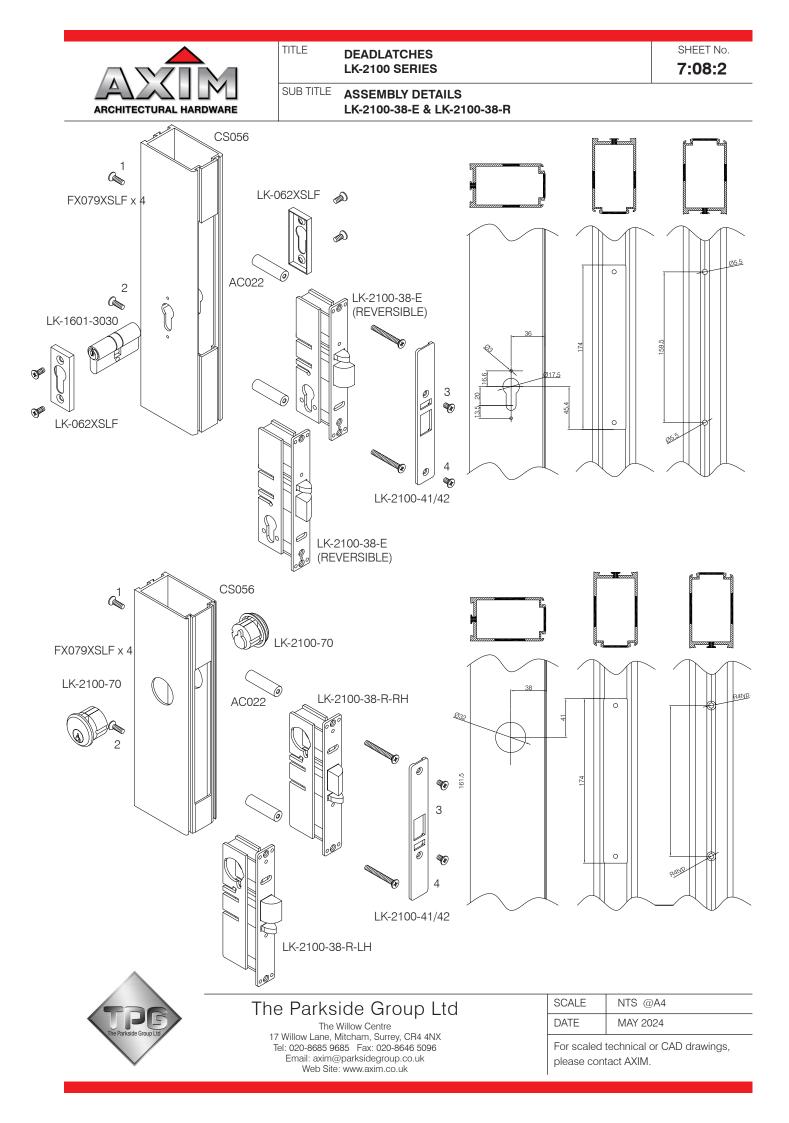




TITLE DEADLATCH FACE PLATE LK-2100 SERIES

SHEET No. 7:09

SUB TITLE FACE PLATE LK-2100-41/42

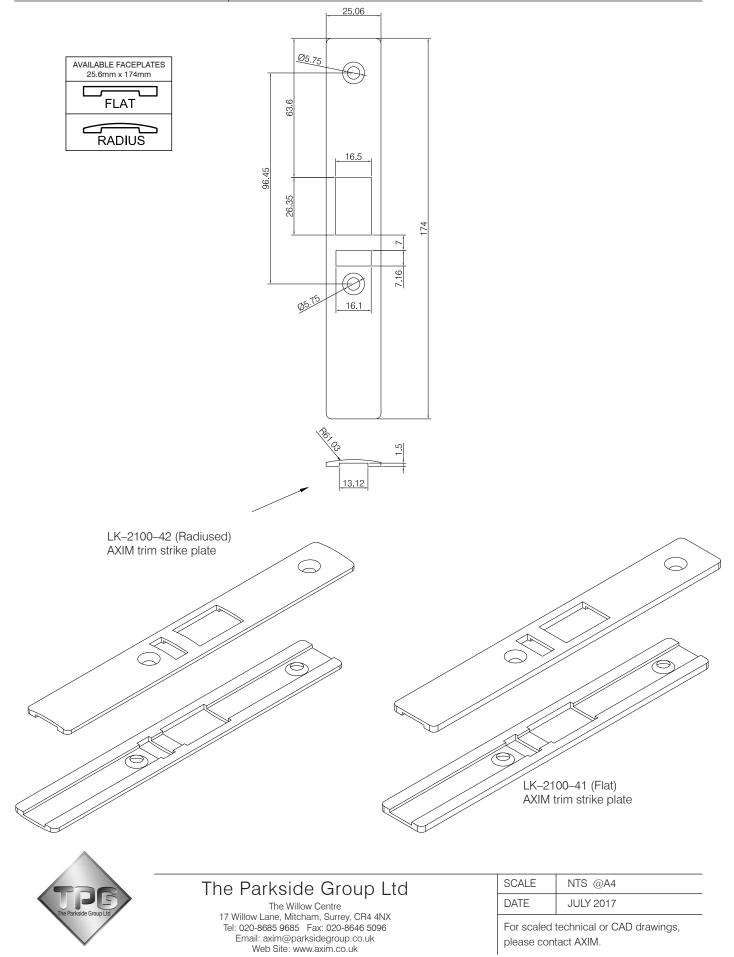



AVAILABLE FACEPLATES 25mm x 174mm

FLAT

RADIUS


E

٢


TITLE DEADLATCH FACE PLATE LK-2100 SERIES


SHEET No. 7:09.1

SUB TITLE FACE PLATE LK-2100-43/44

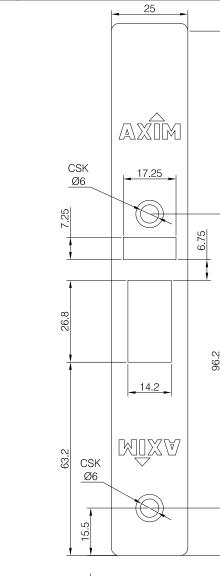

S 171.





 \bigcirc

LK-2100-43 (Flat) AXIM trim strike plate SC

 \bigcirc

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2018 |

 \bigcirc

, The second se

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

The Parkside Group Ltd

 \bigcirc



| TITLE | DEADLATCH FACE PLATE |
|-------|----------------------|
| | LK-2100 SERIES |

SHEET No. 7:09.2

SUB TITLE INTENTIONALLY BLANK





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | FEBRUARY 2018 |



DEADLATCHES LK-2100 SERIES

7:10

SUB TITLE ASSEMBLY DETAILS LK-2100 REVERSIBLE DEADLATCH

The Fully reversible LK-2100 Standard duty deadlatch range offers flexibility of traffic control during and after business hours.

TITLE

Fully Reversible Latchbolt Without the need to open the deadlatch case. (Full Instructions included with the product)

Latchbolt Holdback

A reverse Turn of the key while the bolt is held retracted retains the latchbolt in the case, This allows two-way traffic for ideal use in hospitals, banks, shops and any other commercial buildings. which may require :

Free access and exit at certain times, and Controlled access and free exit at other times.

The Axim LK-2100 deadlatch product is an ideal product to be used and specified along with the Axim ES-2100 Electric Strike range offering a remote access control solution for doors.

Alternatively the LK-2100 range can be equally installed with the LK-2100-6515 (48mm) and the LK-2100-7515 (72mm). - see overleaf for ordering codes

Key Points

The Axim Deadlatch is an all metal case complete with the main latch body structure to prevent unauthorised case entry.


The LK-2100 is available with Flat face or Radius face faceplates that are Ordered as separate items - see overleaf for ordering codes.

Fully Reversible Latchbolt without opening the Deadlatch case.

Related Hardware

LK2100 - E Reversible Euro Profile Deadlatch

ES2200 Electric Strike

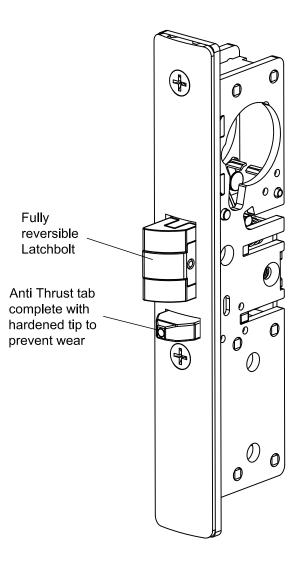

A Nylon Insert is added to the latchbolt to prevent friction in operation.

Suitable for use on Aluminium Doors

Guarantee:

Axim Products are guaranteed for 30 months against defects in material and / or workmanship. This guarantee is Void if the product has been incorrectly specified or installed.

Corrosion resistance: BS EN 1670 Grade 3




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------------|
| DATE | SEPTEMBER 2023 |

| TITLE | DEADLATCHES LK-2100 SERIES | SHEET No. 7:11 |
|-----------|--|--------------------------|
| SUB TITLE | ASSEMBLY DETAILS LK-2100 REVERSIBLE DEADLATCH | |

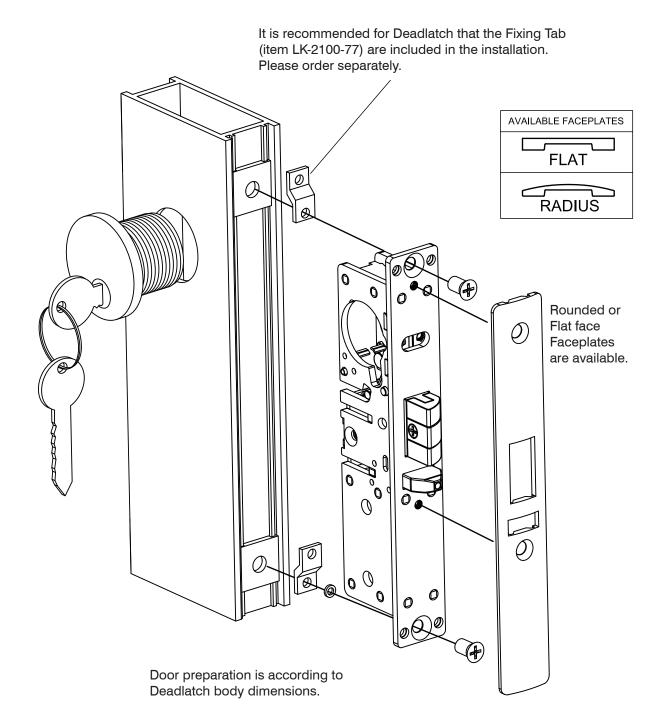



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|-------------|
| DATE | AUGUST 2016 |



TITLE DEADLATCHES LK-2100 SERIES

SUB TITLE ASSEMBLY DETAILS LK-2100 REVERSIBLE DEADLATCH (ROUND CYLINDER)



0

⊕(⊕


22.5

п

0

Œ

п

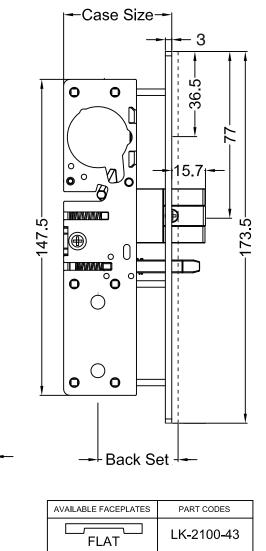

Case Size & Backset vary depending on version:

Backset Options

25mm (31/32") Backset 28mm (1-1/8") Backset 38mm (1-1/2") Backset

Case:

Steel with corrosion resistant plating.

Latchbolt:

Fully Reversible Latchbolt - Without the need to Open the case. Latchbolt complete with Hardened Steel Internal Pins.

Faceplate:

173.5 x 25mm Aluminium material, Finish: Matt / Satin Anodised Aluminium.

Faceplate: -----

Ordering Information

RADIUS


| LK-2100-25-E | Euro Profile Deadlatch Case (24.6mm Backset) |
|--------------|---|
| LK-2100-28-E | Euro Profile Deadlatch Case (28.6mm Backset) |
| LK-2100-38-E | Euro Profile Deadlatch Case (38.1mm Backset) |
| LK-2100-25-R | Screw in Cylinder Deadlatch Case (24.6mm Backset) |
| LK-2100-28-R | Screw in Cylinder Deadlatch Case (28.6mm Backset) |
| LK-2100-38-R | Screw in Cylinder Deadlatch Case (38.1mm Backset) |
| LK-2100-43 | Axim Misc - Flat face plate |
| LK-2100-44 | Axim Misc - Radius face plate |
| LK-2100-6515 | 48mm Strike for LK-2100 Reversible Deadlatch |
| LK-2100-7515 | 72mm Strike for LK-2100 Reversible Deadlatch |
| LK-2100-77 | Fixing Tab Kit |

LK-2100-44



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk SCALE NTS @A4 DATE DECEMBER 2017

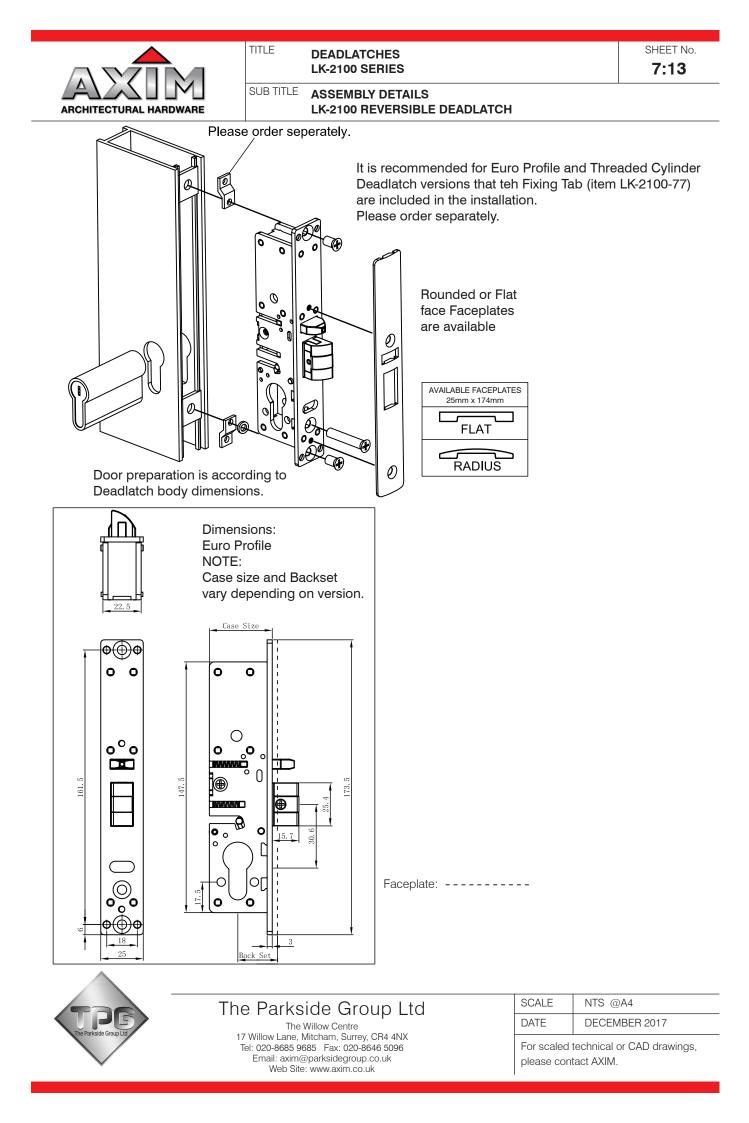




E



PLEASE NOTE This product Is Reversible To Suit Left Hand Or Right Hand For Handing

Do Not open the case




1)

Ő

Ó

00

Depress the Latchbolt until the screw in the Side of the Latchbolt can be seen through the hole in the Deadlatch case (larger backset versions allow easier access to this screw).

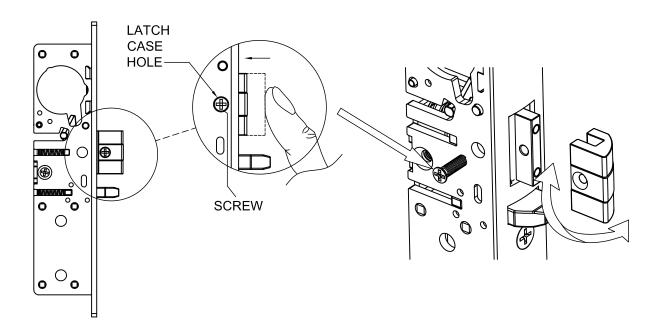

2) Remove the Machine Screw to allow the Latchbolt to be removed.

3) Reverse the Latchbolt and re install ensuring that the screw is replaced securely.



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk SCALENTS @A4DATEAUGUST 2016

For scaled technical or CAD drawings, please contact AXIM.

SHEET No. 7:14



| TITLE | DEADLATCHES LK-2100 SERIES | SHEET No. 7:15 |
|-----------|-------------------------------|--------------------------|
| SUB TITLE | INTERNTIONALLY BLANK | |
| | | |





The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |

| TITLE | ELECTRIC STRIKE ES-2200 SERIES | SHEET No. 7:16 |
|-----------|---|--------------------------|
| SUB TITLE | ASSEMBLY DETAILS ES-2200 ELECTRIC STRIKE | |

The Axim ES-2200 series of electric strikes are an ANSI style door release, complete with stainless-steel short or long faceplates for use in metal or timber door frame applications. The electric release is designed to work with most leading brand deadlocking night latch locks. The ES-2200 also has two forms of monitoring available: latch (ES-2200-M) or latch with dual monitoring, open or closed (ES-2200-DM).

The Axim ES-2200 series are shipped as fail secure and can be converted to fail safe mode by the simple removal of a screw. The Axim ES-2200 can also be set to 12V or 24V by simply reconfiguring the wires in a different sequence.

Technical Specification:


Application

Fail - Safe or Fail Secure Note: DC Power supply required for Fail Safe Operation. **Maximum Holding Force** 450kgs **Case Detail:** 86mm x 32.8mm x 40mm Zinc Aluminium Alloy Material **Faceplates:** 124mm x 31.7mm - Flat Design, Stainless Steel material. 201.5mm x 31.7mm - Flat Design, Stainless Steel material, Finish: Brushed / Stainless Steel. Mechanism Design: Stainless Steel Internal Blocking Mechanism. **Strike Aperture Detail:** 44.7mm (Length) x 19mm (Width) x 13.3mm (Depth) Stainless Steel retaining jaw. Suitable Door Gap: Min. 3mm (1/8") Operational 3-5mm

Testing:

ANSI / BHMA 156.5 Grade 1 CE Marked - Electrical

Product Options and Accessories ES-2200-S ES-2200-M (Monitored) ES-2200-DM (Dual Monitored) ES-2200-EL10 Extension Lip (10mm) ES-2200-EL25 Extension Lip (25mm) ES-22000-EL50 Extension Lip (50mm)






The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | NOVEMBER 2019 |



| TITLE | ELECTRIC STRIKE ES-2200 SERIES |
|-----------|-----------------------------------|
| SUB TITLE | ASSEMBLY DETAILS |
| | ES-2200 ELECTRIC STRIKE |





Long Faceplate

Wiring Instructions:

Voltage:

| 12Volt | 24Volt | |
|--------------------------------|-----------------------------|--|
| Red Black TNR330 + Green | Red TNR330 + Black Green | |
| Blue | Blue | |

| 12Volt Red Black Green Blue | Red Black Green Blue | Lock Sensor: Purple Com Brown NC Yellow NO | <u>Door Sensor:</u> Orange Com White NC Grey NO |
|---|-------------------------------|---|--|
|---|-------------------------------|---|--|

Sensor contact rating: 1A Max, 30V AC/DC

**MOV provided with the package, to be used for surge protection between + and - Power terminals.

The strike can be used in either fail safe or fail secure mode. Ensure that the screw is positioned in either hole as per illustration, and either function can be achieved.





| TITLE | ELECTRIC STRIKE ES-2200 SERIES | SHEET No. 7:18 |
|-----------|-----------------------------------|-------------------|
| SUB TITLE | ASSEMBLY DETAILS | |
| | ES-2200 ELECTRIC STRIKE | |

General Installation Instructions:

1. Check with a suitable meter if the regulated power supply or controller being used to operate the strike can provide the required voltage within a +/- 10% tolerance, and that the voltage can be stable during operation under all circumstances.


Warning: Damages caused by connection of an incorrect voltage are not covered by the product warranty.

2. Make a mounting hole on the door frame using the body of the strike as the template to make a proper cutout. Ensure that if the mortise lock being used has a deadlocking snib or trigger, the location of the strike must not allow the snib to enter the 'keep' area.

3. Position the strike and drill the two fixing holes.

4. Ensure that all wiring is correctly terminated and not snagged within the mortise. Install the strike temporarily in this correct position and check that there is no mechanical interference between the door, the lock faceplate and the strike face and extension lip (if fitted) during the closing cycle.

- 5. Check that no side load pressure is exerted on the strike when the door is closed.
- 6. Secure the strike and re-check operation.

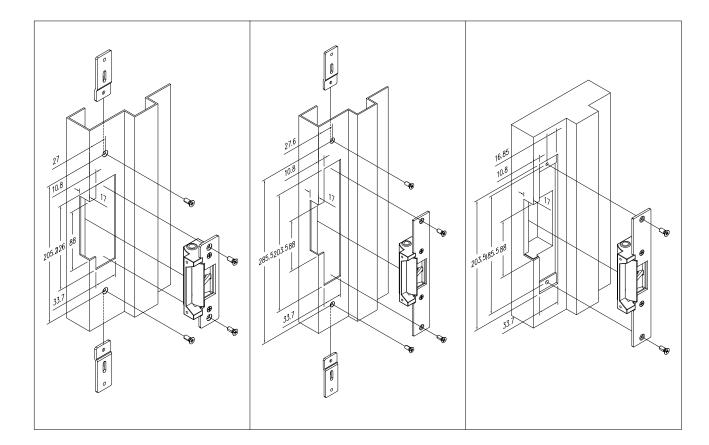




The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk SCALENTS @A4DATENOVEMBER 2019



SUB TITLE ASSEMBLY DETAILS

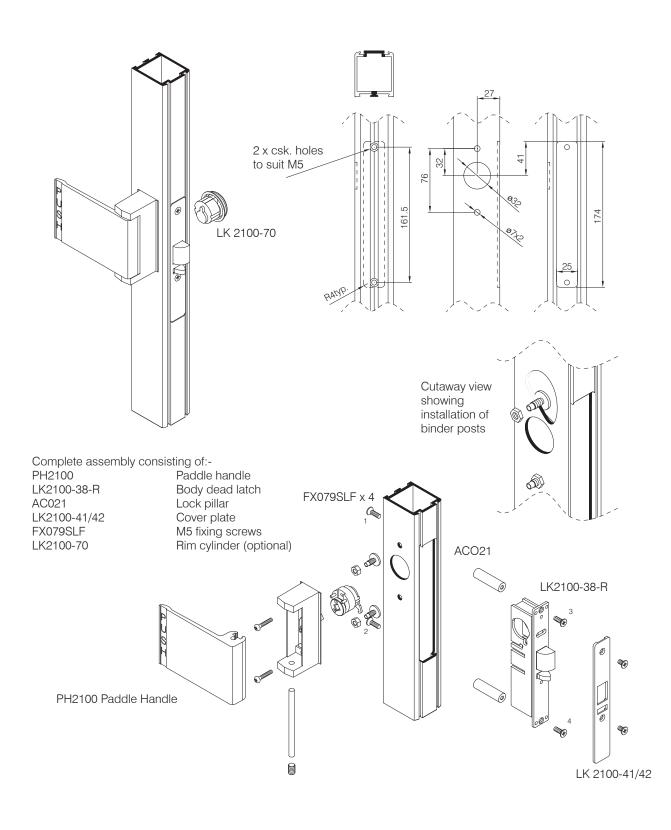



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|----------|
| DATE | MAY 2024 |



TITLE PADDLE HANDLE AND LEVER HANDLE PH-2100 SERIES

SUB TITLE TECHNICAL INFORMATION

The Axim 2100 series of handles, designed for narrow stile hollow metal and timber doors, provide the market with quality products at an affordable price.

PUSH/PULL HANDLE

The 2100 series of push/ pull paddle handle is designed to operate with the 2100 series latch lock via a cam plug supplied.

The handle can be fitted to either side of the door and a standard rim cylinder can be fitted to the reverse side for access.

LEVER HANDLE

The 2100 series lever handle is also designed to operate with the 2100 series latch lock.

CAM PLUG

Secured in the latch body by cylinder set screw. It is also


rigidly tied to lever handle escutcheon by steel pins.

MATERIAL FINISH

The paddle handle and lever handle are satin silver anodised aluminium, with zinc plated steel internal components.

| PRODUCT CODES | | A |
|--|------------|---|
| PH-2100 SERIES PUSH/PULL Paddle Handle (Complete with cam) | | |
| Pull to the left | PH-2100-61 | |
| Push to the left | PH-2100-62 | |
| Pull to the right | PH-2100-63 | |
| Push to the right | PH-2100-64 | |
| <u> </u> | | |

| P/CODES | OPERATION | | USE |
|------------|------------------|--|--|
| PH-2100-61 | | | Outside of left hand reverse door or inside of right hand. |
| PH-2100-62 | PUSH TO LEFT | | Outside of left hand door or inside of right hand reverse. |
| PH-2100-63 | PULL TO RIGHT | | Outside of right hand reverse door or inside of left hand. |
| PH-2100-64 | PUSH TO RIGHT | | Outside of right hand door or inside of left hand reverse. |

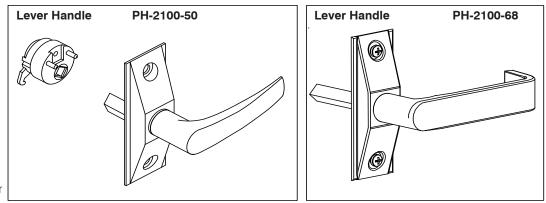




The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | NOVEMBER 2019 |

| | TITLE | RIM CYLINDER & THUMB TURN | SHEET No. 7:21 |
|------------------------|-----------|---|--------------------------|
| ARCHITECTURAL HARDWARE | SUB TITLE | ASSEMBLY DETAILS LK2100-75 CYL WITH LK2100-76 TT | |





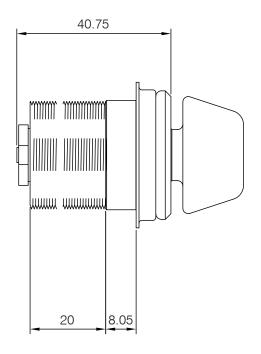











The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|---------------|
| DATE | NOVEMBER 2019 |




LETTER PLATES LP-500 SERIES

SUB TITLE LETTER PLATE AND EXTENSION SLEEVE EX-570


TITLE

LP-500 LETTER PLATE

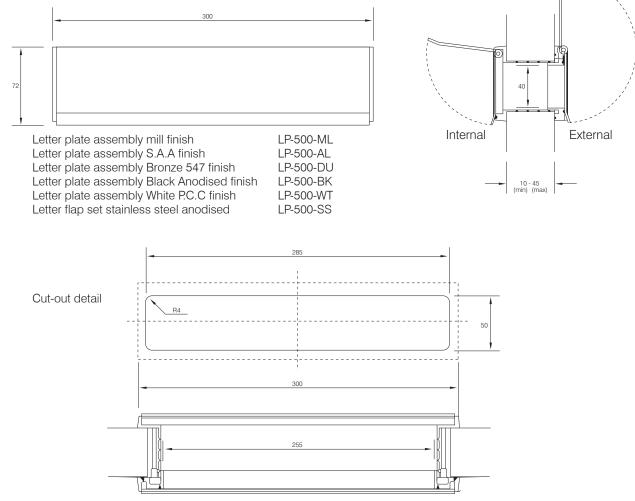


EX-570 LETTER PLATE EXTENSION SLEEVE

Letter plate extension sleeve EX-570 supplied with 2 No. Spring Clips and 120mm Fixing Screws.

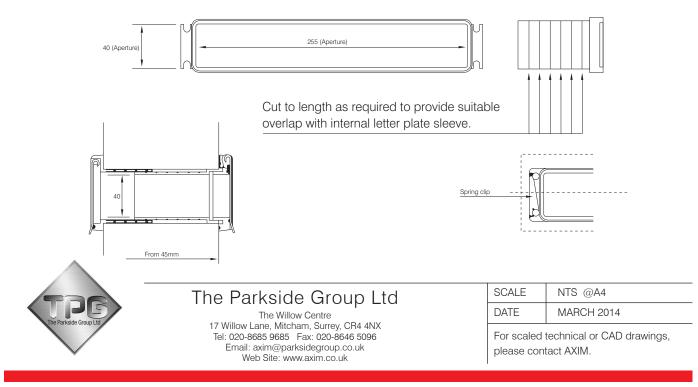





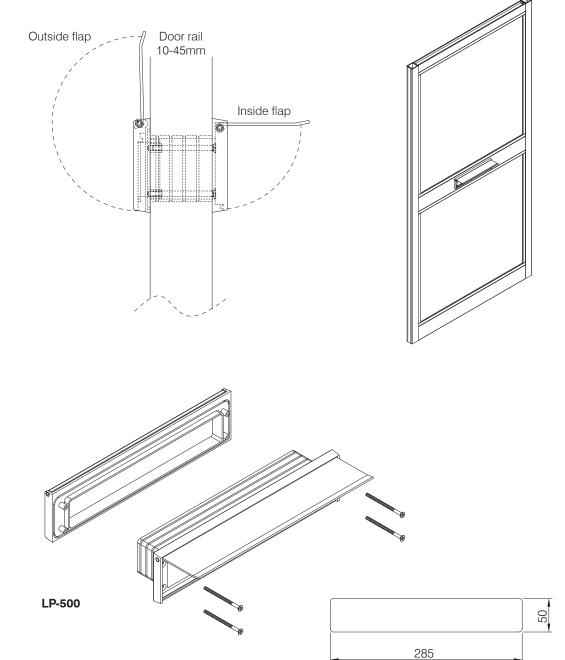

Rail preparation: 285 x 50mm cut out *No fixing holes necessary*



The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |





LETTER PLATES LP-500 SERIES

SUB TITLE EXTENSION SLEEVE

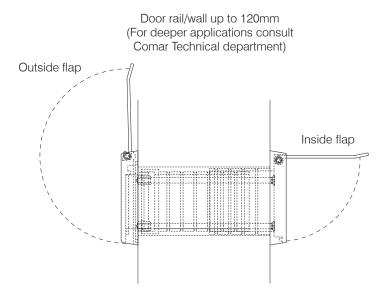

TITLE



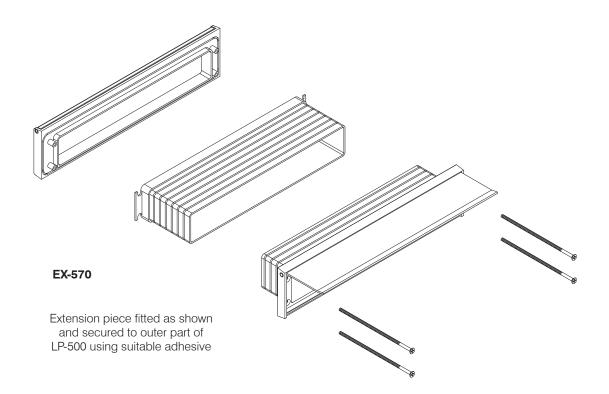



The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

| SCALE | NTS @A4 |
|-------|------------|
| DATE | MARCH 2014 |