


#### TITLE **BUDGET / CONTRACT CLOSER** FC-3000 SERIES

SHEET No.


#### SUB TITLE INSTALLATION INSTRUCTIONS



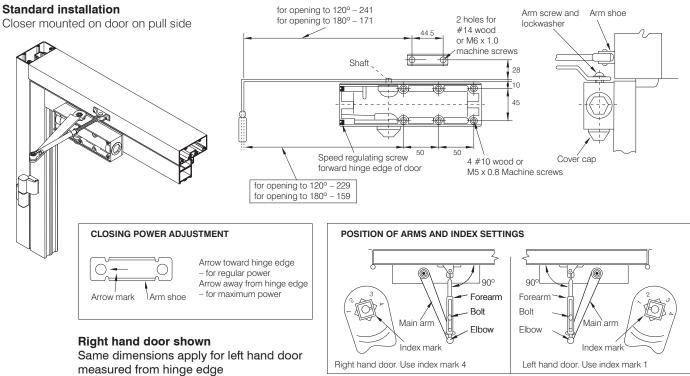

## Top jamb installation

Closer mounted on top jamb on push side of door. Reveals of 70 to 127 requires long top jamb forearms

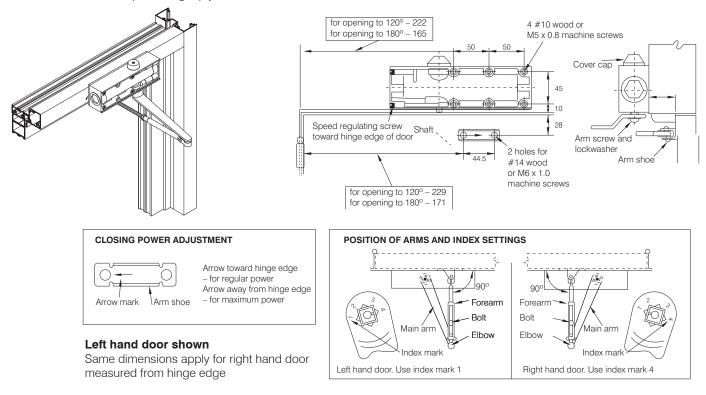



Web Site: www.axim.co.uk



## TITLE BUDGET / CONTRACT CLOSER FC-3000 SERIES


## SUB TITLE INSTALLATION INSTRUCTIONS


## Parallel arm installation


Closer mounted on door on push side

## Left hand door shown


Same dimensions apply for right hand door measured from hinge edge.

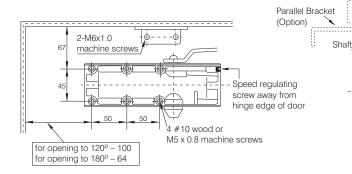






# POSITION OF ARMS AND INDEX SETTINGS





## Instructions

Step 1

- A. Check hand of door.
- B. Select type of installation.

## Step 2

- A. See instructions for installation you have selected.
- B. Follow instructions for correct application and adjustment.

## Step 3

- A. Apply closer body and forearm (or parallel bracket and forearm) to door and frame as shown.
- B. Place main arm on shaft at proper index mark as shown and tighten arm screw with lockwasher securely.
- C. Adjust length of forearm as shown and attach to main arm at elbow and tighten locknut bolt.

## Step 4

Fixing cover cap on shaft at unused side and insert rubber plug into one of unused fixing hole on body then slide in the Faceplate.

## Step 5

Door closing and latching speeds are controlled by #1, #2 speed. regulating screw separately.

- A. Clockwise turns slow the Speed.
- B. Counterclockwise turns increase the speed.




## The Parkside Group Ltd


The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014

AXIM
ARCHITECTURAL HARDWARE

TITLE	BUDGET / CONTRACT CLOSER FC-3000 SERIES	SHEET No. <b>3:21</b>
SUB TITLE	HOLD OPEN ARM (FRICTION TYPE) FC-422-AL	

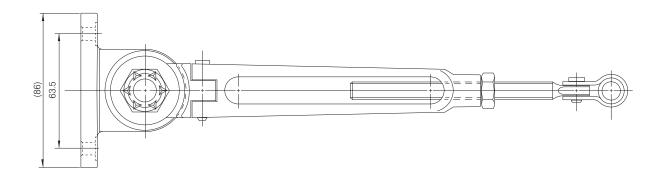






The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014

AXIM	
ARCHITECTURAL HARDWARE	

TITLE	BUDGET / CONTRACT CLOSER FC-3000 SERIES	SHEET No. <b>3:22</b>
SUB TITLE	HOLD OPEN ARM (FRICTION TYPE) FC-422-AL	

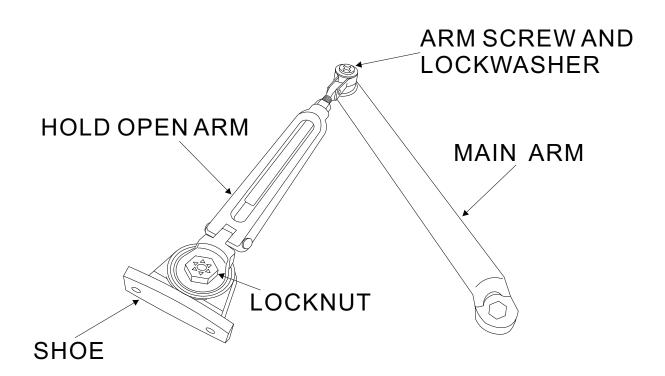




The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014

AXM
ARCHITECTURAL HARDWARE


TITLE	BUDGET / CONTRACT CLOSER FC-3000 SERIES	SHEET No. <b>3:23</b>
SUB TITLE	PARALLEL BRACKET FC-815-AL	

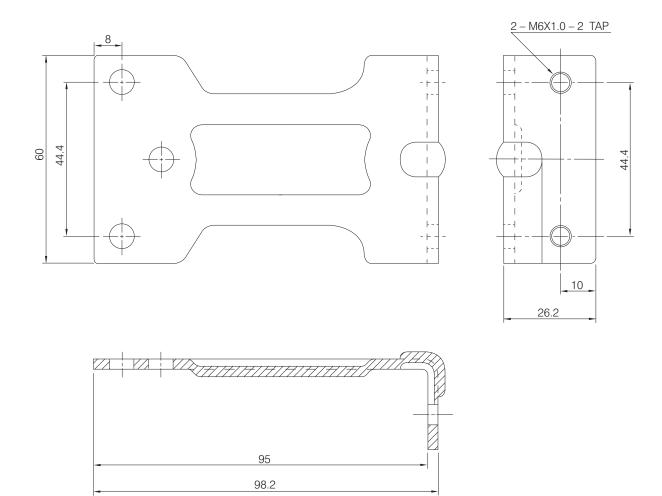



AXIM	
ARCHITECTURAL HARDWARE	

TITLE	BUDGET / CONTRACT CLOSER FC-3000 SERIES	SHEET No. <b>3:24</b>
SUB TITLE	FLAT DROP BRACKET FC-517-AL	

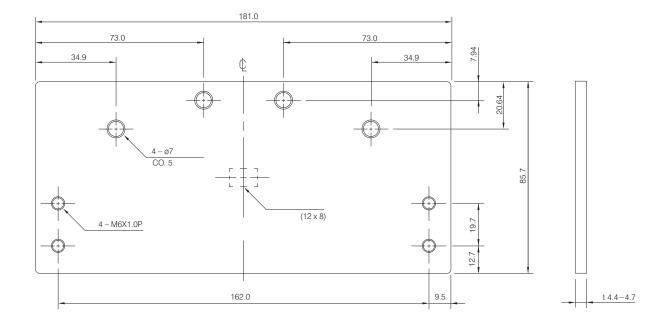




The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014

AXIM	TITLE	BUDGET / CONTRACT CLOSER FC-3000 SERIES
	SUB TITLE	HOLD OPEN ARM (PLUNGER TY
ARCHITECTURAL HARDWARE		

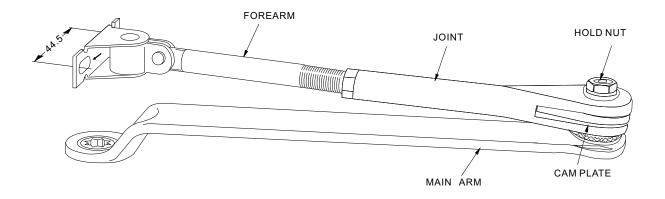



The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014

SHEET No.

3:25


TYPE) FC3000-122-AL





#### TITLE **BUDGET / CONTRACT CLOSER** FC-3000 SERIES

#### SUB TITLE INSTALLATION INSTRUCTIONS






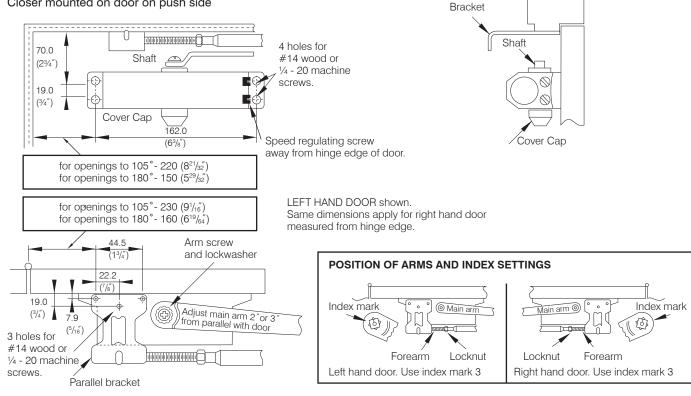

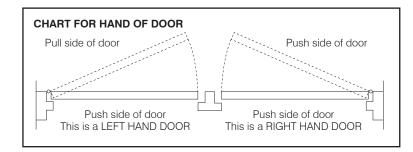

**Closing Speed** Regulating Screw Latching Speed **Regulating Screw** 



## Instructions

## Step 1

A. Check hand of door.

Parallel

B. Select type of installation.

## Step 2

A. See instructions for installation you have selected.

B. Follow instructions for correct application and adjustment.

### Step 3

A. Apply closer body and forearm (or parallel bracket and forearm) to door and frame as shown. B. Place main arm on shaft at proper index mark as shown and tighten arm screw with lockwasher securely. C. Adjust length of forearm as shown and attach to main arm at elbow and tighten locknut.

#### Step 4

Snap cover cap over shaft at unused side.

## Step 5

Door closing and latching speeds are controlled by #1, #2 speed.

Regulating screw separately.

A. Clockwise turns slow the speed.

B. Counterclockwise turns increase the speed.



## The Parkside Group Ltd

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

SCALE	NTS @A4
DATE	MARCH 2014




## TITLE **BUDGET / CONTRACT CLOSER** FC-3000 SERIES

#### SUB TITLE INSTALLATION INSTRUCTIONS

## Standard installation

Closer mounted on door pull side

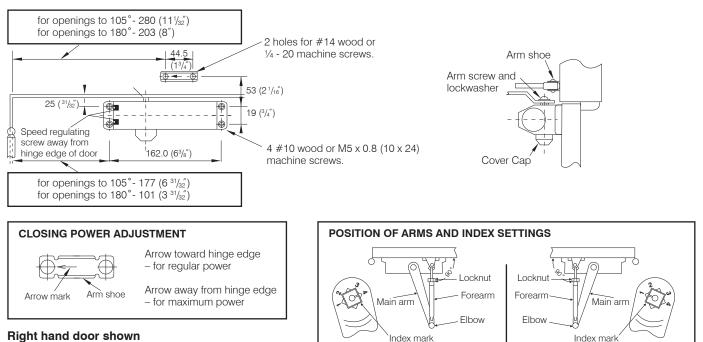


Right hand door. Use index mark 4

Same dimensions apply for left hand door measured from hinge edge.

## Top jamb installation

Closer mounted on top jamb on push side of door. Reveals of 70 (2 ¾") to 127 (5") requires long top jamb forearms.

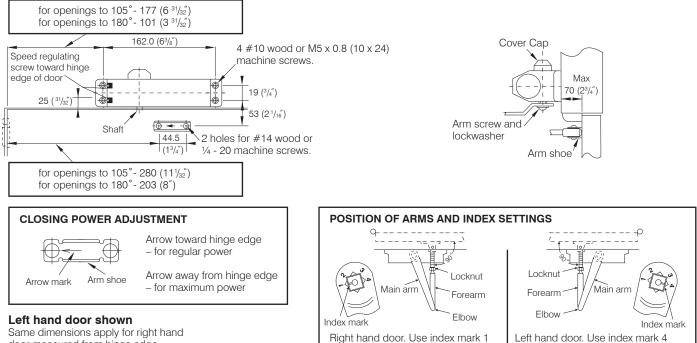

Same dimensions apply for right hand door measured from hinge edge.

> SCALE NTS @A4 DATE MARCH 2014

The Willow Centre 17 Willow Lane, Mitcham, Surrey, CR4 4NX Tel: 020-8685 9685 Fax: 020-8646 5096 Email: axim@parksidegroup.co.uk Web Site: www.axim.co.uk

The Parkside Group Ltd

For scaled technical or CAD drawings, please contact AXIM.

Left hand door. Use index mark 1